

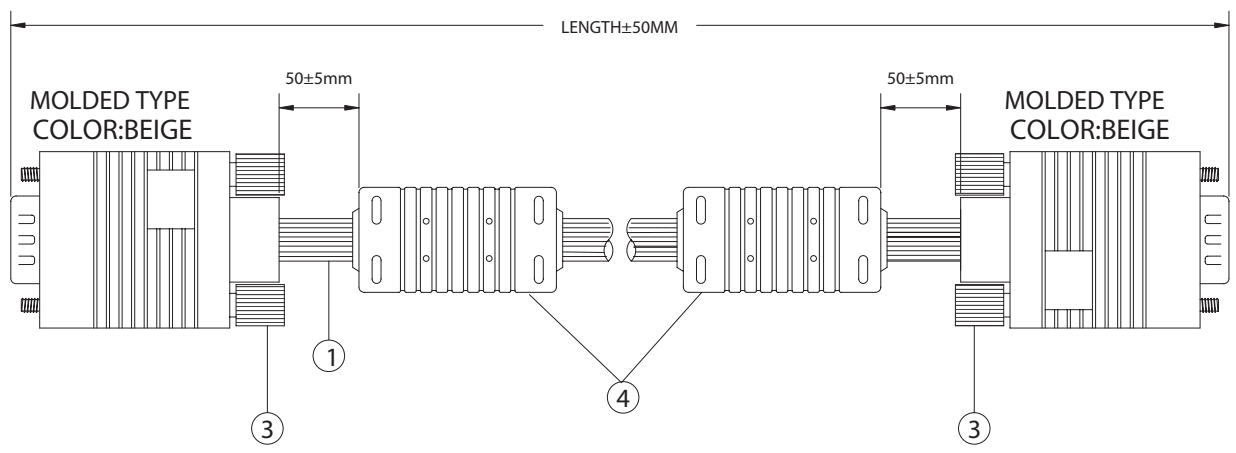



(P1)
HD15 MALE
INSULATOR:BLACK



(P2)
HD15 MALE
INSULATOR:BLACK



CONFIGURATION:

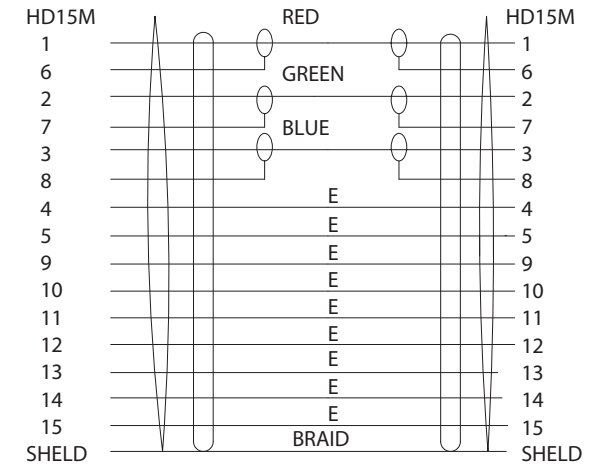

NOTES:

- TEST: OPEN/SHORT, 100% TEST
- ITEM NO. & LENGTH & PACKING:

ITEM NO.	LENGTH	PACKING
RGB-2B	5000MM	W/Ziplock Bag[4]+Sticker-Bar Code
RGB-2C	10000MM	W/Ziplock Bag[5]+Sticker-Bar Code
RGB-2D	15000MM	W/Ziplock Bag[6]+Sticker-Bar Code
RGB-2E	20000MM	W/Ziplock Bag[6]+Sticker-Bar Code

4	FERRITE CORE	RH 17.5mm x 28.5mm x 10.0mm
3	THUMBSCREW	#4-40UNC TYPE
2	CONNECTOR	HD15 MALE MD TYPE
1	CABLE	UL2919 (3C*UL) 792+9C*24AWG, W/AL-MY+BRAID) O.D: 9.0MM
		BEIGE PVC JACKET
NO	PART NAME Q"TY	SPECIFICATION

RANGE	0-10	11-25	26-40	41-60	61-80	81-100	X
TOLERANCE(±)	0.10	0.15	0.20	0.25	0.30	0.35	2%
TITLE:	Buyer	Scale	Unit	Rev.	Dwg.no		
HD15 MALE/ HD15 MALE	DEL	1/1	MM	V2.0	RGB-2 SERIES		
DRN BY	CHK BY	APE BY					