



### Overview

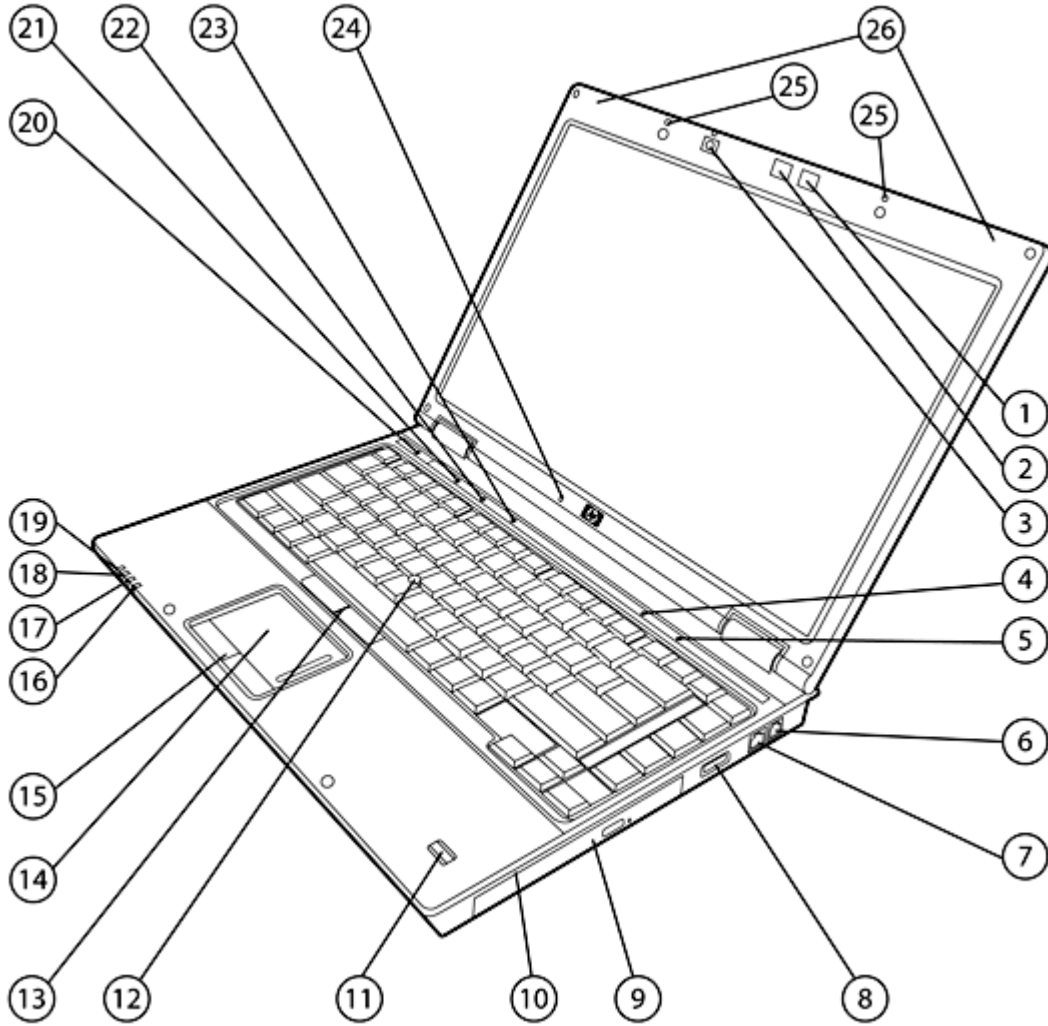

### Overview

1. HP NightLight on/off button
2. HP NightLight
3. Optional 2 MP Webcam
4. Volume mute button with LED indicator
5. Volume scroll zone with up/down LED indicators
6. RJ-11/modem port
7. RJ-45/Ethernet port
8. USB 2.0 port
9. Upgrade Bay (optical drive, second hard drive)
10. Integrated Smart Card Reader
11. HP Fingerprint Sensor
12. Pointstick
13. Pointstick buttons
14. Touchpad with scroll zone
15. Touchpad buttons
16. Hard drive activity / HP 3D DriveGuard LED indicator
17. Battery charging LED indicator
18. Power/standby LED indicator
19. Wireless on/off LED indicator
20. Power button with LED indicator
21. HP Info / HP QuickLook 2 button with LED indicator
22. Wireless on/off button with LED indicator
23. HP Presentation button with LED indicator
24. Ambient Light Sensor
25. Dual-microphone array
26. WLAN and WWAN antennas

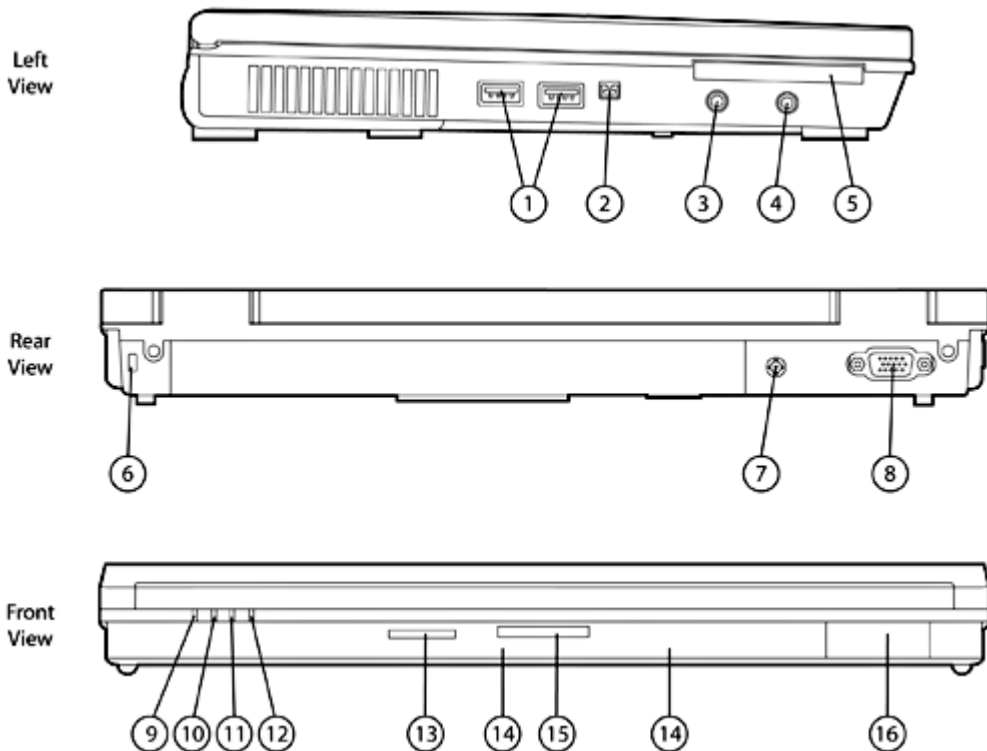


1. (2) USB 2.0 ports
2. 1394a port
3. Stereo microphone in
4. Stereo headphone/line out
5. ExpressCard/54 slot
6. Kensington Lock slot
7. Power connector
9. Wireless on/off LED indicator
10. Power/standby LED indicator
11. Battery charging LED indicator
12. Hard drive activity / HP 3D DriveGuard LED
13. Secure Digital (SD) slot
14. Integrated stereo speakers
15. Display release latch
16. Hard drive activity / HP 3D DriveGuard LED indicator

### Overview

8. VGA connector (external monitor/projector)

16. Bluetooth module compartment

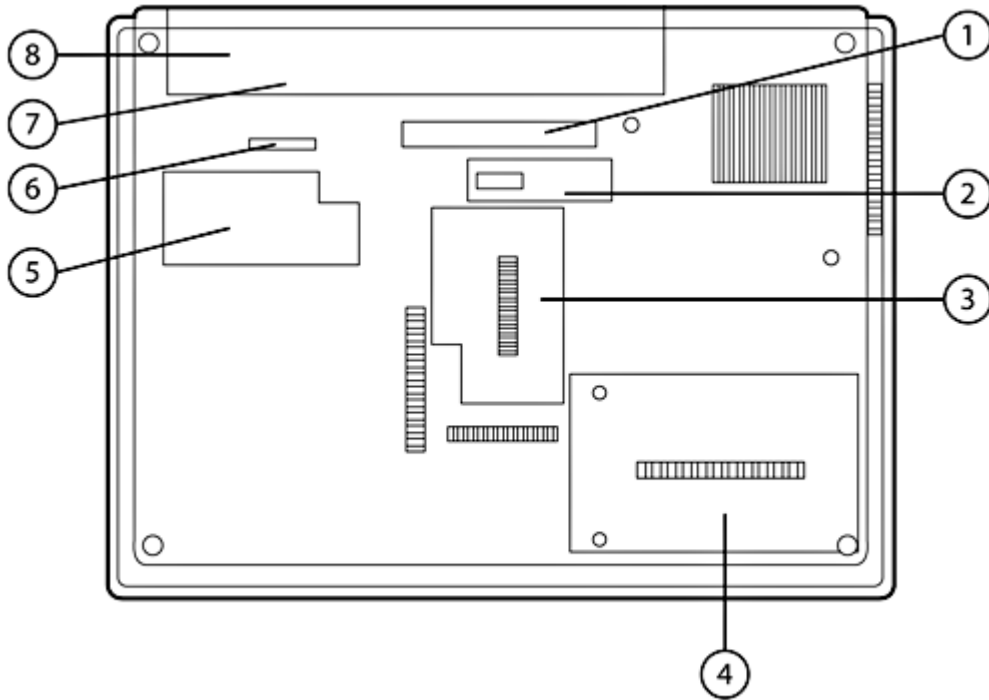

#### Bottom View

- |                                |   |
|--------------------------------|---|
| 1. Docking connector           | 5. WWAN module compartment                                |
| 2. Secondary battery connector | 6. Battery release latch                                  |
| 3. Memory module compartment   | 7. SIM slot for WWAN (select models) – inside battery bay |
| 4. Hard drive bay              | 8. Battery bay  |

**NOTE:** WLAN module connector is located under the keyboard (not shown)

### Overview

#### At A Glance

- Genuine Windows 7 Professional 32, Genuine Windows 7 Home Premium 32, Genuine Windows 7 Home Basic 32, Genuine Windows Vista Business 32, Genuine Windows Vista Home Basic 32, Genuine Windows XP Professional available through downgrade rights from Windows Vista Business , or FreeDOS
- Business Rugged – designed to meet the military standard Mil-Std-810F for drop, shock, vibration, sand and dust, humidity, altitude, and high and low temperature operation\*
- ATI Mobility Radeon™ HD 3450 graphics with 128 or 256 MB dedicated memory or Mobile Intel GMA 4500MHD graphics
- Flexible wireless connectivity options:
  - Integrated HP un2400 EV-DO/HSDPA Mobile Broadband Module provides worldwide Gobi mobile Internet technology
  - Integrated 802.11 a/b/g/n draft 2.0, a/b/g, or b/g wireless LAN module
  - Bluetooth® 2.0
- Intel® Centrino® 2 with vPro™ technology capable, with Intel Core™2 Duo processors
- Optional HP Illumi-Lite LED 14.1-inch diagonal widescreen display with Ambient Light Sensor and optional HP Privacy Filter
- Upgrade Bay for easy optical drive upgrade
- Enhanced security features including integrated Smart Card Reader, HP ProtectTools, HP SpareKey, HP Fingerprint Sensor, TPM 1.2 Embedded Security Chip\*\*
- Optional 2 MP Webcam with Business Card Reader Software, HP Night Light
- HP QuickLook 2 for instant access to email, calendar, and contact information
- Enhanced reliability with HP DuraCase, HP DuraKeys and HP DuraFinish
- Up to 8 GB of 800 MHz DDR2 SDRAM supported, dual channel memory support
- Up to 250 GB 7200 rpm or 5400 rpm user-removable hard drive with HP 3D DriveGuard protection
- Integrated Intel Gigabit Network Connection (10/100/1000 NIC)
- Enhanced dual pointing devices (touchpad with scroll zone and pointstick)
- ExpressCard/54 slot, Secure Digital (SD) slot
- Designed for common image for corporate environments

\* Testing was not intended to demonstrate fitness for DOD contracts requirements or for military use. Test results are not a guarantee of future performance under these test conditions.

\*\* TPM module disabled where not permitted by law (for example, Russia and China).

### Standard Features

#### Processors

Intel Core 2 Duo Processor T9800 (2.93 GHz, 6 MB L2 cache, 1066 MHz FSB)\*  
Intel Core 2 Duo Processor T9550 (2.66 GHz, 6 MB L2 cache, 1066 MHz FSB)\*  
Intel Core 2 Duo Processor T9400 (2.53 GHz, 6 MB L2 cache, 1066 MHz FSB)\*  
Intel Core 2 Duo Processor P8700 (2.53 GHz, 3 MB L2 Cache, 1066 MHz FSB)\*  
Intel Core 2 Duo Processor P8600 (2.40 GHz, 3 MB L2 cache, 1066 MHz FSB)\*  
Intel Core 2 Duo Processor P8400 (2.26 GHz, 3 MB L2 cache, 1066 MHz FSB)\*

\* Intel's numbering is not a measurement of higher performance.

**NOTE:** Processor speed denotes maximum performance mode; processors will run at lower speeds in battery optimization mode.

#### Operating System

##### Preinstalled

Genuine Windows 7 Professional 32\*  
Genuine Windows 7 Home Premium 32\*  
Genuine Windows 7 Home Basic 32\*  
Genuine Windows Vista Business 32\*\*  
Genuine Windows Vista Home Basic 32\*\*  
Genuine Windows XP Professional available through downgrade rights from Windows Vista Business\*\*†  
FreeDOS

##### Supported

Genuine Windows Vista Business 64\*\*  
Genuine Windows Vista Enterprise\*\*

##### Certified

SuSE Linux Enterprise Desktop 10

\* System may require upgraded and/or separately purchased hardware and/or a DVD drive to install the Windows 7 software and take full advantage of Windows 7 functionality. See: <http://www.microsoft.com/windows/windows-7/> for details.

\*\* Certain Windows Vista product features require advanced or additional hardware. See: <http://www.microsoft.com/windowsvista/getready/hardwarereqs.msp> and: <http://www.microsoft.com/windowsvista/getready/capable.msp> for details. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: <http://www.windowsvista.com/upgradeadvisor>.

† Windows XP Professional is preinstalled on this system and includes end user rights and media for Windows Vista Business. You may only use one version at a time. You must back up all data (files, photos, etc.) before uninstalling and installing operating systems to avoid loss of your data.

#### Chipset

Mobile Intel PM45 Express Chipset with ICHM9-Enhanced, 1066 MHz front side bus (models with discrete graphics)  
or  
Mobile Intel GM45 Express Chipset with ICHM9-Enhanced, 1066 MHz front side bus (models with integrated graphics)

### Standard Features

**Intel Centrino 2 with vPro technology capable** Intel Centrino 2 with vPro technology is a selectable feature that is available on units configured with an Intel WiFi Link 5300 or 5100. It provides advances in remote manageability, security, energy efficient performance, and wireless connectivity. Intel Active Management Technology (AMT) offers built-in manageability and proactive security for networked notebook PCs, even when they are powered off\* or when the operating system is inoperable. It can help identify threats before they reach the operating system, isolate infected systems, and update PCs regardless of their power state.

**NOTE:** Some functionality of Intel Centrino 2 with vPro technology, such as Intel Active Management technology and Intel Virtualization technology, requires additional 3rd party software in order to run. Availability of future "virtual appliances" applications for Intel Centrino 2 with vPro technology is dependant on 3rd party software providers. Compatibility with future "virtual appliances" is yet to be determined.

---

### Business Rugged

Meets the military standard Mil-Std-810F\* for:

- Drop: Method 516.5 Proc. IV (26 drops from 30")
- Shock: Method 515.5 Proc. I (Functional)
- Vibration: Method 514.5, Proc I, Cat. 20 & 24
- High Temperature: Method 501.4, Proc I & II (140°F/60°C operational)
- Low Temperature: Method 502.4, Proc I & II (-20°F/-29°C operational)
- Sand and Dust: Method 510.4, Proc. I (Blowing Dust)
- Humidity: Method 507.4 (95% relative humidity)
- Altitude: Method 500.4 Low Pressure, Proc. I & II (15,000 feet operational)

\* Testing was not intended to demonstrate fitness for DOD contracts requirements or for military use. Test results are not a guarantee of future performance under these test conditions.

---

### Graphics

Models with discrete graphics:

ATI Mobility Radeon HD 3450 with 128 MB or 256 MB dedicated video memory  
Microsoft DirectX 10.1 (Shader 4.1) and OpenGL 2.1 capable

Models with integrated graphics:

Mobile Intel Graphics Media Accelerator 4500MHD  
Microsoft DirectX 10 (Shader 4.0) and OpenGL 2.0 capable

---

### Standard Features

<b>Display</b>	<b>Internal</b>	14.1-inch diagonal WXGA anti-glare (1280 x 800 resolution) 14.1-inch diagonal Illumi-Lite LED WXGA anti-glare (1280 x 800 resolution) 14.1-inch diagonal WXGA+ anti-glare (1440 x 900 resolution) Ambient Light Sensor Optional HP Privacy Filter
	<b>External</b>	Up to 32-bit per pixel color depth <b>VGA</b> port supports resolutions up to 2048 x 1536 at 75 Hz, and lower resolutions at up to 100 Hz <b>DVI-D</b> (single link) video signal available through DVI port in optional HP Docking Station (sold separately); supports resolutions up to 1600 x 1200 at both full and reduced blanking, and 1920 x 1200 at reduced blanking Supports 2 external displays (optional HP Docking Station required) <b>NOTE:</b> Resolutions are dependent upon monitor capability, and resolution and color depth settings.

<b>Memory</b>	<b>Standard</b>	800 MHz DDR2 SDRAM; two slots supporting dual channel memory 1024 MB, 2048 MB, 4096 MB, or 8192 MB
	<b>Maximum</b>	Upgradeable to 8192 MB with 4096 MB SODIMMs in slots 1 and 2
	<b>Dual-channel</b>	Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots. <b>NOTE:</b> Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed. Availability of 4 GB or more of memory requires Windows Vista Business 64-bit or Linux. With Windows 32-bit operating systems, memory above 3 GB may not all be available due to system resource requirements.

<b>Communications</b>	Integrated Intel Gigabit Network Connection (10/100/1000 NIC)* 56K V.92 modem**  * The term "10/100/1000" or "Gigabit" Ethernet indicates compliance with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/s. For high-speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.  ** Designed for downloads from 56K modem compliant sources. Maximum achievable download transmission rates currently do not reach 56 KB/s, and will vary with line conditions. Modem availability is subject to country regulatory approval.
-----------------------	--

### Standard Features

#### Wireless Devices

Support for a broad range of secure, integrated wireless LAN and wireless WAN options featuring support for the latest industry standards. Wireless LAN is factory configurable or available as an option to be added later. Broadband Wireless (WWAN) requires Windows Vista Business or Windows XP Professional and is available in select countries as a standard, factory configurable feature or as an option to be added later. Integrated Bluetooth is also available (factory configurable only) and can be combined with any of the supported wireless LAN and wireless WAN options.

#### **HP un2400 EV-DO/HSPA Mobile Broadband Module**

Integrated WWAN module with Gobi global mobile Internet technology that provides worldwide connection to both CDMA (EVDO) and UMTS (HSPA) wireless networks.

**NOTE:** Separately purchased mobile network operator service is required.

Two 850/900/1800/1900/2100 MHz antennas integrated in the top of the display panel support current and future WWAN technologies.

#### **All 802.11 integrated wireless LAN options**

Wi-Fi CERTIFIED\*

Cisco Compatible Extensions support

Wired Equivalent Privacy (WEP) support up to 128-bit keys

Wi-Fi Protected Access (WPA) and WPA2 support

802.1x authentication support, including EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, and LEAP

Advanced Encryption Standard (AES) support

Three antennas integrated in the display enclosure

#### **Intel WiFi Link 5300**

Integrated support for 802.11 a, b, g, and n draft 2.0\*

Up to 450 mbps data rate

#### **Intel WiFi Link 5100**

Integrated support for 802.11 a, b, g, and n draft 2.0\*

Up to 300 mbps data rate

#### **Broadcom 4312G 802.11b/g Wi-Fi Adapter**

Integrated support for 802.11 b and g

Up to 54 mbps data rate

#### **HP Integrated Module with Bluetooth Wireless Technology**

Bluetooth Specification v2.0 compliant

Works with a wide range of Bluetooth devices

\* The specifications for 802.11n draft 2.0 are draft specifications and are not final. If the final specifications differ from the draft specifications, it may affect the ability of the notebook to communicate with other 802.11n WLAN devices. In countries where n draft 2.0 is not allowed, this capability is not enabled (Intel 802.11a/b/g only).

### Standard Features

#### Keyboard

The 101/102-key compatible keyboard features an industry standard, full-pitch key layout with desktop keyboard features, such as the isolated inverted-T cursor control keys, editing keys, both left and right control and alt keys, and 12 function keys. US and International key layouts are available. Other features include an integrated numeric keypad, hotkeys for instant access to power conservation, brightness, and other features, 19 x 19 mm key pitch (center-to-center spacing), 2.5 mm stroke, and comfort-dished keycaps.

HP DuraKeys is a clear coating applied over the notebook keyboard that helps protect the finish and the printed characters on the keys. HP DuraFinish helps protect the finish on the keyboard deck, graphics, and icons from normal wear and tear.

HP Night Light shines directly on the keyboard for low-light conditions.

#### Touch-sensitive controls

Touch-sensitive controls provide easy access to the following features: HP Info Center, HP QuickLook 2, wireless on/off, HP Presentation button, external volume up, volume down, and mute

#### Pointing device

Enhanced dual pointing devices:  
Touchpad with scroll zone, two pick buttons  
and  
Pointstick, two pick buttons

#### Expansion card slots

<b>ExpressCard/54 slot</b>	Supports ExpressCard/54 and ExpressCard/34
<b>Integrated Smart Card Reader</b>	Compatible with ISO 7816 compliant Smart Cards PC/SC interface support
<b>Secure Digital slot</b>	Supports SD (Secure Digital), MultiMedia Card

#### Storage

<b>Internal Storage Device</b>	120/160/250 GB 5400 rpm SMART SATA II Hard Drive 160/250 GB 7200 rpm SMART SATA II Hard Drive 80 GB Solid State Drive
--------------------------------	---

**NOTE:** Hard drives are customer removable and will withstand multiple insertion/removal cycles. Up to 10 GB is reserved for the system recovery software.

<b>HP 3D DriveGuard</b>	The hard drive is mounted directly to the notebook frame, reducing the transmission of shock away from the hard drive. Uses three-axis digital motion detection with intelligent sensitivity to help protect the hard drive during normal use from shock and vibration. The digital accelerometer temporarily halts all data transfer and parks the hard drive when abrupt motion is detected.	
-------------------------	--	--

#### Upgrade Bay

Fixed 12.7 mm SATA optical drive	Blu-ray R/RE DVD+/-RW SuperMulti DL Drive DVD+/-RW SuperMulti DL LightScribe Drive DVD-ROM Drive
or	
Second hard drive*	250 GB 5400 rpm SMART SATA II Hard Drive

\* For RAID configurations, both hard drive capacities must be equal.

### Standard Features

---

<b>Interfaces</b>	<b>ExpressCard/54 slot</b>	One
	<b>Smart Card Reader</b>	One
	<b>External monitor</b>	One (VGA)
	<b>1394a</b>	One
	<b>Stereo microphone in</b>	One
	<b>Stereo headphone/line out</b>	One
	<b>Power connector</b>	One
	<b>RJ-11/modem</b>	One
	<b>RJ-45/Ethernet</b>	One
	<b>USB 2.0</b>	Three
	<b>Docking connector</b>	One
	<b>Secondary battery connector</b>	One
	<b>LED status indicators</b>	Fifteen

---

### Audio/Visual

High Definition Audio support w/24-bit DAC  
Integrated stereo speakers  
Integrated dual-microphone array  
Touch-sensitive controls for volume up, volume down, and mute  
Stereo headphone/line out  
Stereo microphone in

Optional 2 MP Webcam with Business Card Reader Software

- Supports videoconferencing and still image capture
  - Large image sensor for excellent color matching and good low light sensitivity
  - Up to 30 frames/sec
  - AutoMacro focus lens
  - Video capture at VGA, 1.3 Mpixel, and 2 Mpixel resolutions
  - 16-bit true color (camera sensors output YCrCb format among others)
-

### Standard Features

#### Software

#### Preinstalled software with Windows Vista or Windows XP

HP Recovery Manager (Vista only)  
HP Help and Support Center  
HP QuickLook 2  
HP Universal Print Driver  
HP ProtectTools Security Manager:  
    BIOS Configuration for HP ProtectTools  
    Credential Manager for HP ProtectTools  
    Device Access Manager for HP ProtectTools  
    Drive Encryption for HP ProtectTools  
    Embedded Security for HP ProtectTools  
HP Quick Launch Buttons  
HP Wireless Assistant  
Microsoft Office Ready with 60-day Office Professional 2007 Trial Edition (select models)  
PDF Complete Special Edition  
Intervideo WinDVD – DVD Player  
Roxio Creator Business (for optional DVD+/-RW and DVD/CD-RW drives)  
McAfee Total Protection\*  
Synaptics Touchpad Driver  
Microsoft Windows Live Messenger (select models)  
HP Webcam Software (select models)

#### Additional software available from the web

HP SoftPaq Download Manager  
HP Client Manager Software  
HP Client Management Solutions  
Java Card Security for HP ProtectTools

\* 60 day trial period for McAfee Total Protection for Small Business software. Internet access required to receive updates. First update included. Subscription required for updates thereafter.

---

#### HP Recovery Manager (Vista only)

Each unit is shipped with HP Recovery Manager. HP Recovery Manager enables fast recovery of the factory preinstalled image if the system becomes corrupted or if important system files are accidentally deleted. Up to 10 GB of the hard drive is reserved for the system recovery software.

---

#### SMBIOS Version 2.4

System Management BIOS, previously known as DMI BIOS, is used to store system management information.

---

### Standard Features

**HP ProtectTools Security Manager** HP ProtectTools Security Manager is the security platform for business notebooks and desktops. The HP ProtectTools Security Manager is an extensible client security console that delivers enhanced security capabilities through add-on software modules. Modules currently available are:

- BIOS Configuration for HP ProtectTools
- Credential Manager for HP ProtectTools
- Device Access Manager for HP ProtectTools
- Drive Encryption for HP ProtectTools
- File Sanitizer for HP ProtectTools
- Set-up Wizard for HP ProtectTools
- Privacy Manager for HP ProtectTools (Chat & Sign)
- Embedded Security for HP ProtectTools
- Java Card Security for HP ProtectTools

### Security

#### Standard Features

HP ProtectTools Security Manager  
Enhanced Pre-Boot Security  
HP SpareKey  
One-Step Logon  
HP Fingerprint Sensor  
Integrated Smart Card Reader  
Configuration Control Hardware  
Memory Change Alert  
Ownership Tag  
Setup Password  
Power-On Password  
TPM 1.2 Embedded Security Chip\*  
TPM Enhanced DriveLock\*  
HP Disk Sanitizer  
HP 3D DriveGuard  
Kensington Lock Slot  
Support for Computrace / LoJack for Laptops (must be purchased separately)

#### Optional Features

##### HP Privacy Filter

Narrows viewing area so that screen data is visible only to persons directly in front of the monitor

\* TPM module disabled where use is restricted by law; for example, Russia and China.

For more information on HP security solutions refer to: <http://www.hp.com/go/security>.

### Power Supply

External 90-watt Smart AC adapter, 6-foot (1.8 meter) power cord included.  
Total length including external AC adapter is 12 feet (3.66 meter).  
HP Fast Charge\*

\* HP Fast Charge recharges your battery up to 90% within 90 minutes when the system is off. HP Fast Charge does not apply to 12-cell Ultra-Capacity batteries.

### Standard Features

<b>Battery</b>	<b>Primary battery</b>	6-cell (55 WHr) Li-Ion battery 4-cell (37 WHr) Li-Ion battery
	<b>Optional HP Extended Life Battery</b>	8-cell (52 WHr) high capacity Li-Ion battery
	<b>Optional HP Ultra-Capacity Battery</b>	12-cell (95 WHr) high capacity Li-Ion battery

<b>Battery Life</b>		<b>6-cell Primary with integrated graphics and CCFL display</b>	<b>6-cell Primary with integrated graphics and Illumi-Light LED display and Intel 80 GB Solid State Drive</b>
	<b>Primary battery</b>	Up to 6 hours and 15 minutes	Up to 8 hours and 45 minutes
	<b>Primary battery and optional HP Extended Life Battery</b>	Up to 13 hours	Up to 17 hours and 30 minutes
	<b>Primary battery and optional HP Ultra-Capacity Battery</b>	Up to 17 hours and 15 minutes	Up to 24 hours

**NOTE:** The listed battery life measurements were taken on models running Microsoft Windows XP Professional. Battery life will vary depending on the product configuration, product model, applications loaded on the product, power management settings of the product, and the product features used by the customer. As with all batteries, the maximum capacity of this battery will decrease with time and usage.

**System Standby Time**  
Up to 1 week

**Power Conservation**  
Supports enhanced Intel SpeedStep technology with Intel Core 2 Duo (allows Battery Optimized Mode, Maximum Performance Mode, or Automatic mode)  
Intel Display Power Saving technology (models with integrated graphics)  
ATI PowerPlay technology (models with discrete graphics)  
Hibernation  
Standby  
ACPI compliance

### Standard Features

#### Docking and Stands

HP Advanced Docking Station  
 HP Basic Docking Station  
 HP Standard Monitor Stand  
 HP Adjustable Notebook Stand  
 HP External MultiBay II Cradle

HP's shared docking solutions provide simple and convenient port replication and cable management. Features include Gigabit NIC pass through, modem pass through, legacy parallel and serial ports, USB 2.0 ports, integrated security mechanism\*, integrated MultiBay II and ExpressCard\*\* slots. These docking solutions are compatible across multiple Business Notebook platforms enabling a lower total cost of ownership.

\* HP/Kensington Cable Lock required (purchased separately)

\*\* HP Advanced Docking Station only

#### Service and Support

HP Services offers 3-year warranty depending on country; 1-year limited warranty on primary battery. On-site service and warranty upgrades are also available. HP Care Pack Services extend service contracts beyond the standard warranties. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: <http://www.hp.com/go/lookuptool>. Additional HP Care Pack Services information by product is available at: <http://www.hp.com/hps/carepack>.

**NOTE:** Certain restrictions and exclusions apply. Consult the HP Customer Support Center for details. <http://h20000.www2.hp.com/bizsupport/TechSupport/ProductRoot.jsp>.

#### Select Model(s)

HP's Global Product Offer includes Global Series Preconfigured (GS-P) and Configurable (GS-C) products. GPO delivers globally consistent products, services, and solutions with End-of-Life (EOL) transition management. These products reduce IT complexity, lower management costs, increase productivity, and simplify product transitions.

<b>6930p</b> FL488AW#xxx Global SKU (see exceptions below)	<b>Processor</b>	Intel Core 2 Duo Processor P8600 (2.40 GHz, 3 MB L2 cache, 1066 MHz FSB)
	<b>Intel Centrino 2 with vPro technology</b>	Enabled
FL489AW#xxx (for Latin America, Australia, New Zealand)	<b>Operating System</b>	Genuine Windows Vista Business 32 with Office Ready
	<b>System Memory</b>	2048 MB 800 MHz DDR2 (1 DIMM)
<b>NOTE:</b> Components may vary based on local regulatory requirements	<b>Hard Drive</b>	160 GB 5400 rpm SMART SATA II
	<b>Upgrade Bay</b>	DVD+/-RW SuperMulti DL LightScribe Drive
	<b>Display</b>	14.1-inch diagonal WXGA anti-glare
	<b>Graphics</b>	Mobile Intel GMA 4500MHD
	<b>Webcam</b>	No
	<b>Audio</b>	ADI High Definition CODEC Stereo headphone/line out and microphone in Integrated microphone
	<b>Communications</b>	Integrated Intel Gigabit Network Connection (10/100/1000 NIC) 56K V.92 modem
	<b>Integrated Wireless</b>	Intel WiFi Link 5300 (802.11 a/b/g/n draft 2.0)

### Standard Features

<b>Integrated Security</b>	Drive Encryption for HP ProtectTools HP Fingerprint Sensor TPM 1.2*
<b>Pointing Device</b>	Dual pointing devices (Touchpad and Pointstick)
<b>Battery</b>	6-cell (55 WHr) Li-Ion
<b>Power</b>	External 90W adapter
<b>Warranty</b>	3/3/0 or 3/3/3 depending on country

\* TPM module disabled where use is restricted by law; for example, Russia and China.

<b>6930p</b> FL490AW#xxx Global SKU (see exceptions below)	<b>Processor</b>	Intel Core 2 Duo Processor T9400 (2.53 GHz, 6 MB L2 cache, 1066 MHz FSB)
	<b>Intel Centrino 2 with vPro technology</b>	Enabled
FL491AW#xxx (for Latin America, Australia, New Zealand)	<b>Operating System</b>	Genuine Windows Vista Business 32 with Office Ready
	<b>System Memory</b>	2048 MB 800 MHz DDR2 (1 DIMM)
<b>NOTE:</b> Components may vary based on local regulatory requirements	<b>Hard Drive</b>	250 GB 5400 rpm SMART SATA II
	<b>Upgrade Bay</b>	DVD+/-RW SuperMulti DL LightScribe Drive
	<b>Display</b>	14.1-inch diagonal WXGA anti-glare
	<b>Graphics</b>	Mobile Intel GMA 4500MHD
	<b>Webcam</b>	2 MP Webcam
	<b>Audio</b>	ADI High Definition CODEC Stereo headphone/line out and microphone in Integrated microphone
	<b>Communications</b>	Integrated Intel Gigabit Network Connection (10/100/1000 NIC) 56K V.92 modem
	<b>Integrated Wireless</b>	Intel WiFi Link 5300 (802.11 a/b/g/n draft 2.0)
	<b>Integrated Security</b>	Drive Encryption for HP ProtectTools HP Fingerprint Sensor TPM 1.2*
	<b>Pointing Device</b>	Dual pointing devices (Touchpad and Pointstick)
<b>Battery</b>	6-cell (55 WHr) Li-Ion	
<b>Power</b>	External 90W adapter	
<b>Warranty</b>	3/3/0 or 3/3/3 depending on country	

\* TPM module disabled where use is restricted by law; for example, Russia and China.

### Standard Features

<p><b>6930p</b> FL492AW#xxx Global SKU (see exceptions below)</p> <p>FL493AW#xxx (for Latin America, Australia, New Zealand)</p> <p><b>NOTE:</b> Components may vary based on local regulatory requirements</p>	<b>Processor</b>	Intel Core 2 Duo Processor P8600 (2.40 GHz, 3 MB L2 cache, 1066 MHz FSB)
	<b>Intel Centrino 2 with vPro technology</b>	Enabled
	<b>Operating System</b>	Genuine Windows Vista Business 32 with Office Ready
	<b>System Memory</b>	2048 MB 800 MHz DDR2 (1 DIMM)
	<b>Hard Drive</b>	160 GB 5400 rpm SMART SATA II
	<b>Upgrade Bay</b>	DVD+/-RW SuperMulti DL LightScribe Drive
	<b>Display</b>	14.1-inch diagonal WXGA anti-glare
	<b>Graphics</b>	ATI Mobility Radeon HD 3450 with 128 MB
	<b>Webcam</b>	No
	<b>Audio</b>	ADI High Definition CODEC Stereo headphone/line out and microphone in Integrated microphone
	<b>Communications</b>	Integrated Intel Gigabit Network Connection (10/100/1000 NIC) 56K V.92 modem
	<b>Integrated Wireless</b>	Intel WiFi Link 5300 (802.11 a/b/g/n draft 2.0)
	<b>Integrated Security</b>	Drive Encryption for HP ProtectTools HP Fingerprint Sensor TPM 1.2*
	<b>Pointing Device</b>	Dual pointing devices (Touchpad and Pointstick)
<b>Battery</b>	6-cell (55 WHr) Li-Ion	
<b>Power</b>	External 90W adapter	
<b>Warranty</b>	3/3/0 or 3/3/3 depending on country	

\* TPM module disabled where use is restricted by law; for example, Russia and China.

<p><b>6930p</b> FL494AW#xxx Global SKU (see exceptions below)</p> <p>FL495AW#xxx (for Latin America, Australia, New Zealand)</p> <p><b>NOTE:</b> Components may vary based on local regulatory requirements</p>	<b>Processor</b>	Intel Core 2 Duo Processor T9400 (2.53 GHz, 6 MB L2 cache, 1066 MHz FSB)
	<b>Intel Centrino 2 with vPro technology</b>	Enabled
	<b>Operating System</b>	Genuine Windows Vista Business 32 with Office Ready
	<b>System Memory</b>	2048 MB 800 MHz DDR2 (1 DIMM)
	<b>Hard Drive</b>	160 GB 7200 rpm SMART SATA II
	<b>Upgrade Bay</b>	DVD+/-RW SuperMulti DL LightScribe Drive
	<b>Display</b>	14.1-inch diagonal WXGA anti-glare
	<b>Graphics</b>	ATI Mobility Radeon HD 3450 with 256 MB
	<b>Webcam</b>	2 MP Webcam
	<b>Audio</b>	ADI High Definition CODEC Stereo headphone/line out and microphone in Integrated microphone
	<b>Communications</b>	Integrated Intel Gigabit Network Connection (10/100/1000 NIC) 56K V.92 modem
<b>Integrated Wireless</b>	Intel WiFi Link 5300 (802.11 a/b/g/n draft 2.0)	

### Standard Features

<b>Integrated Security</b>	Drive Encryption for HP ProtectTools HP Fingerprint Sensor TPM 1.2*
<b>Pointing Device</b>	Dual pointing devices (Touchpad and Pointstick)
<b>Battery</b>	6-cell (55 WHr) Li-Ion
<b>Power</b>	External 90W adapter
<b>Warranty</b>	3/3/0 or 3/3/3 depending on country

\* TPM module disabled where use is restricted by law; for example, Russia and China.

<b>6930p</b> NU836AW#xxx Global SKU (see exceptions below)	<b>Processor</b>	Intel Core 2 Duo Processor T9550 (2.66 GHz, 6 MB L2 cache, 1066 MHz FSB)
NU837AW#xxx (for Latin America, Australia, New Zealand, Singapore)	<b>Intel Centrino 2 with vPro technology</b>	Enabled
<b>NOTE:</b> Components may vary based on local regulatory requirements	<b>Operating System</b>	Genuine Windows Vista Business 32 with Office Ready
	<b>System Memory</b>	4096 MB 800 MHz DDR2 (2 DIMM)
	<b>Hard Drive</b>	250 GB 7200 rpm SMART SATA Hard Drive
	<b>Upgrade Bay</b>	DVD+/-RW SuperMulti DL LightScribe Drive
	<b>Display</b>	14.1-inch diagonal WXGA+ anti-glare
	<b>Graphics</b>	ATI Mobility Radeon HD 3450 with 256 MB
	<b>Webcam</b>	2 MP Webcam
	<b>Audio</b>	ADI High Definition CODEC Stereo headphone/line out and microphone in Integrated microphone
	<b>Communications</b>	Integrated Intel Gigabit Network Connection (10/100/1000 NIC) 56K V.92 modem
	<b>Integrated Wireless</b>	Intel WiFi Link 5300 (802.11 a/b/g/n draft 2.0)
	<b>Integrated Security</b>	Drive Encryption for HP ProtectTools HP Fingerprint Sensor TPM 1.2*
	<b>Pointing Device</b>	Dual pointing devices (Touchpad and Pointstick)
	<b>Battery</b>	6-cell (55 WHr) Li-Ion
	<b>Power</b>	External 90W adapter
	<b>Warranty</b>	3/3/0 or 3/3/3 depending on country

\* TPM module disabled where use is restricted by law; for example, Russia and China.

### Options

<b>Memory</b>	HP 1 GB (DDR2 800 MHz) SODIMM	KT292AA
	HP 2 GB (DDR2 800 MHz) SODIMM	KT293AA
	HP 4 GB (DDR2 800 MHz) SODIMM	KT294AA
<b>Storage</b>	HP Notebooks USB Diskette Drive	DC361B
	HP Primary SATA 250 GB 5400 rpm Hard Drive	AK072AA
	HP Upgrade Bay SATA 250 GB 5400 rpm Hard Drive	AK868AA
	HP Upgrade Bay SATA DVD+/-RW SuperMulti DL LightScribe Drive	AK869AA
<b>MultiBay II Storage</b> (9.5-mm) <b>NOTE:</b> Requires HP Advanced Docking Station or HP External MultiBay II	HP MultiBay II DVD-ROM Drive	PA849A
	HP MultiBay II DVD+/-RW SuperMulti DL Drive	PA851A
<b>Expansion Solutions</b>	HP 2008 Basic Docking Station	KP080AA#xxx
	HP 2008 Basic Workstation Docking Station	KQ751AA#xxx
	HP 2008 Advanced Docking Station	KP081AA#xxx
	HP 2008 Advanced Workstation Docking Station	KQ752AA#xxx
	HP Mobile port Replicator	AK155AA
	HP External MultiBay II Cradle	PA509A#xxx
	HP Standard Monitor Stand	PA507A
	HP Adjustable Notebook Stand	PA508A
<b>Communications</b>	HP un2400 EVDO/HSUPA Mobile Broadband Module	FN556AA
<b>Power</b>	HP 1-Bay Battery Charging Station	RW635AA#xxx
	HP 90W Smart AC Adapter	ED495AA#xxx
	Primary 6-cell Battery pack	KU531AA
	HP Extended Life Battery	AJ359AA
	HP 12-cell Ultra-Capacity Battery	EJ092AA

### Options

<b>Carrying Cases</b>	HP Basic Carrying Case	AJ078AA
	HP Value Nylon Case	RR314AA
	HP Universal Nylon Case	RR315AA
	HP Executive Leather Case	RR316AA
	HP Deluxe Nylon Backpack	RR317AA
	HP Deluxe Roller Case	GD405AA
<hr/>		
<b>Security</b>	HP ExpressCard Smart Card Reader with Java Card	AJ451AA
	HP/Kensington MicroSaver Security Lock	PC766A
	HP Privacy Filter	AJ357AA
<hr/>		
<b>Input/Output Devices</b>	HP USB/PS2 Optical 2-Button Scroll Mouse	DC369A
	HP USB Optical Travel Mouse	RH304AA
	HP USB Standard Keyboard	DT528A

### Memory

800-MHz DDR2 SDRAM  
Two DIMM slots supporting dual channel memory  
DIMM sizes supported: 1024 MB, 2048 MB, and 4096 MB

- Standard Memory**
- 1024 MB (1024 MB x 1)
  - 2048 MB (2048 MB x 1 or 1024 MB x 2)
  - 4096 MB (4096 MB x 1 or 2048 MB x 2)
  - 8192 MB (4096 MB x 2)

**Optional Memory Upgrades** Support for up to 8192 MB of memory with the installation of optional DDR2 SDRAM memory kits. Both memory slots are user accessible. Please refer to the Hardware and Software Guide for installation procedures. Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

Up to	Slot 1	Slot 2
1024 MB	1024 MB	Empty
2048 MB	1024 MB	1024 MB
3072 MB	2048 MB	1024 MB
4096 MB	2048 MB	2048 MB
8192 MB	4096 MB	4096 MB

**NOTE:** This chart does not represent all possible memory configurations. Due to the non-industry standard nature of some third-party memory modules, we strongly recommend using only HP branded memory modules to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed. Availability of 4 GB or more of memory requires Windows Vista Business 64-bit or Linux. With Windows 32-bit operating systems, memory above 3 GB may not all be available due to system resource requirements.

<b>Memory Upgrades</b>	HP 1 GB (DDR2 800 MHz) SODIMM	KT292AA
	HP 2 GB (DDR2 800 MHz) SODIMM	KT293AA
	HP 4 GB (DDR2 800 MHz) SODIMM	KT294AA

### Storage

#### Upgrade Bay Drive Support

---

	Quantity Supported	Drive Bay
Blu-ray R/RE DVD+/-RW SuperMulti DL Drive	One	Upgrade Bay
DVD+/-RW SuperMulti DL LightScribe Drive	One	Upgrade Bay
DVD-ROM Drive	One	Upgrade Bay
250 GB 5400 rpm SMART SATA Hard Drive	One	Upgrade Bay

---

#### Internal Storage Device

---

	Quantity Supported	Drive Bay
<b>Hard Drives</b>		
250 GB 5400 rpm SMART SATA II Hard Drive	One	Dedicated hard drive bay
160 GB 5400 rpm SMART SATA II Hard Drive	One	Dedicated hard drive bay
120 GB 5400 rpm SMART SATA II Hard Drive	One	Dedicated hard drive bay
250 GB 7200 rpm SMART SATA II Hard Drive	One	Dedicated hard drive bay
160 GB 7200 rpm SMART SATA II Hard Drive	One	Dedicated hard drive bay
<b>Solid State Drive</b>		
80 GB Solid State Drive	One	Dedicated hard drive bay

### Technical Specifications

<b>System Unit</b>	<b>Dimensions (HxWxD)</b>	1.23 in (at front) x 13.03 in x 9.57 in 31.3 mm (at front) x 331.0 mm x 243.0 mm
	<b>Weight</b>	with Upgrade Bay weight-saver and 4-cell battery Starting at 4.7 lb (2.1 kg) with Upgrade Bay optical drive and 6-cell battery Starting at 5.1 lb (2.3 kg)
<b>NOTE:</b> Height varies depending upon where on the notebook the measurement is made. Starting weight includes integrated graphics, hard drive, one memory DIMM, 802.11 wireless communications module. Weight varies by configuration and components.		
<b>Stand-Alone Power Requirements (AC Power)</b>	Nominal Operating Voltage	18.5 V
	Average Operating Power	20.0 W (integrated graphics) 23.0 W (discrete graphics)
	Max Operating Power	< 90 W
<b>Temperature*</b>	Operating	32° to 95° F (0° to 35° C) (not writing optical) 41° to 95° F (5° to 35° C) (writing optical)
	Non-operating	-4° to 140° F (-20° to 60° C)
<b>Relative Humidity*</b>	Operating	10% to 90%, non-condensing
	Non-operating	5% to 95%, 101.6° F (38.7° C) maximum wet bulb temperature
<b>Shock</b>	Operating	125 G, 2 ms, half-sine
	Non-operating	200 G, 2 ms, half-sine
<b>Random Vibration*</b>	Operating	0.75 grms
	Non-operating	1.50 grms
<b>Altitude* (unpressurized)</b>	Operating	-50 to 10,000 ft (-15.24 to 3,048 m)
	Non-operating	-50 to 40,000 ft (-15.24 to 12,192 m)
<b>* These ranges represent the recommended operating conditions. Although this notebook meets the military standard MIL-STD 810F for vibration, dust, humidity, altitude, and high temperature, HP does not guarantee future performance under those extreme conditions.</b>		
<b>Industry Standard Certifications</b>	UL	Yes
	CSA	Yes
	FCC Compliance	Yes
	ENERGY STAR®	Yes*
	EPEAT	Gold**
	ICES	Yes
	GS	Yes
	Australia / NZ A-Tick Compliance	Yes
	CCC	Yes
	Japan VCCI Compliance	Yes
	MIC	Yes
	BSMI	Yes
	CE Marking Compliance	Yes

### Technical Specifications

BNCI or BELUS	Yes
CIT	Yes
GOST	Yes
Saudi Arabian Compliance (ICCP)	Yes
SABS	Yes
UKRSERTCOMPUTER	Yes

\* Configurations of the HP EliteBook 6930p that are ENERGY STAR qualified are identified as HP EliteBook 6930p ENERGY STAR on HP websites and on [www.energystar.gov](http://www.energystar.gov).

\*\* EPEAT registration varies by country. See [www.epeat.net](http://www.epeat.net) for registration status by country. EPEAT status listed above applies to U.S.

**NOTE:** For accessibility information on HP products, please visit: <http://www.hp.com/accessibility>.

<b>HP 90W Smart AC Adapter</b>	<b>Dimensions</b>	5.00 x 1.97 x 1.1 in (12.7 x 5.0 x 2.9 cm)		
	<b>Weight</b>	0.82 lb (370 g)		
	<b>Input</b>	100 to 240 VAC		
		Input Efficiency	83% min at 115 VAC	
		Input frequency range	47 to 63 Hz	
		Input AC current	1.5 A at 90 VAC, 0.75 A at 180 VAC PFC Version 2.4 A at 90 VAC, 1.2 A at 180 VAC NON PFC Version	
	<b>Output</b>	Output power 65W	90W	
		DC output	19.0V	
		Hold-up time	5 msec at 115 VAC input	
		Output current limit	<11A, Over voltage protection- 29V max automatic shutdown	
	<b>Connector</b>	3 pin/grounded, mates with interchangeable cords		
	<b>Environmental Design</b>	Operating temperature	32° to 104° F (0° to 40° C)	
		Non-operating (storage) temperature	-4° to 149° F (-20° to 65° C)	
		Altitude	0 to 10,000 ft (0 to 3,048 m)	
		Humidity	20% to 80%	
	Storage Humidity	10% to 90%		
<b>EMI and Safety Certifications</b>	CE Mark – full compliance with LVD and EMC directives; Worldwide safety standards – IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals – C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE; MTBF– over 200,000 hours at 25°C ambient condition.			

### Technical Specifications

<b>Optional HP Ultra-Capacity Battery</b>	<b>Dimensions (H x W x L)</b>	1.3 x 6.0 x 10.6 in (3.33 x 15.25 x 26.88 cm)		
	<b>Weight</b>	1.77 lb (0.803 kg)		
	<b>Cells/Type</b>	12-cell Li-Ion		
	<b>Energy</b>	Watt-hour Capacity	95 WHr	
	<b>Temperature</b>	Operating (Charging)	32° to 113° F (0° to 45° C)	
		Operating (Discharging)	14° to 140° F (–10° to 60° C)	
		Non-operating	–4° to 140° F (–20° to 60° C)	
	<b>Battery Re-Charge Time</b>	Smart Adapter	3 to 4 hours	
		System ON	4 to 5 hours (depending on system power consumption)	
	<b>Fuel Gauge</b>	When pressed, LEDs light indicating level of charge remaining on battery		

<b>Optional HP Extended Life Battery</b>	<b>Dimensions (H x W x L)</b>	1.0 x 3.9 x 8.7 in (2.5 x 10.0 x 22.0 cm)		
	<b>Weight</b>	1.00 lb (0.455 kg)		
	<b>Cells/Type</b>	8-cell Li-Ion		
	<b>Energy</b>	Watt-hour Capacity	52 WHr	
	<b>Temperature</b>	Operating (Charging)	32° to 113° F (0° to 45° C)	
		Operating (Discharging)	14° to 140° F (–10° to 60° C)	
		Non-operating	–4° to 140° F (–20° to 60° C)	
	<b>Battery Re-Charge Time</b>	System in OFF mode or Standby	3 hours	
		System ON	3 to 5 hours (depending on system power consumption)	
		HP Fast Charge Technology	Charges the battery up to 90% within 90 minutes when system is OFF	
<b>Fuel Gauge</b>	When pressed, LEDs light indicating level of charge remaining on battery			

<b>6-Cell (55 WHr) Li-Ion battery</b>	<b>Dimensions (H x W x L)</b>	0.8 x 2.1 x 8.0 in (2.0 x 5.3 x 20.3 cm)		
	<b>Weight</b>	0.737 lb (0.335 kg)		
	<b>Cells/Type</b>	6-cell Li-Ion		
	<b>Energy</b>	Watt-hour Capacity	55 WHr	
	<b>Temperature</b>	Operating (Charging)	32° to 113° F (0° to 45° C)	
		Operating (Discharging)	14° to 140° F (–10° to 60° C)	
		Non-operating	–4° to 140° F (–20° to 60° C)	
	<b>Battery Re-Charge Time</b>	System in OFF mode or Standby	2.5 hours	
		System ON	3 to 5 hours (depending on system power consumption)	
		HP Fast Charge Technology	Charges the battery up to 90% within 90 minutes when system is OFF	

### Technical Specifications

---

<b>4-Cell (37 WHr) Li-Ion battery</b>	<b>Dimensions (H x W x L)</b>	0.8 x 2.1 x 8.0 in (2.0 x 5.3 x 20.3 cm)	
	<b>Weight</b>	0.55 lb (0.249 kg)	
	<b>Cells/Type</b>	4-cell Li-Ion	
	<b>Energy</b>	Watt-hour Capacity	37 WHr
	<b>Temperature</b>	Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 140° F (-10° to 60° C)
		Non-operating	-4° to 140° F (-20° to 60° C)
	<b>Battery Re-Charge Time</b>	System in OFF mode or Standby	2.5 hours
		System ON	3 to 5 hours (depending on system power consumption)
		HP Fast Charge Technology Charges the battery up to 90% within 90 minutes when system is OFF	

---

### Displays

---

<b>14.1-inch Illumi-Lite WXGA anti-glare</b>	<b>Active Area (W x H)</b>	11.9 x 7.5 in (30.3 x 19.0 cm)	
	<b>Diagonal Size</b>	14.1 in (35.7 cm)	
	<b>Surface Treatment</b>	Anti-glare	
	<b>Contrast Ratio</b>	400:1 (typical)	
	<b>Refresh Rate</b>	60 Hz	
	<b>Brightness</b>	200 nit (typical)	
	<b>Pixel Resolution</b>	<b>Pitch</b>	0.237 mm
		<b>Format</b>	1280 x 800
		<b>Configuration</b>	RGB Stripe
	<b>Backlight</b>	LED	
	<b>PPI</b>	107	
	<b>Viewing Angle</b>	±30° Horizontal, ±10° Vertical (minimum) 30/30/20/10 (Left/Right/Down/Up) (minimum) or 45/45/35/25 (Left/Right/Down/Up) (typical)	

---

### Technical Specifications

<b>14.1-inch WXGA anti-glare</b>	<b>Active Area (W x H)</b>	11.9 x 7.5 in (30.3 x 19.0 cm)	
	<b>Diagonal Size</b>	14.1 in (35.7 cm)	
	<b>Surface Treatment</b>	Anti-glare	
	<b>Contrast Ratio</b>	300:1 (typical)	
	<b>Refresh Rate</b>	60 Hz	
	<b>Brightness</b>	200 nit (typical)	
	<b>Pixel Resolution</b>	<b>Pitch</b>	0.237 mm
		<b>Format</b>	1280 x 800
		<b>Configuration</b>	RGB Stripe
	<b>Backlight</b>	CCFL	
	<b>PPI</b>	107	
	<b>Viewing Angle</b>	±30° Horizontal, ±10° Vertical (minimum) 30/30/20/10 (Left/Right/Down/Up) (minimum) or 45/45/35/25 (Left/Right/Down/Up) (typical)	

---

<b>14.1-inch WXGA+ anti-glare</b>	<b>Active Area (W x H)</b>	11.9 x 7.5 in (30.3 x 19.0 cm)	
	<b>Diagonal Size</b>	14.1 in (35.7 cm)	
	<b>Surface Treatment</b>	Anti-glare	
	<b>Contrast Ratio</b>	300:1 (typical)	
	<b>Refresh Rate</b>	60 Hz	
	<b>Brightness</b>	200 nit (typical)	
	<b>Pixel Resolution</b>	<b>Pitch</b>	0.210 mm
		<b>Format</b>	1440 x 900
		<b>Configuration</b>	RGB Stripe
	<b>Backlight</b>	CCFL	
	<b>PPI</b>	121	
	<b>Viewing Angle</b>	±30° Horizontal, ±10° Vertical (minimum) 30/30/20/10 (Left/Right/Down/Up) (minimum) or 45/45/35/25 (Left/Right/Down/Up) (typical)	

---

### Hard Drives

---

### Technical Specifications

<b>250 GB 7200 rpm SATA Hard Drive</b>	<b>Drive Weight</b>	0.25 lb (115 g)	
	<b>Capacity</b>	250 GB	
	<b>Height</b>	0.37 in (9.5 mm)	
	<b>Width</b>	2.75 in (70 mm)	
	<b>Interface</b>	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	<b>Transfer Rate</b>	<b>Synchronous</b> (maximum) 100 MB/s (Drive Capability)	
	<b>Seek Time</b> (typical reads, including settling)	<b>Single Track</b>	1 ms
		<b>Average</b>	10 ms
		<b>Maximum</b>	18 ms
	<b>Rotational Speed</b>	7200 rpm	
	<b>Logical Blocks</b>	488,397,168	
	<b>Operating Temperature</b>	32° to 140° F (0° to 60° C) [case temp]	
	<b>Features</b>	ATA Security	

---

<b>160 GB 7200 rpm SATA Hard Drive</b>	<b>Drive Weight</b>	0.25 lb (115 g)	
	<b>Capacity</b>	160 GB	
	<b>Height</b>	0.37 in (9.5 mm)	
	<b>Width</b>	2.75 in (70 mm)	
	<b>Interface</b>	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	<b>Transfer Rate</b>	<b>Synchronous</b> (maximum) 100 MB/s (Drive Capability)	
	<b>Seek Time</b> (typical reads, including settling)	<b>Single Track</b>	1.5 ms
		<b>Average</b>	11 ms
		<b>Maximum</b>	22 ms
	<b>Rotational Speed</b>	7200 rpm	
	<b>Logical Blocks</b>	312,581,808	
	<b>Operating Temperature</b>	32° to 140° F (0° to 60° C) [case temp]	
	<b>Features</b>	ATA Security	

---

### Technical Specifications

#### 250 GB 5400 rpm SATA Hard Drive

<b>Drive Weight</b>	0.22 lb (101 g)
<b>Capacity</b>	250 GB
<b>Height</b>	0.37 in (9.5 mm)
<b>Width</b>	2.75 in (70 mm)
<b>Interface</b>	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ
<b>Transfer Rate</b>	<b>Synchronous</b> (maximum) 100 MB/s (Drive Capability)
<b>Seek Time</b> (typical reads, including settling)	<b>Single Track</b> 3 ms
	<b>Average</b> 13 ms
	<b>Maximum</b> 24 ms
<b>Rotational Speed</b>	5400 rpm
<b>Logical Blocks</b>	488,397,168
<b>Operating Temperature</b>	32° to 140° F (0° to 60° C) [case temp]
<b>Features</b>	ATA Security

#### 160 GB 5400 rpm SATA Hard Drive

<b>Drive Weight</b>	0.22 lb (101 g)
<b>Capacity</b>	160 GB
<b>Height</b>	0.37 in (9.5 mm)
<b>Width</b>	2.75 in (70 mm)
<b>Interface</b>	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ
<b>Transfer Rate</b>	<b>Synchronous</b> (maximum) 100 MB/s (Drive Capability)
<b>Seek Time</b> (typical reads, including settling)	<b>Single Track</b> 3 ms
	<b>Average</b> 13 ms
	<b>Maximum</b> 24 ms
<b>Rotational Speed</b>	5400 rpm
<b>Logical Blocks</b>	312,581,808
<b>Operating Temperature</b>	32° to 140° F (0° to 60° C) [case temp]
<b>Features</b>	ATA Security

### Technical Specifications

<b>120 GB 5400 rpm SATA Hard Drive</b>	<b>Drive Weight</b>	0.22 lb (101 g)	
	<b>Capacity</b>	120 GB	
	<b>Height</b>	0.37 in (9.5 mm)	
	<b>Width</b>	2.75 in (70 mm)	
	<b>Interface</b>	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	<b>Transfer Rate</b>	<b>Synchronous (maximum)</b>	100 MB/s (Drive Capability)
	<b>Seek Time</b> (typical reads, including settling)	<b>Single Track</b>	3 ms
		<b>Average</b>	13 ms
		<b>Maximum</b>	24 ms
	<b>Rotational Speed</b>	5400 rpm	
	<b>Logical Blocks</b>	234,441,648	
	<b>Operating Temperature</b>	32° to 140° F (0° to 60° C) [case temp]	
<b>Features</b>	ATA Security		

<b>80 GB 2.5-inch SATA Solid State Drive</b>	<b>Weight</b>	0.19 lbs (86 g)	
	<b>Capacity</b>	80 GB	
	<b>Height</b>	0.37 in (9.5 mm)	
	<b>Width</b>	2.75 in (70 mm)	
	<b>Interface</b>	ATA-7 / SATA 2.6	
	<b>Performance</b>	<b>Maximum Sequential Read</b>	250 MB/s
		<b>Maximum Sequential Write</b>	70 MB/s
	<b>Logical Blocks</b>	156,301,488	
	<b>Operating Temperature</b>	32° to 158°F (0° to 70°C) [case temp]	
<b>Features</b>	ATA Security		

### Removable Storage Drives

### Technical Specifications

<b>DVD-ROM Drive</b>	<b>Access Times</b>	Random	<116 ms CD (typical) <125 ms DVD (typical)
	<b>Max Data Transfer Rate</b>	24X CD-ROM 8X-DVD	Up to 3,600 KB/s Up to 10,800 KB/s
	<b>Transfer Mode</b>	UDMA Mode 5	
	<b>Interface</b>	Gen 1 SATA	
	<b>Supported Media (read)</b>	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM	
	<b>Supported Media (write)</b>	None	
	<b>Max Media Capacity (read)</b>	4.7 GB	
	<b>Transport</b>	Tray Loading	

<b>DVD+/-RW SuperMulti DL LightScribe Drive</b>	<b>Access Times</b>	Random	<175 ms CD (typical) <230 ms DVD (typical)
	<b>Max Data Transfer Rate</b>	24X CD-ROM 8X DVD 24X CD-R 16X CD-RW 8X DVD+R 4X DVD+RW 8X DVD-R 4X DVD-RW 2.4X DVD+R(9) 5X DVD-RAM	Up to 3,600 KB/s Up to 10,800 KB/s Up to 3,600 KB/s Up to 2,400 KB/s Up to 10,800 KB/s Up to 5,400 KB/s Up to 10,800 KB/s Up to 5,400 KB/s Up to 2,700 KB/s Up to 6,750 KB/s
	<b>Transfer Mode</b>	UDMA Mode 5	
	<b>Interface</b>	Gen 1 SATA	
	<b>Supported Media (read)</b>	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM	
	<b>Supported Media (write)</b>	CD-R, CD-RW, DVD+R, DVD+RW, DVD-R, DVD-RW, DVD-RAM, LightScribe	
	<b>Max Media Capacity (read)</b>	8.5 GB	
	<b>Max Media Capacity (write)</b>	8.5 GB	
	<b>Transport</b>	Tray Loading	

### Technical Specifications

<b>Blu-ray R/RE DVD+/-RW SuperMulti DL Drive</b>	<b>Access Times</b>	Random	<140 ms CD-ROM (typical) <160 ms DVD-ROM (typical) <300 ms BD-ROM (typical)
	<b>Max Data Transfer Rate</b>	24X CD-ROM	Up to 3,600 KB/s
		8X DVD-ROM	Up to 10,800 KB/s
		8X CD-R	Up to 1,200 KB/s
		8X CD-RW	Up to 1,200 KB/s
		8X DVD+R	Up to 10,800 KB/s
		4X DVD+RW	Up to 5,400 KB/s
		8X DVD-R	Up to 10,800 KB/s
		4X DVD-RW	Up to 5,400 KB/s
		2.4X DVD+R(9)	Up to 2,700 KB/s
		5X DVD-RAM	Up to 6,750 KB/s
	1X BD-ROM	Up to 4,500 KB/s	
	1X BD-R	Up to 4,500 KB/s	
1X BD-RE	Up to 4,500 KB/s		
<b>Transfer Mode</b>	UDMA Mode 5		
<b>Interface</b>	Gen 1 SATA		
<b>Supported Media (read)</b>	CD-DA, CD+(E)G, CD-MIDI, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM, BD-ROM, BD-R, BD-RE		
<b>Supported Media (write)</b>	CD-R, CD-RW, DVD+R, DVD+R(9), DVD+RW, DVD-R, DVD-R(9), DVD-RW, DVD-RAM, BD-R, BD-RE		
<b>Max Media Capacity (read)</b>	50.0 GB		
<b>Max Media Capacity (write)</b>	50.0 GB		
<b>Transport</b>	Tray Loading		

### Security

### Technical Specifications

<b>HP Fingerprint Sensor</b>	<b>Mobile Voltage Operation</b>	3.0V–3.6V Single Supply
	<b>Operating Temperature</b>	32° – 158°F (0° – 70°C)
	<b>Current Consumption @ 3.3V</b>	Less than 70 mA peak imaging and scrolling Less than 25 mA hardware finger detection Advanced Power Management
	<b>High-Rate Image Capture</b>	Up to 240 image frames /sec
	<b>ESD Resistance</b>	IEC 61000-4-2 Level 4 (±15KV)
	<b>Detection Matrix</b>	192 x 16 Pixels 9.7 mm x 0.81 mm 500 ppi High-Resolution Images

### Audio

<b>Hardware</b>	<b>Implementation</b>	ADI1981HD High Definition CODEC
	<b>Touch-Sensitive Volume Controls</b>	Volume up, volume down, and mute
	<b>Full Duplex</b>	Yes
	<b>Microphone In</b>	Stereo
	<b>Headphone/Line Out</b>	Stereo
	<b>Integrated Microphone</b>	Yes, dual-microphone array

<b>Audio Output Quality</b>	<b>Frequency Response</b>	20 Hz – 20 kHz
	<b>Signal to Noise Ratio</b>	>85 dB
	<b>Total Harmonic Distortion</b>	0.01%
	<b>Noise Floor</b>	-110 dB
	<b>Play/Record Sampling Rate(s)</b>	8 kHz – 48kHz
	<b>DAC</b>	16, 20 or 24-bit
	<b>ADC</b>	16 or 20-bit

### Communications

### Technical Specifications

<p><b>Integrated Intel Gigabit Network Connection</b> (10/100/1000 NIC)</p> <p>82567LM</p>	<p><b>Ethernet Features</b></p> <p>10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14) 100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30) 1000 Mbit/s operation (1000BASE-T; IEEE 802.3z and 802.3ab; IEEE 802.3 clauses 34-42) Auto-Negotiation (Automatic Speed Selection) Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s IEEE 802.1p QoS (Quality of Service) Support IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable)</p> <p><b>Power Management</b></p> <p>ACPI compliant -- multiple power modes Situation-sensitive features reduce power consumption</p> <p><b>Performance Features</b></p> <p>TCP/IP/UDP Checksum Offload (configurable)</p> <p><b>Manageability</b></p> <p>Wake-on-LAN from standby and hibernation (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only) PXE 2.1 Remote Boot Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30)) Comprehensive diagnostic and configuration software suite Intel Advanced Management Technology (iAMT)</p> <p><b>Interface</b></p> <p>PCI Express x1</p> <p><b>NIC Device Driver Name</b></p> <p>Intel 82567 Gigabit Network Connection</p>
--	---

<p><b>V.92 56K Data/Fax Modem Form Factor</b></p> <p><b>Power Management Support</b></p> <p><b>Approvals/Certifications</b></p> <p><b>Data Mode Capabilities</b></p>	<p>MDC 1.5 Daughtercard</p> <p>APM Revision 1.2, ACPI</p> <p>UL, CSA, NEMKO, CCIB, Industry Canada, FCC Part 68, CTR21, FCC Part 15 Class B, Canadian ICES-003 Class B, C.I.S.P.R.22, Australian ACA, CE Mark, Other Countries</p> <p>V.92 data V.8bis V.80 V44, V.42bis, MNP5 (Compression) V.42 (LAPM, MNP2-4) (Error Correction)</p> <p><b>Optional symbol rates:</b> 2800, 3429 Asymmetric Symbol rates</p> <p><b>Synchronous primary channel data signaling rates:</b> 3600, 31200 Automatic rate re-negotiation V.34 V.32bis V.32 V.23 V.22bis V.22 V.21</p>
--	--

### Technical Specifications

	Bell 212A Bell 103J
<b>Fax Mode Capabilities</b>	TIA/EIA-578-B (Class 1) T.30, T.4 (Group 3) V.17 V.29 V.27ter V.21 Channel 2
<b>Command Set</b>	V.250 (Partial) TIA-602 Identification: +GMI, +GMM, +GMR Port control: +IPR, +ICF, +IFC, +ILRR Modulation: +MS, +MR, +MA Error control: +ES, +ER, +EB, +ESR, +ETBM Data compression: +DS, +DR V.251

#### HP un2400 EV-DO/HSPA Mobile Broadband Module

<b>Technology/Operating Bands</b>	GSM/GPRS/EDGE: 850MHz(Cell), 900MHz(EGSM), 1800MHz(DCS), 1900MHz (PCS) UMTS/WCDMA with receive diversity: 2100MHz (UTRA FDD Band I), 1900MHz (UTRA FDD Band II), 850MHz (UTRA FDD Band V) 1xEVDO/1xRTT with receive diversity: 850MHz (Band Class0-Cell), 1900MHz (Band Class1-PCS)
<b>Wireless Protocol Standards</b>	GSM/GPRS/EDGE: Class B, Multi-slot operation, coding schemes CS1 – CS4 and MSC1 – MSC9. UMTS/WCDMA: Release 99 and Release 5 CDMA: 1xEVDO Release 0 and Release A, IS-95A, IS-95B, IS-2000
<b>Wireless Parametric Standards</b>	Meets or exceeds TIA/EIA IS-98-D
<b>Maximum Data Rates</b>	UMTS (HSPA) – 7.2 Mbps (Download), 2.0Mbps (Upload) CDMA (EVDO Release A) – 3.1 Mbps (Download), 1.8Mbps (Upload)
<b>Maximum Output Power</b>	GSM/GPRS/EDGE: 32dBm (+/-1) WCDMA: 24dBm (+/-1) CDMA: 24dBm (+/-1)
<b>Maximum Power Consumption</b>	2500mA (peak); 1000mA (average)
<b>Power Consumption, Sleep Mode</b>	5 mA
<b>Power Management</b>	USB selective suspend Integrated notebook wireless button
<b>Antenna Type</b>	Dual high efficiency 5 band antennae with spatial diversity, mounted in the display enclosure
<b>Form Factor</b>	PCI-Express MiniCard
<b>Weight</b>	11.5 g
<b>Dimensions</b> (Length x Width x Thickness)	2.01 x 1.18 x 0.18 in (51 x 30 x 4.5 mm)

### Technical Specifications

<b>Voltage, Operating</b>	3.3v +/- 10%
<b>Temperature, Operating</b> (from TIA/EIA/IS-98-D)	-22° to 140° F (-30° to 60° C) (full RF performance) -22° to 167° F (-30° to 75° C) (reduced RF performance)
<b>Temperature, Non-operating, 96 hours</b> (from MIL-STD 202 Method 108)	-40° to 185° F (-40° to 85° C)
<b>Humidity, Non-operating</b>	85% relative humidity for 48 hours @ 185° F (85° C) (non-condensing)
<b>Configuration Utilities</b>	HP Connection Manager
<b>LED Activity</b>	LED Off – Radio Off; Solid LED On – Radio On

<b>Intel WiFi Link 5300</b>	<b>Wireless LAN Standards</b>	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n draft 2.0*
		* The specifications for 802.11n draft 2.0 are draft specifications and are not final. If the final specifications differ from the draft specifications, it may affect the ability of the notebook to communicate with other 802.11n WLAN devices. In countries where n draft 2.0 is not allowed, this capability is not enabled.
	<b>Interoperability</b>	Wi-Fi certified (802.11abg only) Cisco Compatible Extensions Program compliant (802.11abg only) with Microsoft Windows Vista and XP (details at: <a href="http://www.hp.com/go/notebooks/WLAN">http://www.hp.com/go/notebooks/WLAN</a> ) Tested with wireless access points from several major manufacturers (details at: <a href="http://www.hp.com/go/notebooks/WLAN/draft-n">http://www.hp.com/go/notebooks/WLAN/draft-n</a> )
	<b>Frequency Band</b>	2.4 GHz and 5 GHz
	<b>Antenna Structure</b>	3 transmit; 3 receive (3x3)
	<b>Data Rates</b>	802.11b: 1, 2, 5.5, 11 Mbps 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n (draft): 66 possible data rates, ranging from 6 Mbps to 450 Mbps, depending on the combination of Bandwidth, Modulation Coding Scheme, and Guard Interval used, as defined in IEEE 802.11n (draft) specification
	<b>Modulation</b>	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM
	<b>Security<sup>1</sup></b>	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES (support for key sizes of 128, 192, and 256 bits), 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST.  Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.
	<b>Sub-channels</b>	Multinational support with frequency bands and channels compliant to local regulations.
	<b>Media Access Protocol</b>	CSMA/CA (Collision Avoidance) with ACK



### Technical Specifications

4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).
5. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.

<b>Intel WiFi Link 5100</b>	<b>Wireless LAN Standards</b>	<p>IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n draft 2.0*</p> <p>* The specifications for 802.11n draft 2.0 are draft specifications and are not final. If the final specifications differ from the draft specifications, it may affect the ability of the notebook to communicate with other 802.11n WLAN devices. In countries where n draft 2.0 is not allowed, this capability is not enabled.</p>
	<b>Interoperability</b>	<p>Wi-Fi certified (802.11abg only) Cisco Compatible Extensions Program compliant (802.11abg only) with Microsoft Windows Vista and XP (details at: <a href="http://www.hp.com/go/notebooks/WLAN">http://www.hp.com/go/notebooks/WLAN</a>) Tested with wireless access points from several major manufacturers (details at: <a href="http://www.hp.com/go/notebooks/WLAN/draft-n">http://www.hp.com/go/notebooks/WLAN/draft-n</a>)</p>
	<b>Frequency Band</b>	2.4 GHz and 5 GHz
	<b>Antenna Structure</b>	1 transmit; 2 receive (1x2)
	<b>Data Rates</b>	<p>802.11b: 1, 2, 5.5, 11 Mbps 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n (draft): 66 possible data rates, ranging from 6 Mbps to 300 Mbps, depending on the combination of Bandwidth, Modulation Coding Scheme, and Guard Interval used, as defined in IEEE 802.11n (draft) specification</p>
	<b>Modulation</b>	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM
	<b>Security<sup>1</sup></b>	<p>Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES (support for key sizes of 128, 192, and 256 bits), 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST.</p> <p>Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.</p>
	<b>Sub-channels</b>	Multinational support with frequency bands and channels compliant to local regulations.
	<b>Media Access Protocol</b>	CSMA/CA (Collision Avoidance) with ACK
	<b>Network Architecture Models</b>	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
	<b>Roaming</b>	IEEE 802.11 compliant roaming between access points
	<b>Output Power (for CCK)<sup>2</sup></b>	15 dBm

### Technical Specifications

<b>Output Power</b> (for OFDM; power varies by data rate) <sup>2</sup>	15 dBm
<b>Power Consumption</b>	Transmit: 2.3 Watts (average, with one spatial streams) Receive: 1.9 Watts (average with two receive chains) Idle mode <sup>3</sup> : 30 mW (average) Radio off: 20 mW (max)
<b>Power Management</b>	ACPI compliant power management 802.11 compliant power saving mode
<b>Receiver Sensitivity</b> <sup>4</sup>	300 Mbps: -68 dBm, 54 Mbps: -74 dBm, 6 Mbps: -90 dBm
<b>Antenna Connections</b>	3 U.FL type connectors, 50 ohm nominal impedance
<b>Range</b>	802.11 a – Typical (@6 Mbps)      600 feet – Outdoor Open Area 150 feet – Indoor, Office environment 802.11 b – Typical (@1 Mbps)      1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment 802.11 g – Typical (@1 Mbps)      1200 feet – Outdoor Open Area 300 feet – Indoor, Office environment
<b>Form Factor</b>	PCI-Express MiniCard
<b>Weight</b>	0.013 lb (6 g)
<b>Dimensions</b>	0.19 x 1.2 x 2.0 in (4.75 x 29.85 x 50.8 mm)
<b>Operating Voltage</b>	3.3V +/- 9%, 1.5V +/- 5%
<b>Temperature</b>	Operating      32° to 176° F (0° to 80° C) Non-operating      -40° to 176° F (-40° to 80° C)
<b>Humidity</b>	Operating      10% to 90% (non-condensing) Non-operating      5% to 90% (non-condensing)
<b>Altitude</b>	Operating      0 to 10,000 ft (3,048 m) Non-operating      0 to 50,000 ft (15,240 m)
<b>Configuration Utility</b> <sup>5</sup>	Microsoft Windows XP Choice of Configuration Utility: <ul style="list-style-type: none"><li>● Microsoft Windows XP Wireless Network Connection Manager</li><li>● Intel PROSet for Microsoft Windows XP (required for Cisco Compatible Extensions support)</li></ul> Microsoft Windows Vista <ul style="list-style-type: none"><li>● Microsoft Windows Vista Wireless Network Connection Manager.</li><li>● Intel IHV extensions for Windows Vista available to support Cisco Compatible Extensions.</li></ul>
<b>LED Activity</b>	LED Off – Radio OFF; Solid LED On – Radio ON

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. In Power Save Polling mode and on battery power.
4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).
5. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows



### Technical Specifications

<b>Weight</b>	0.026 lb (12 g)	
<b>Dimensions</b>	0.19 x 1.2 x 2.0 in (4.75 x 29.85 x 50.8 mm)	
<b>Operating Voltage</b>	3.3v +/- 10%	
<b>Temperature</b>	Operating	14° to 149° F (–10° to 65° C)
	Non-operating	–40° to 176° F (–40° to 80° C)
<b>Humidity</b>	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
<b>Altitude</b>	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
<b>Configuration Utility<sup>4</sup></b>	Microsoft Windows XP Choice of Configuration Utility:	
	<ul style="list-style-type: none"> <li>• Microsoft Windows XP Wireless Network Connection Manager</li> <li>• Broadcom Wireless Configuration Utility (required for Cisco Compatible Extensions support)</li> </ul>	
	Microsoft Windows Vista	
	<ul style="list-style-type: none"> <li>• Microsoft Windows Vista Wireless Network Connection Manager</li> <li>• Broadcom IHV extensions for Windows Vista available to support Cisco Compatible Extensions.</li> </ul>	
<b>LED Activity</b>	LED Off – Radio OFF; Solid LED On – Radio ON	
	<ol style="list-style-type: none"> <li>1. Check latest software/driver release for updates on supported security features.</li> <li>2. Maximum output power may vary by country according to local regulations.</li> <li>3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).</li> <li>4. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.</li> </ol>	

### HP Integrated Module with Bluetooth Wireless Technology

<b>Bluetooth Specification</b>	2.0 Compliant
<b>Dimensions</b>	1.02 x 0.55 x 0.22 in (26 x 14 x 5.7 mm)
<b>Frequency Band</b>	2402 to 2480 MHz
<b>Number of Available Channels</b>	79 (1 MHz) available channels
<b>Data Rates and Throughput</b>	3 Mbps data rate; throughput up to 2.17 Mbps Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric
<b>Transmit Power</b>	–6 dBm to 4 dBm (Bluetooth Class II)
<b>Receiver Sensitivity</b>	Better than –80 dBm at 0.1 % raw bit error rate
<b>Power Consumption</b>	Peak (Tx) 264 mW
	Peak (Rx) 231 mW
	Sleep <1 mW

### Technical Specifications

<b>Antenna</b>	Internally integrated within module	
<b>Range</b>	Up 33 ft (10 m)	
<b>Electrical Interface</b>	USB 2.0 compliant	
<b>OS Support</b>	Microsoft Windows Plug and Play compliant Microsoft Windows XP Professional and Home Microsoft Windows 2000	
<b>Bluetooth Software Supported</b>	Broadcom Bluetooth for Windows Microsoft Windows XP Bluetooth Software	
<b>Link Topology</b>	Point to Point, Multipoint Pico Nets up to 7 slaves	
<b>Security</b>	Full support of Bluetooth Security Provisions	
<b>Power Management</b>	Microsoft Windows ACPI, and USB Bus Support Self configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff	
<b>Certifications</b>	All necessary regulatory approvals for supported countries, including: FCC (47 CFR) Part 15C, Section 15.247 & 15.249 ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark	
<b>Temperature</b>	Operating	-4° to 158° F (-20° to 70° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
<b>Humidity</b>	Operating	10% to 90%
	Non-operating	5% to 95%
<b>Altitude</b>	Operating	15,000 ft (4,572 m)
	Non-operating	40,000 ft (12,192 m)
<b>Bluetooth Profiles Supported</b>	(with Bluetooth for Windows 4.0 software) Serial Port Profile (SPP)* Dial-Up Networking (DUN)* Generic Object Exchange Profile (GOEP) Object Push Profile (OPP)* File Transfer Profile (FTP) Synchronization Profile (SYNC) Hard Copy Cable Replacement (HCRP)* Personal Area Networking Profile (PAN)* Human Interface Device Profile (HID)* FAX Profile (FAX) Basic Imaging Profile (BIP) Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP)	

\* indicates the profile is also supported by Microsoft Windows XP SP2

### Technical Specifications

#### Eco Data

#### Eco-Label Certifications

This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- US Energy Star
- Taiwan Green Mark
- China Energy Conservation Program
- IT ECO declaration
- EPEAT – Gold with Illumi-Lite LED display
- EPEAT – Silver without Illumi-Lite LED display

#### System Configuration

The configuration used for the Energy Consumption and Declared Noise Emissions data for the Convertible Mini tower Desktop model is based on a "Typically Configured Notebook"

#### Energy Consumption

**115 VAC**

**230 VAC**

**100 VAC**

Normal Operation

10.614 W

11.826 W

10.792 W

Sleep (Energy Star low power mode)

1.8621 W

1.9193 W

1.8764 W

Off

0.8042 W

0.8435 W

0.8106 W

#### Heat Dissipation\*

**115 VAC**

**230 VAC**

**100 VAC**

Normal Operation

36 BTU/hr

40 BTU/hr

36 BTU/hr

Sleep

6 BTU/hr

6 BTU/hr

6 BTU/hr

Off

3 BTU/hr

3 BTU/hr

3 BTU/hr

\* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

This product is in compliance with US executive order 13221, WOL (wake on LAN) disabled.

#### Declared Noise Emissions

(in accordance with ISO 7779 and ISO 9296)

	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Idle	3.3	25
Operation	3.3	26

#### Batteries

This product complies with ISO standards:

- EU Directive 91/ 157/ EEC
- EU Directive 93/ 86/ EEC
- EU Directive 98/ 101/ EEC

Batteries used in the product do not contain:

- Mercury greater than 5ppm by weight
- Cadmium greater than 10ppm by weight
- Lead greater than 4000 ppm by weight.

The battery type and chemistry used in the product is:

### Technical Specifications

#### Additional information:

Battery type – CR2032 (coin cell)

Battery Chemistry – Lithium, Li Ion

This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive – 2002/95/EC.

This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive – 2002/96/EC.

This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).

This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold level when configured with Illumi-lite LED Display, see: [www.epeat.net](http://www.epeat.net)

This product is in compliance with the IEEE 1680 (EPEAT) standard at the Silver level when configured with CCFL Display, see: [www.epeat.net](http://www.epeat.net)

Keyboard complies with ISO standard: ISO 9995, EN 29241-4, and ISO/IEC 15412

Input devices of this product comply with ISO 9241, part 9.

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

This product contains 0% recycled materials (by wt.)

This product is greater than 95.4% recycle-able when properly disposed of at end of life.

#### Packaging Materials

- External:
  - Corrugated Carton – 182 g
- Internal:
  - EPE-Expanded Polyethylene – 33 g
  - Corrugated Carton – 488 g
- The EPE foam packaging material is made from 100% recycled content.
- The corrugated paper packaging materials contains at least 80% recycled content.

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and

### Technical Specifications

#### Material Usage

corrugated materials.

- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

This product does not contain any of the following substances in excess of regulatory limits (for reference of these limits please refer to the HP General Specification of the Environment

([http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen\\_specifications.html](http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html)):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel – finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBEBs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

#### End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

#### Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment:

Global Citizenship Report  
<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

### Technical Specifications

Environment website

<http://www.hp.com/environment>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

---

Copyright © 2010 Hewlett-Packard Development Company, L.P.

All rights reserved. Microsoft, Windows, Windows Vista and Windows XP are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Core 2 Duo, Centrino 2 and vPro are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a registered trademark of Bluetooth SIG, Inc., in the U.S. and other countries. All other product names mentioned herein may be trademarks of their respective companies.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.