

[Reolink Support](#) > [FAQs](#) > [Introduction](#) >

Search...



# Reolink RLA-BKC1 Corner Mounting Bracket: Installation Guide and Compatibility

The Reolink RLA-BKC1 corner mounting bracket allows easy placement of cameras in corners, providing optimal angles and simple installation in tight spaces. This guide includes installation instructions and a compatibility list for your Reolink camera.

## Table of Contents

[1. Overview of Reolink RLA-BKC1](#)[2. Reolink RLA-BKC1 Compatibility List](#)[3. Step-by-Step Installation Instructions](#)

## 1. Overview of Reolink RLA-BKC1

The Reolink RLA-BKC1 bracket offers enhanced installation flexibility by enabling corner mounting, providing better coverage in corners that would otherwise be difficult to access. Its durable construction ensures reliable performance for both indoor and outdoor use.

- **Enhanced Installation Flexibility:** Generally, cameras are installed on flat walls or accessible surfaces. The RLA-BKC1 solves this by enabling corner mounting, offering a 90-degree angle for better coverage in tight spaces or areas where flat surfaces and other mounting options aren't available.
- **Increased Surveillance Coverage:** Corner mounting often provides a wider field of view for more comprehensive coverage. The RLA-BKC1 lets you utilize unused corner spaces, capturing more area with a single camera.



- **Durable Construction:** Built from high-quality materials, this bracket withstands various environmental conditions, making it a great choice for indoor and outdoor installations.



## 2. Reolink RLA-BKC1 Compatibility List

The RLA-BKC1 corner mount bracket works seamlessly with a wide range of Reolink cameras. To check if it's compatible with your Reolink camera, refer to the list of supported Reolink camera models.

If your camera is not listed, you may check its compatibility with the [RLA-BKC2 Mount Bracket](#) instead.

### Mounting Hole

Pattern-A


Reolink Duo 2  
(Battery)

### Compatible Cameras

Reolink Duo 2 LTE Reolink Duo 2 PoE

Reolink Duo 3  
PoE

	Reolink Duo 2	Reolink Go		
	WiFi	Ranger PT		
	E1 Outdoor PoE	E1 Outdoor SE PoE	E1 Outdoor	E1 Outdoor S
Pattern-B	E1 Outdoor Pro	E1 Outdoor CX	Argus PT	Argus PT Lite
	Argus PT Ultra	Reolink Go PT Plus	Reolink Go PT Ultra	
	RLC-510A	RLC-510WA	RLC-810A	RLC-810WA
Pattern-C	RLC-81MA	RLC-1212A	CX410	CX410W
	CX810	Argus Eco	Reolink Go Ultra	Reolink Go Plus
Pattern-D	RLC-811A	RLC-811WA		
Pattern-E	Argus Eco Pro	Argus Eco Ultra	Argus 4	Argus 4 Pro

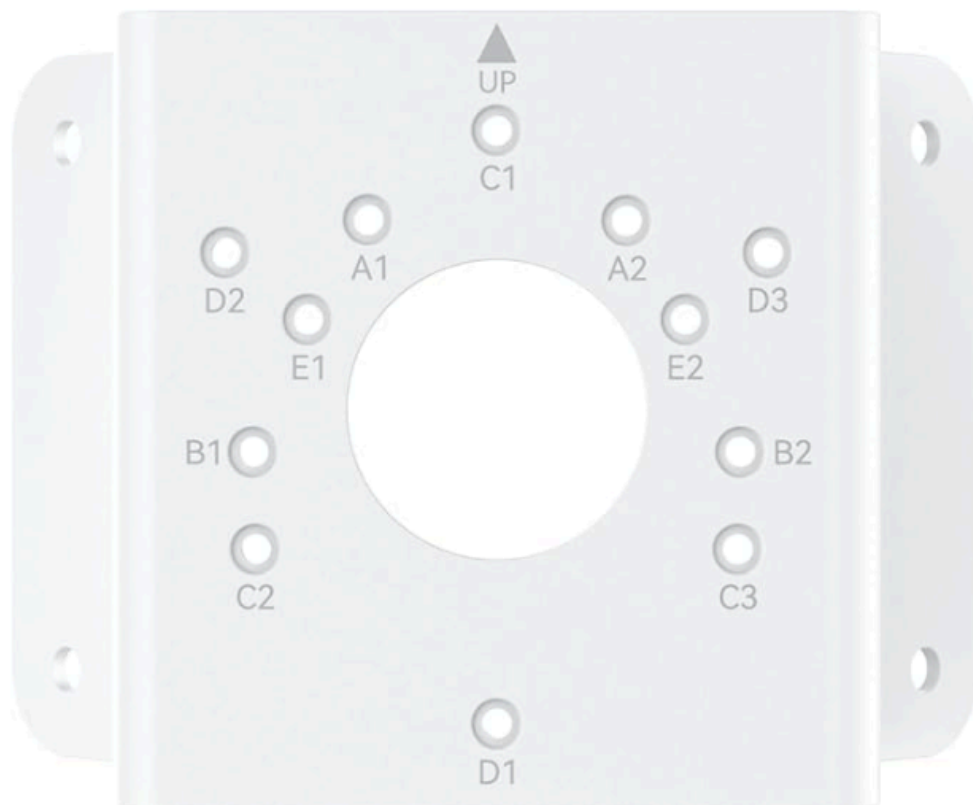

### 3. How to Install a Reolink Security Camera Corner Mount

The Reolink RLA-BKC1 corner mounting bracket is easy to install. Follow the steps below to ensure optimal results:

#### What You'll Need



- RLA-BKC1 corner mounting bracket
- A compatible Reolink camera
- Drill and drill bits (not included)
- Screws and wall anchors (provided with the bracket)
- Screwdriver (not included)

## Installation Steps

### 1. Choose the Right Corner


Select the wall corner for camera installation, ensuring the wall can support the combined weight of the bracket and camera.

### 2. Mark and Drill Holes

Hold the bracket against the corner, mark the drilling spots with a pencil, and drill holes. For better stability, especially on softer surfaces like drywall, use the included wall anchors.

### 3. Attach the Bracket


Align the bracket with the drilled holes and insert the screws. Screw tight with a screwdriver to secure the bracket firmly in place.

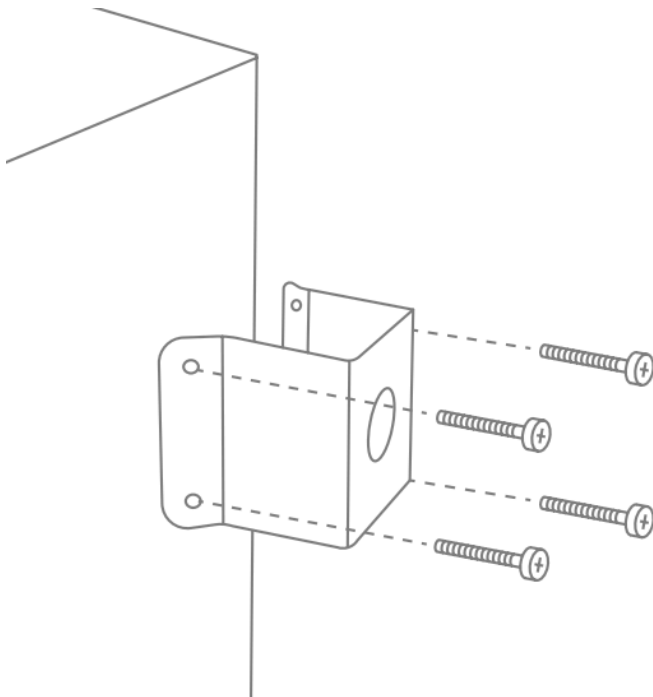


### 4. Mount the Camera

If the camera has a tail cable, thread it through the pre-drilled hole.



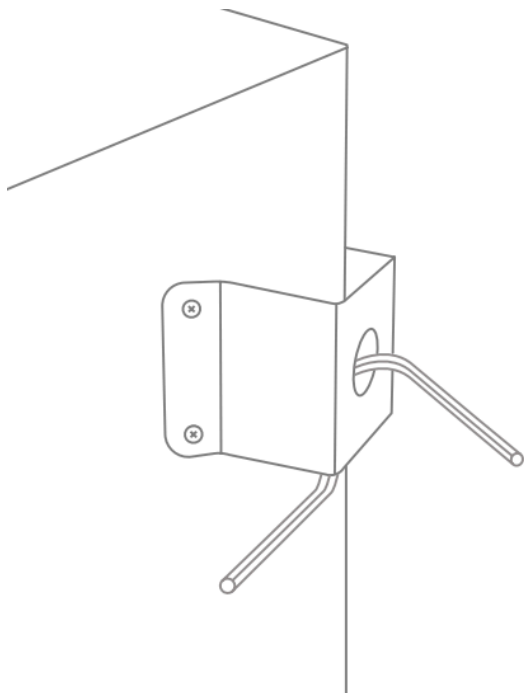

Then, firmly screw the camera onto the bracket.

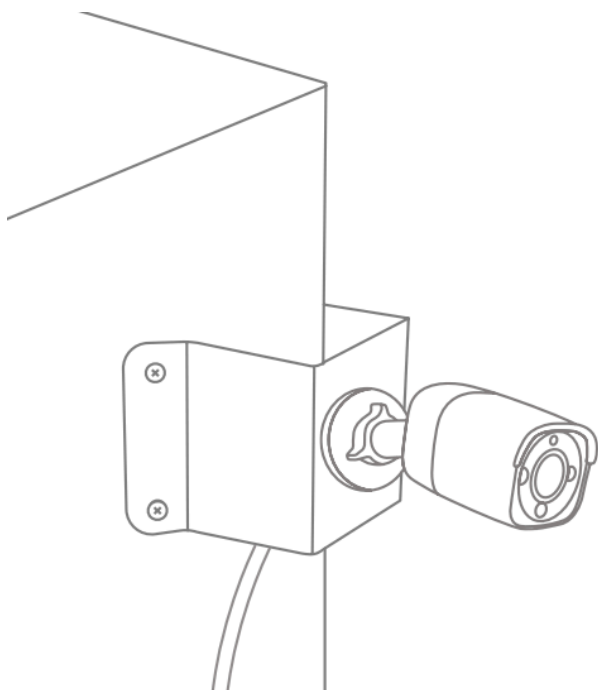


Done! Adjust the camera's angle for the best coverage.

## Differences in Installation for Different Reolink Camera Models (Pattern A/B/E)

For different Reolink camera models, the mounting requirements may vary slightly. Understanding these differences ensures secure and optimal setup. Below, we outline the key distinctions across different Reolink camera models.

### Duo Series

## 1. Install the camera bracket first:

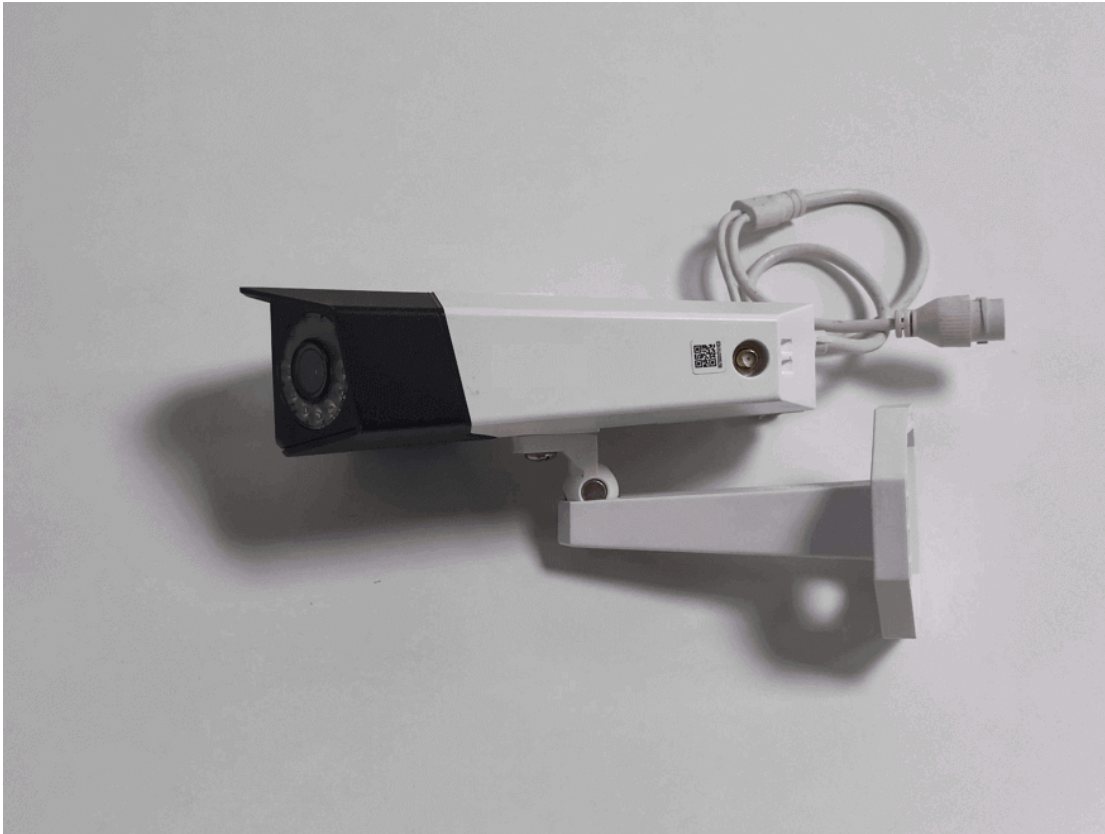

## 2. Secure the mounting plate:

Align the camera's mounting plate with Pattern A and fasten it with screws in the side-by-side screw holes.





### 3. Mount the camera:

Insert the protruding part of the mounting plate into the groove at the bottom of the camera bracket, then secure the camera to the mounting plate with screws.







---

E1 Outdoor Series, Argus PT Series, and Go PT Series



---

Go Ranger PT





# Argus Eco Series and Argus 4 Series



With easy installation and a durable design, the RLA-BKC1 keeps your camera secure and optimally positioned for the best surveillance angles. Whether installing in tight spaces or optimizing property coverage, this corner mount is ideal for all your needs.

For any questions or further assistance with the RLA-BKC1 Corner Mount Bracket, please contact [Reolink Support](#).

Have more questions? [Submit a request](#)



Helpful?

Yes

No

PRODUCTS



SUPPORT



COMPANY



PROGRAMS



Copyright © 2025 Reolink. All Rights Reserved.

