


Overview

HP ProBook 4535s Notebook PC

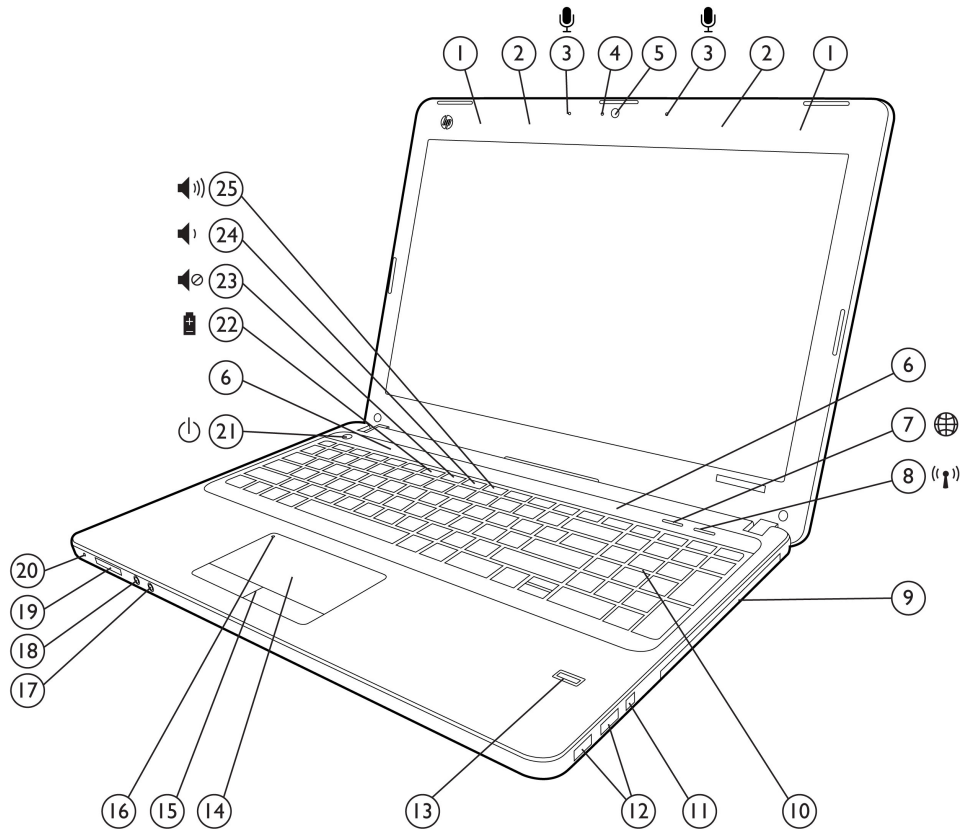


- | | |
|--|---|
| 1. WWAN antennas (select models) | 14. Touchpad |
| 2. WLAN antennas | 15. Touchpad pick buttons |
| 3. Dual-microphone array* | 16. Touchpad on/off button with LED indicator |
| 4. Webcam LED indicator (with optional webcam) | 17. Stereo microphone in |
| 5. 720p HD webcam | 18. Stereo headphone/line out |
| 6. Stereo speakers | 19. Media Card Reader |
| 7. HP QuickWeb button with LED indicator | 20. Hard drive activity LED indicator |
| 8. Wireless on/off button with LED indicator | 21. Power button with LED indicator |
| 9. Optical drive (select models) | 22. HP Power Assistant function key |
| 10. Numeric keypad | 23. Volume mute function key |
| 11. Optional RJ-11/modem port | 24. Volume down function key |
| 12. (2) USB 2.0 ports | 25. Volume up function key |
| 13. Optional HP Fingerprint Sensor | |


QuickSpecs

HP ProBook 4435s Notebook PC
HP ProBook 4436s Notebook PC
HP ProBook 4535s Notebook PC

Overview

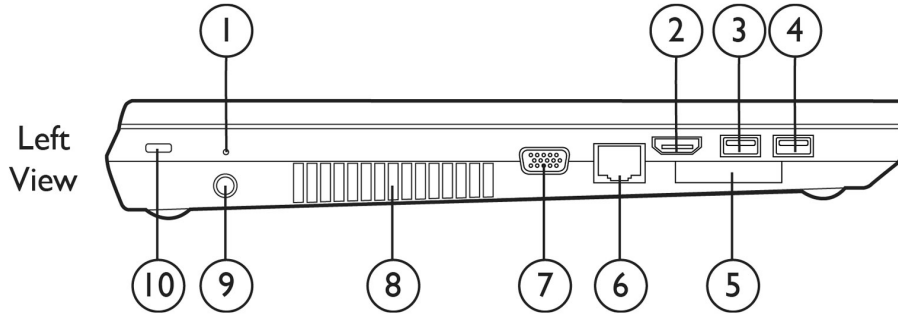

- | | |
|-----------------------------------|-----------------------------------|
| 1. Battery charging LED indicator | 6. RJ-45/Ethernet port |
| 2. HDMI 1.4a port | 7. VGA/external monitor connector |
| 3. USB 3.0 port | 8. Vent |
| 4. USB 2.0 port | 9. Power connector |
| 5. ExpressCard/34 slot | 10. Security lock slot |

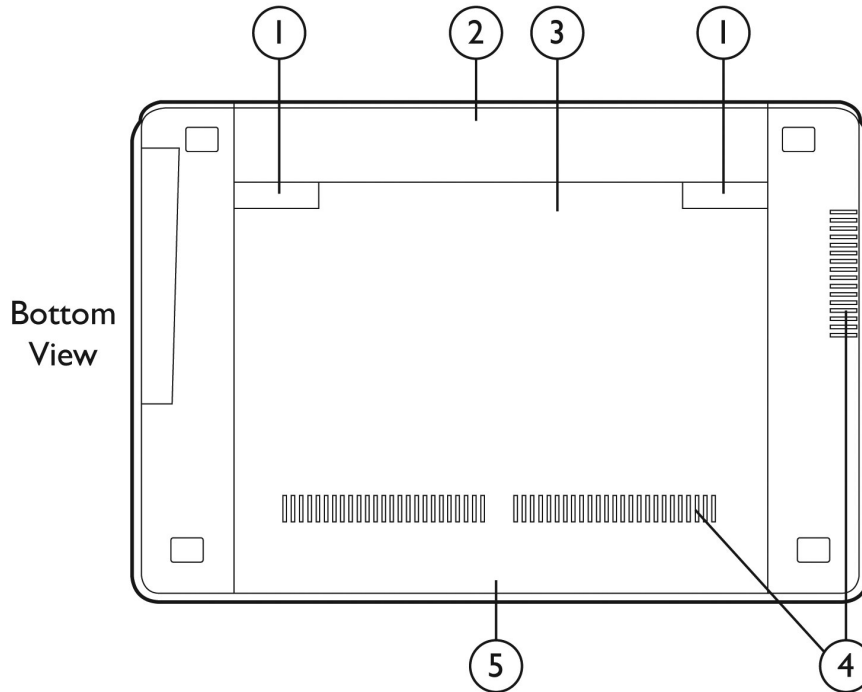

- | | |
|---|-------------------|
| 1. Battery and access cover release latches | 4. Vents |
| 2. Battery bay | 5. Hard drive bay |
| 3. SIM card slot (select units, located inside battery bay) | |

Overview

At A Glance

- Genuine Windows 7 versions, SUSE Linux
- Thin, lightweight design with metallic gray brushed aluminum finish for durability and style; wear-resistant HP DuraFinish
- Full-sized spill-resistant keyboard; full separate numeric keypad on HP ProBook 4535s
- HP 3D DriveGuard to protect hard drive against impact, bumps or drops
- Larger Touchpad with gestures support, on/off button with LED indicator
- Enhanced security features including HP ProtectTools, HP Face Recognition, optional HP Fingerprint Sensor, and optional HP Privacy Filter
- SRS Premium Sound optimized for high fidelity audio
- HDMI port for connecting to high-resolution displays
- ArcSoft TotalMedia Suite for playing, creating, and editing video and audio files
- Optional HD webcam with dual-microphone array for video conferencing
- Widescreen LED-backlit HD display with 16:9 aspect ratio
HP ProBook 4535s: 15.6-inch diagonal HD anti-glare
- Accelerated Processing Unit and graphics powered by VISION Technology from AMD
 - Models with integrated graphics (HP 4535s)
 - Models with discrete graphics (HP 4535s)
- AMD Radeon™ Dual Graphics to automatically manage how the graphics processor in the AMD APU and the AMD Radeon™ discrete graphics processor are used
- HP QuickWeb for convenient online access without the standard boot-up time
- Flexible wireless connectivity options controlled by HP Connection Manager:
 - Integrated HP Mobile Broadband Module*
 - Integrated 802.11 b/g/n wireless LAN module
 - Integrated 802.11 a/b/g/n or b/g/n with Bluetooth 3.0 High Speed (HS) combo card**
- HP DayStarter for calendar display during startup
- HP Power Assistant to conserve power, increase battery run-time, monitor power needs, report workforce power consumption
- BFR/PVC-free***, ENERGY STAR qualified and EPEAT TBD registered in the U.S. EPEAT status varies by country- please see epeat.net.

* Available only on HP ProBook 4535s with integrated graphics.

** Available on select models.

** This notebook is brominated flame retardant and polyvinyl chloride-free (BFR/PVC-free) on notebooks that are non-WWAN; meeting the evolving definition of 'BFR/PVC-free' as set forth in the "iNEMI Position Statement on the 'Definition of Low-Halogen' Electronics (BFR/CFR/PVC-Free)". Plastic parts contain < 1000 ppm (0.1%) of bromine [if the Br source is from BFRs] and < 1000 ppm (0.1%) of chlorine [if the Cl source is from CFRs or PVC or PVC copolymers]. Power supply and power cords are not BFR/PVC-free. Service parts after purchase may not be BFR/PVC-free.

Standard Features (availability may vary by country)

Accelerated Processing Unit (APU)

VISION Technology from AMD

AMD Quad-Core A6-3420M with Radeon HD 6520G Graphics
(2.4 GHz/1.5 GHz, 4 MB L2 cache, 35W)

AMD Quad-Core A6-3400M with Radeon HD 6540G2 Dual Graphics
(2.3 GHz/1.4 GHz, 4 MB L2 cache, 35W)

AMD Dual-Core A4-3320M with Radeon HD 6480G Graphics
(2.6 GHz/2.0 GHz, 2 MB L2 cache, 35W)

AMD Dual-Core A4-3305M with Radeon HD 6480G Graphics
(2.6 GHz/1.9 GHz, 2 MB L2 cache, 35W)

AMD Dual-Core A4-3300M with Radeon HD 6480G Graphics
(2.5 GHz/1.9 GHz, 2 MB L2 cache, 35W)

NOTE: APU speed denotes maximum performance mode; APUs will run at lower speeds in battery optimization mode.

Operating System

Preinstalled

Genuine Windows 7 Professional 32*
Genuine Windows 7 Professional 64*
Genuine Windows 7 Home Premium 32*
Genuine Windows 7 Home Premium 64*
Genuine Windows 7 Home Basic 32* (select countries)
Genuine Windows 7 Starter* (select countries and configurations)
SuSE Linux Enterprise Desktop 11

Supported

Genuine Vista Home Basic
Genuine Windows XP Professional 32

* System may require upgraded and/or separately purchased hardware and/or a DVD drive to install the Windows 7 software and take full advantage of Windows 7 functionality.
See: <http://www.microsoft.com/windows/windows-7/> for details.

Fusion Controller Hub (Chipset)

AMD A70M FCH

NOTE: EMEA can not use Fusion.

Standard Features (availability may vary by country)

Graphics included with Accelerated Processing Unit (APU)

Models with integrated graphics (HP 4535s):
AMD Radeon HD 6520G Graphics (with AMD Quad-Core A6-3400M APU)
AMD Radeon HD 6480G Graphics (with AMD Dual-Core A4-3300M APU)

Models with discrete graphics* (HP 4535s):
AMD Radeon™ HD 6520G + 7450M Dual Graphics with 512MB/1GB DDR3 memory (with AMD Quad-Core A6-3400M APU)
AMD Radeon™ HD 6480G + 7450M Dual Graphics with 512MB/1GB DDR3 memory (with AMD Dual-Core A4-3300M APU)
AMD Radeon™ HD 7450M with 512MB/1GB DDR3 memory (with AMD Dual-Core E2 APU)

All discrete configurations come with either 512 MB or 1 GB dedicated DDR3 video memory
Microsoft DirectX 11 (Shader Model 5.0) and OpenGL 4.0 capable

* AMD Radeon™ Dual Graphics automatically manages the graphics processor in the AMD APU and the AMD Radeon™ discrete graphics processor, and can use them both at the same time when the task demands it. The system seamlessly adjusts to a single processor to improve battery life when top performance is no longer required. It requires an AMD "A" series APU plus an AMD Radeon™ discrete graphics configuration and is available with Windows® 7 Professional, Windows Home Premium, and Windows Home Basic. Full enablement of all discrete graphics video and display features may not be supported on all systems (e.g., OpenGL applications will run on the APU).

Display

Internal

HP ProBook 4535s:
15.6-inch diagonal LED-backlit HD anti-glare (1366 x 768 resolution)

External

Optional HP Privacy Filter
Up to 32-bit per pixel color depth
VGA port supports resolutions up to 2048 x 1536 at 75 Hz, and lower resolutions at up to 100 Hz.
HDMI port supports direct connection to high-definition displays with up to 1920 x 1080 resolution and 7-channel audio with one convenient cable (not included).
NOTE: Resolutions are dependent upon monitor capability, and resolution and color depth settings.

Standard Features (availability may vary by country)

Memory	Standard	DDR3 PC3-10600 SDRAM (1333 MHz) Two SODIMM slots supporting dual-channel memory 1 GB, 2 GB, and 4 GB SODIMMs
	Maximum	Upgradeable to 8 GB with 4 GB SODIMMs in slots 1 and 2
	Dual-channel	Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

NOTE: Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed. Full availability of 4 GB or more of memory requires Windows Vista Business 64-bit or Linux. With Windows 32-bit operating systems, the amount of usable memory is dependent upon your configuration, so that above 3 GB all memory may not be available due to system resource requirements.

Communications

Realtek Ethernet (10/100/1000 NIC)*
Optional 56K V.92 modem**

* The term "10/100/1000" or "Gigabit" Ethernet indicates compatibility with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/s. For high-speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.

** Designed for downloads from 56K modem compliant sources. Maximum achievable download transmission rates currently do not reach 56 KB/s, and will vary with line conditions. Modem availability is subject to country regulatory approval.

Wireless Devices

Support for a broad range of secure, integrated wireless options featuring support for the latest industry standards.

Mobile Broadband options

Mobile Broadband (WWAN) requires a Windows operating system and is available in select countries as a factory configurable feature for the HP ProBook 4535s with integrated graphics only. Two 850/900/1575/1700/1800/1900/2100 MHz antennas integrated in the top of the display panel support current and future WWAN technologies.
NOTE: Separately purchased mobile network operator service is required.

802.11 integrated wireless LAN options

Wi-Fi certified*
Wired Equivalent Privacy (WEP) support up to 128-bit keys
Wi-Fi Protected Access (WPA) and WPA2 support
802.1x authentication support, including EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, and LEAP
Advanced Encryption Standard (AES) support
Dual antennas integrated in the display enclosure

Ralink 3592BC8 802.11 a/b/g/n 2x2 WiFi and Bluetooth 3.0+HS Combo Adapter*

Integrated support for 802.11 a, b, g, and n
Up to 300 mbps data rate
Bluetooth Specification 3.0 High Speed (HS)* and 2.1 compliant
Works with a wide range of Bluetooth devices

Atheros 9285GN 802.11 b/g/n 1x1 WiFi and 3011 Bluetooth 3.0+HS Combo Adapter*

Integrated support for 802.11 b, g, and n
Up to 150 mbps data rate
Bluetooth Specification 3.0 High Speed (HS)* and 2.1 compliant
Works with a wide range of Bluetooth devices

Standard Features (availability may vary by country)

* Bluetooth 3.0+HS support requires a Windows operating system.

Keyboard

The HP spill-resistant keyboard is designed using a thin layer of Mylar film under the keyboard and a drain system that funnels fluid through a hole in the bottom of the notebook. This minimizes the risk of damage to sensitive components underneath. The 101/102-key compatible keyboard features a full-pitch key layout with desktop keyboard features, such as editing keys, both left and right control and alt keys, and function keys. US and International key layouts are available. The HP ProBook 4535s includes a separate numeric keypad.

Launch Buttons and Function Keys

Separate launch buttons provide easy access to wireless on/off and HP QuickWeb. Function keys provide control of features including: standby mode, display brightness, external display, HP Power Assistant, volume mute, volume down, volume up, and media control.

Pointing device

Touchpad with gestures support, on/off button with LED indicator, two-way scroll, two pick buttons

Expansion card slots

ExpressCard/34 slot

Supports ExpressCard/34 (34 mm x 75 mm x 5 mm) card sizes

Media Card Reader

Supports High Speed SD 3.0 (Secure Digital), MultiMediaCard, Memory Stick, Memory Stick Pro, Memory Stick Pro Duo*, SD Micro, MultiMediaCard Micro

* Memory Stick Pro Duo Adapters are required and sold separately. Inserting a Memory Stick Pro Duo Card directly into your notebook could damage the memory card and/or notebook.

Internal Storage

Hard drives

320/500/750 GB 7200 rpm SMART SATA II
320/640 GB 5400 rpm SMART SATA II

NOTE: Up to 15 GB is reserved for the system recovery software.

HP 3D DriveGuard (Windows models only)

The hard drive is mounted directly to the notebook frame, reducing the transmission of shock to the hard drive. Uses three-axis digital motion detection with intelligent sensitivity to help protect the hard drive during normal use from shock and vibration. The digital accelerometer temporarily halts all data transfer and parks the hard drive when abrupt motion is detected.

Removable Storage

Fixed optical drives Weight saver

DVD+/-RW SuperMulti DL Drive

Standard Features (availability may vary by country)

Interfaces	VGA	One
	HDMI 1.4a	One
	Stereo microphone in	One
	Stereo headphone/line out	One
	Power connector	One
	RJ-11/modem (optional)	One
	RJ-45/Ethernet	One
	USB 3.0	One
	USB 2.0	Three

Audio/Visual

SRS Premium Sound™
Integrated stereo speakers
Integrated microphone (dual-microphone array when equipped with optional webcam)
Function keys for volume mute, volume up, volume down; play, rewind, and fast-forward of video and audio files
Stereo headphone/line out
Stereo microphone/line in

720p HD webcam

- HD format (widescreen)
- Supports videoconferencing and still image capture
- High quality fixed focus lens
- Video capture at various resolutions up to 1280x720 resolution (720p) and up to 30fps
- M-JPEG compression supports higher frame rates for video capture and videoconferencing
- Improved low light sensitivity
- Improved dynamic range

Software

Preinstalled software with Windows Operating System

- HP Recovery Manager
- HP Support Assistant
- HP ProtectTools Security Manager
- HP ProtectTools for Central Management
- HP Face Recognition
- HP Hotkey Support
- HP QuickWeb
- HP Power Assistant
- HP Connection Manager
- HP DayStarter
- Microsoft Office 2010 preloaded (purchase of a Product Key required to activate a full Office 2010 suite)*
- Norton Internet Security 2011**
- PDF Complete Special Edition***
- ArcSoft Total Media Suite
- HP Webcam Software (select models)
- Skype

Standard Features (availability may vary by country)

ArcSoft Total Media Suite

**Additional software
available from the web**

HP SoftPaq Download Manager

* Microsoft Office 2010 Preloaded includes reduced functionality versions of Word and Excel. Purchase of Product Key required to activate full Office 2010 suite available at participating resellers/retailers and <http://www.office.com>.

** Norton Internet Security 2011 includes 60 days of complimentary live updates; subscription required for live updates thereafter. Internet access required to receive updates.

*** PDF Complete Special Edition 60 day trial; purchase license afterwards for full functionality.

HP Recovery Manager

Models shipped with Windows 7 include HP Recovery Manager. HP Recovery Manager enables fast recovery of the factory preinstalled image if the system becomes corrupted or if important system files are accidentally deleted. Up to 20 GB of the hard drive is reserved for the system recovery software.

Security

Standard Features

HP ProtectTools Security Manager (standard modules include)

- Credential Manager
- Computrace* Pro
- Device Access Manager
- Drive Encryption
- Face Recognition (webcam configurations only)
- File Sanitizer
- Privacy Manager

Enhanced Pre-Boot Security

HP SpareKey

One-Step Logon

Security lock slot

Optional Features

HP Fingerprint Sensor

HP Privacy Filter

* The Computrace agent is shipped turned off, and must be activated by customers when they purchase a subscription with terms ranging from one to five years.

For more information on HP security solutions refer to: <http://www.hp.com/products/security>.

Standard Features (availability may vary by country)

HP ProtectTools Security Manager with Central Management

HP ProtectTools Security Manager is the security platform for business notebooks and desktops. The HP ProtectTools Security Manager is an extensible client security console that delivers enhanced security capabilities through add-on software modules. The ProtectTools modules are available on the hard drive (also downloadable from the web) and can be configured in Software Setup.

HP ProtectTools is centrally manageable with the capability to manage notebooks from a single point. HP ProtectTools is management ready out of the box, in partnership with Digital Persona. Features address requirements that customers expect from a centrally managed security solution such as user provisioning, credential reset, and credential revocation.

HP ProtectTools provides two separate management solutions, targeted at the enterprise and the SMB:

- **Digital Persona Pro AD:** Designed for the enterprise customer. Integrates with Active Directory and gives IT Managers the ability to provision users, create login policies based on passwords, biometrics or smartcards. Management features also include remote credential recovery in case the user forgets the password, loses the smartcard or cannot use the fingerprint reader for any reason. In addition, advanced auditing capabilities are also built in. Digital Persona Pro AD is available now.
- **Digital Persona Pro Workgroup:** Designed for the small business customer. Provides features similar to the Active Directory version, but for workgroups. Workgroup activation is built into HP ProtectTools, and activation of up to 5 seats is completely free.

For more information on Central Management for HP ProtectTools, refer to:
<http://www.hp.com/products/security>.

Power Supply

Models with integrated graphics: External 65-watt Smart AC adapter
 Models with discrete graphics: External 90-watt Smart AC adapter
 6-foot (1.8-meter) power cord included; total length including external AC adapter is 12 feet (3.66 meter)
 HP Fast Charge*

* HP Fast Charge recharges your battery up to 90% within 90 minutes when the system is off. HP Fast Charge does not apply to the HP 9-cell battery.

Battery

Primary battery

HP 9-cell (93 WHr) Li-Ion battery
 HP 6-cell (47 WHr) Li-Ion battery

Battery Life

HP ProBook 4535s

6-cell battery 47 WHr

Configurations with integrated graphics

Up to 6 hours

Configurations with discrete graphics

Up to 5 hours and 15 Minutes

NOTE: Battery life will vary depending on the product model, configuration, loaded applications, features, use, wireless functionality and power management settings. The maximum capacity of the battery will naturally decrease with time and usage. See MobileMark07 battery benchmark www.bapco.com/products/mobilemark2007 for additional details.

System Standby Time

Up to 1 week

Standard Features (availability may vary by country)

Power Conservation

Supports enhanced Intel SpeedStep technology (allows Battery Optimized Mode, Maximum Performance Mode, or Automatic mode)

ATI PowerPlay technology

Hibernation

Standby

ACPI compliance

Service and Support

HP Services offers limited 1-year warranty depending on country; 1-year limited warranty on primary battery. Warranty upgrades are also available. HP Care Pack Services extend service contracts beyond the standard warranties. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: <http://www.hp.com/go/lookuptool>. Additional HP Care Pack Services information by product is available at: <http://www.hp.com/hps/carepack>.

NOTE: Certain restrictions and exclusions apply. Consult the HP Customer Support Center for details. <http://h20000.www2.hp.com/bizsupport/TechSupport/ProductRoot.jsp>

QuickSpecs

HP ProBook 4435s Notebook PC
HP ProBook 4436s Notebook PC
HP ProBook 4535s Notebook PC

Options (availability may vary by country)

NOTE: Options/capabilities listed in the QuickSpecs represent those capabilities available through Base Units or Build to Order configurations. The various product features and capabilities will vary in terms of configurable vs. aftermarket options (AMOs). There may be options and capabilities available through CTO that are not available as AMOs.

Memory	HP 1 GB (DDR3 1333 MHz) SODIMM	AT911AA#xxx
	HP 2 GB (DDR3 1333 MHz) SODIMM	AT912AA#xxx
	HP 4 GB (DDR3 1333 MHz) SODIMM	AT913AA#xxx
	HP 2 GB PC3-12800 (DDR3 1600 MHz) SODIMM	H2P63AA
	HP 4 GB PC3-12800 (DDR3 1600 MHz) SODIMM	H2P64AA

NOTE: Full availability of 4 GB or more of memory requires Windows Vista Business 64-bit or Linux. With Windows 32-bit operating systems, the amount of usable memory is dependent upon your configuration, so that above 3 GB all memory may not be available due to system resource requirements. Due to system limitations, DDR3-1600 MHz memory will only be supported at DDR3-1333 MHz.

Storage	HP 250 GB Pocket Media Drive	FE477AA
	HP Mobile USB DVD	XQ543AA
	HP Mobile USB DVDRW	BU516AA

Power	HP 90W Smart AC Adapter	ED495AA#xxx
	HP 90W Smart AC/Auto/Air Combo Adapter	AJ652AA#xxx
	HP 90W Smart Auto/Truck Adapter	ED493AA
	HP 65W Slim Adapter	AX727AA#xxx
	HP 90W Slim Adapter	BT796AA#xxx

Carrying Cases	HP Basic Carrying Case	AJ078AA
	HP Business Nylon Case	BP848AA
	HP Professional Slim Top Load Case	AY530AA

Security	HP Notebook Combo Lock	AY475AA#xxx
	HP Keyed Cable Lock	BV411AA
	HP 14.0-inch Display Privacy Filter	AU100AA#xxx
	HP 15.6-inch Display Privacy Filter	AU103AA#xxx

Input/Output Devices	HP USB Optical Travel Mouse	RH304AA
	HP USB/PS2 Optical 2-Button Scroll Mouse	DC369AA
	HP USB Keyboard & Mouse Bundle	RC465AA#xxx



Technical Specifications

System Unit	Dimensions (HxWxD)	HP ProBook 4535s: 1.13 in (at front) x 14.76 in x 10.09 in 2.87 cm (at front) x 37.50 cm x 25.62 cm
	Weight	HP ProBook 4535s: Starting at 5.14 lb (2.33 kg) without optical drive or 5.45 lb (2.47 kg) with optical drive
	NOTE: Height varies depending upon where on the notebook the measurement is made. Weight varies by configuration and components.	
	Stand-Alone Power Requirements (AC Power)	Nominal Operating Voltage 18.5 V Average Operating Power with integrated graphics: TBD W with discrete graphics: TBD W Max Operating Power < 90 W or < 65W
	Temperature	Operating* 32° to 95° F (0° to 35° C) (not writing optical) 41° to 95° F (5° to 35° C) (writing optical)
	Relative Humidity	Non-operating -4° to 140° F (-20° to 60° C) Operating 10% to 90%, non-condensing Non-operating 5% to 95%, 101.6° F (38.7° C) maximum wet bulb temperature
	Shock	Operating 125 G, 2 ms, half-sine Non-operating 200 G, 2 ms, half-sine
	Random Vibration	Operating 0.75 grms Non-operating 1.50 grms
	Altitude (unpressurized)	Operating -50 to 10,000 ft (-15.24 to 3,048 m) Non-operating -50 to 40,000 ft (-15.24 to 12,192 m)
	Planned Industry Standard Certifications	UL Yes CSA Yes FCC Compliance Yes ENERGY STAR® Select models* EPEAT Registered TBD in United States** ICES Yes Australia / NZ A-Tick Compliance Yes CCC Yes Japan VCCI Compliance Yes KCC Yes BSMI Yes CE Marking Compliance Yes

* At temperatures above 86° F (30° C), the Intel Core i3-2310M Processor may not run at maximum clock speed.

** Configurations of the HP Probook 4436s and HP ProBook 4535s that are ENERGY STAR qualified are

Technical Specifications

identified as HP ProBook 4436s ENERGY STAR and HP ProBook 4535s ENERGY STAR on HP websites and on www.energystar.gov.

*** EPEAT registration varies by country. See www.epeat.net for registration status by country. EPEAT status listed above applies to U.S.

NOTE: For accessibility information on HP products, please visit: <http://www.hp.com/accessibility>.

Audio	SRS Premium Sound	
--------------	--------------------------	--

Hardware	Implementation	IDT 92HD87 High Definition CODEC
	Touch-Sensitive Volume Controls	Volume up, volume down, and mute
	Full Duplex	Yes
	Microphone In	Stereo
	Headphone/Line Out	Stereo
	Integrated Microphone	Yes, dual digital microphone array when equipped with optional webcam

Audio Output Quality	Frequency Response	20 Hz – 20 kHz
	Signal to Noise Ratio	>85 dB
	Total Harmonic Distortion	0.01%
	Noise Floor	-110 dB
	Play/Record Sampling Rate(s)	8 kHz – 48kHz
	DAC	16, 20 or 24-bit
	ADC	16 or 20-bit

Integrated Stereo Speakers	Power Rating	2 Watts
	Impedance	4 Ohms

Power		
--------------	--	--

Technical Specifications

HP 90W Smart AC Adapter	Dimensions	5.00 x 1.97 x 1.1 in (12.7 x 5.0 x 2.9 cm)		
	Weight	0.82 lb (370 g)		
	Input	Input	100 to 240 VAC	
		Input Efficiency	87% min at 115 VAC	
		Input frequency range	47 to 63 Hz	
	Output	Input AC current	1.5 A at 90 VAC, 0.75 A at 180 VAC PFC Version 2.4 A at 90 VAC, 1.2 A at 180 VAC NON PFC Version	
		Output power	90W	
		DC output	19.0V	
		Hold-up time	5 msec at 115 VAC input	
		Output current limit	<11A, Over voltage protection- 29V max automatic shutdown	
	Connector	3 pin/grounded, mates with interchangeable cords		
	Environmental Design	Operating temperature	32° to 104° F (0° to 40° C)	
		Non-operating (storage) temperature	-4° to 149° F (-20° to 65° C)	
Altitude		0 to 10,000 ft (0 to 3,048 m)		
Humidity		20% to 80%		
EMI and Safety Certifications	Storage Humidity	10% to 90%		
	CE Mark - full compliance with LVD and EMC directives; Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE; MTBF- over 200,000 hours at 25°C ambient condition.			

HP 65W Smart AC Adapter	Dimensions	4.17 x 1.85 x 1.1 in (10.6 x 4.7 x 2.8 cm)		
	Weight	0.62 lb (280 g)		
	Input	Input	100 to 240 VAC	
		Input Efficiency	87% min at 115 VAC	
		Input frequency range	47 to 63 Hz	
	Output	Input AC current	1.7 A at 90 VAC, 0.85 A at 180 VAC	
		Output power	65W	
		DC output	18.5V	
		Hold-up time	5 msec at 115 VAC input	
		Output current limit	<11A, Over voltage protection- 29V max automatic shutdown	
	Connector	3 pin/grounded, mates with interchangeable cords		
	Environmental Design	Operating temperature	32° to 104° F (0° to 40° C)	
		Non-operating (storage) temperature	-4° to 149° F (-20° to 65° C)	
Altitude		0 to 10,000 ft (0 to 3,048 m)		
Humidity		20% to 80%		

Technical Specifications

EMI and Safety Certifications	Storage Humidity	10% to 90%
	CE Mark - full compliance with LVD and EMC directives; Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE; MTBF - over 200,000 hours at 25°C ambient condition.	

NOTE: Unless otherwise noted, temperature limits listed in the following component specifications relate to the internal temperatures of these components and not to the environment in which the PC is operating.

6-Cell (47 WHr) Lithium-Ion battery	Dimensions (H x W x L)	0.8 x 1.8 x 10.4 in (2 x 4.5 x 26.5cm)	
	Weight (max)	.70lb, (.312kg)	
	Cells/Type	Lithium-Ion	
	Energy	Voltage	10.8V
		Amp-hour capacity	4.4Ah
		Watt-hour capacity	47Wh
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 122° F (-10° to 50° C)
		Non-operating	-4° to 122° F (-20° to 50° C)
	Battery Re-Charge Time	System in OFF or Standby Mode	2.5 hours
		System ON	3 to 5 hours
Fuel Gauge LED	No		
Warranty	1 year		
Optional Travel Battery Available	No		

Displays

Technical Specifications

15.6-inch LED HD (1366 x 768) anti-glare	Dimensions (W x H)	13.54 x 7.59 in (34.4 x 19.4 cm)
	Diagonal Size	15.6 in (39.6cm)
	Surface Treatment	Anti-glare
	Contrast Ratio	400:1 (min)
	Refresh Rate	60 Hz
	Brightness	210 nit (typical)
	Pixel Resolution	Pitch 0.252 mm
		Format 1366 x 768
		Configuration RGB Stripe
	Backlight	LED
	PPI	101 ppi
Viewing Angle	±30° Horizontal, ±10° Vertical (minimum) 30/30/20/10 (Left/Right/Down/Up) (minimum) or 45/45/35/25 (Left/Right/Down/Up) (typical)	

15.6-inch LED HD (1366 x 768) BrightView	Dimensions (W x H)	13.54 x 7.59 in (34.4 x 19.4 cm)
	Diagonal Size	15.6 in (39.6cm)
	Surface Treatment	BrightView (glossy)
	Contrast Ratio	500:1 (typical)
	Refresh Rate	60 Hz
	Brightness	200 nit (typical)
	Pixel Resolution	Pitch 0.252 mm
		Format 1366 x 768
		Configuration RGB Stripe
	Backlight	LED
	PPI	101 ppi
Viewing Angle	±30° Horizontal, ±10° Vertical (minimum) 30/30/20/10 (Left/Right/Down/Up) (minimum) or 45/45/35/25 (Left/Right/Down/Up) (typical)	

Internal Storage

Technical Specifications

750 GB 7200 rpm SATA Hard Drive	Drive Weight	0.25 lbs (115g)	
	Capacity	750 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	Transfer Rate	Synchronous (maximum) 300 MB/s (Drive Capability)	
	Seek Time (typical reads, including settling)	Single Track	1.5 ms
		Average	11 ms
		Maximum	22 ms
	Rotational Speed	7200 rpm	
	Logical Blocks	1,465,149,168	
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]	
	Features	ATA Security	

500 GB 7200 rpm SATA Hard Drive	Drive Weight	0.25 lbs (115g)	
	Capacity	500 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	Transfer Rate	Synchronous (maximum) 300 MB/s (Drive Capability)	
	Seek Time (typical reads, including settling)	Single Track	1.5 ms
		Average	11 ms
		Maximum	22 ms
	Rotational Speed	7200 rpm	
	Logical Blocks	976,773,168	
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]	
	Features	ATA Security	

Technical Specifications

320 GB 7200 rpm SATA Hard Drive	Drive Weight	0.25 lbs (115 g)	
	Capacity	320 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	Transfer Rate	Synchronous (maximum) 300 MB/s (Drive Capability)	
	Seek Time (typical reads, including settling)	Single Track	1.5 ms
		Average	11 ms
		Maximum	22 ms
	Rotational Speed	7200 rpm	
	Logical Blocks	625,142,448	
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]	
	Features	ATA Security	

750 GB 5400 rpm SATA Hard Drive	Drive Weight	0.27 lb (125 g) or 0.22 lb (101 g)	
	Capacity	750 GB	
	Height	0.50 in (12.7 mm) or 0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	Transfer Rate	Synchronous (maximum) 300 MB/s (Drive Capability)	
	Seek Time (typical reads, including settling)	Single Track	3 ms
		Average	13 ms
		Maximum	24 ms
	Rotational Speed	5400 rpm	
	Logical Blocks	1,465,149,168	
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]	
	Features	ATA Security	

Technical Specifications

640 GB 5400 rpm SATA Hard Drive	Drive Weight	0.22 lb (101 g)	
	Capacity	640 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	Transfer Rate	Synchronous (maximum) 300 MB/s (Drive Capability)	
	Seek Time (typical reads, including settling)	Single Track	3 ms
		Average	13 ms
		Maximum	24 ms
	Rotational Speed	5400 rpm	
	Logical Blocks	1,250,263,728	
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]	
	Features	ATA Security	

320 GB 5400 rpm SATA Hard Drive	Drive Weight	0.22 lb (101 g)	
	Capacity	320 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	Transfer Rate	Synchronous (maximum) 300 MB/s (Drive Capability)	
	Seek Time (typical reads, including settling)	Single Track	3 ms
		Average	13ms
		Maximum	24 ms
	Rotational Speed	5400 rpm	
	Logical Blocks	625,142,448	
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]	
	Features	ATA Security	

Optical Drives

Technical Specifications

DVD-ROM Drive	Access Times	Random	< 140 ms CD (typical) < 160 ms DVD (typical)
	Max Data Transfer Rate	24X CD-ROM 8X-DVD	
	Transfer Mode	UDMA Mode 5	
	Interface	Gen 1 SATA	
	Supported Media (read)	CD-DA, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM	
	Supported Media (write)	None	
	Max Media Capacity (read)	8.5GB	
	Transport	Tray Loading	

DVD+/-RW SuperMulti DL Drive	Access Times	Random	<140ms CD (typical) < 160 ms DVD (typical)
	Max Data Transfer Rate	24X CD-ROM 8X DVD 24X CD-R 24X CD-RW 8X DVD+R 8X DVD+RW 8X DVD-R 6X DVD-RW 6X - DVD+R Dual Layer 6X - DVD-R Dual Layer 5X DVD-RAM	
	Transfer Mode	UDMA Mode 5	
	Interface	Gen 1 SATA	
	Supported Media (read)	CD-DA, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM	
	Supported Media (write)	CD-R, CD-RW, DVD+R, DVD+RW, DVD-R, DVD-RW, DVD-RAM, DVD+R DL, DVD-R DL	
	Max Media Capacity (read)	8.5 GB	
	Max Media Capacity (write)	8.5 GB	
	Transport	Tray Loading	

Technical Specifications

Security

HP Fingerprint Sensor (optional)	Mobile Voltage Operation	3.0V-3.6V Single Supply
	Operating Temperature	32° – 158°F (0° – 70°C)
	Current Consumption @ 3.3V	Less than 70 mA peak imaging and scrolling Less than 25 mA hardware finger detection Advanced Power Management
	High-Rate Image Capture	Up to 240 image frames /sec
	ESD Resistance	IEC 61000-4-2 Level 4 (±15KV)
	Detection Matrix	192 x 16 Pixels 9.7 mm x 0.81 mm 500 ppi High-Resolution Images

Communications

V.92 56K Data/Fax Modem Form Factor	MDC 1.5 Daughtercard
Power Management Support	APM Revision 1.2, ACPI
Approvals/Certifications	UL, CSA, NEMKO, CCIB, Industry Canada, FCC Part 68, CTR21, FCC Part 15 Class B, Canadian ICES-003 Class B, C.I.S.P.R.22, Australian ACA, CE Mark, Other Countries
Data Mode Capabilities	V.92 data V.8bis V.80 V44, V.42bis, MNP5 (Compression) V.42 (LAPM, MNP2-4) (Error Correction) Optional symbol rates: 2800, 3429 Asymmetric Symbol rates Synchronous primary channel data signaling rates: 3600, 31200 Automatic rate re-negotiation V.34 V.32bis V.32 V.23 V.22bis V.22 V.21 Bell 212A Bell 103J
Fax Mode Capabilities	TIA/EIA-578-B (Class 1) T.30, T.4 (Group 3)

Technical Specifications

	V.17
	V.29
	V.27ter
	V.21 Channel 2
	T.31
Command Set	V.250 (Partial)
	TIA-602
	Identification: +GMI, +GMM, +GMR
	Port control: +IPR, +ICF, +IFC, +ILRR
	Modulation: +MS, +MR, +MA
	Error control: +ES, +ER, +EB, +ESR, +ETBM
	Data compression: +DS, +DR
	V.251

Atheros 9285GN 802.11b/g/n + BT 3.0 HS Combo Adapter

Wireless LAN Standards	IEEE 802.11b IEEE 802.11g IEEE 802.11n
Interoperability	Wi-Fi certified
Frequency Band	2.4 GHz
Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: many possible data rates, ranging from 6 Mbps to 300 Mbps, depending on the combination of Bandwidth, Modulation Coding Scheme, and Guard Interval used, as defined in IEEE 802.11n specification
Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM
Security¹	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST.
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between access points
Output Power (for CCK and OFDM) ²	17 dBm, nominal
Output Power (for OFDM; power varies by data rate) ²	15 dBm, nominal
Power Consumption	Transmit: 1.5 W (max) Receive: 1.0 W (max) Associated to Access Point, Idle: 300 mW nominal Wireless Button Off: 75 mW nominal
Power Management	ACPI compliant power management 802.11 compliant power saving mode
Receiver Sensitivity³	54 Mbps: -75 dBm, 11 Mbps: -88 dBm, 1 Mbps: -93 dBm

Technical Specifications

Antenna type	High efficiency antenna with spatial diversity, mounted in the display enclosure	
Form Factor	PCI-Express Half-MiniCard	
Weight	0.013 lb (6 g)	
Dimensions	0.19 x 1.06 x 1.18 in (4.75 x 26.8 x 30 mm)	
Operating Voltage	3.3v +/- 9%	
Temperature	Operating	14° to 149° F (-10° to 65° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
LED Activity	LED Off - Radio OFF; Solid LED On - Radio ON	
	<ol style="list-style-type: none">1. Check latest software/driver release for updates on supported security features.2. Maximum output power may vary by country according to local regulations.3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).	

Ralink 3592BC8 802.11a/b/g/n 2x2 WiFi and Bluetooth 3.0+HS Combo Adapter

Wireless LAN Standards	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n
Interoperability	Wi-Fi certified Cisco Compatible Extensions Program compliant with Microsoft Windows Vista and XP (details at: http://www.hp.com/go/notebooks/WLAN)
Frequency Band	2.4 GHz and 5GHz
Data Rates	802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
	802.11b: 1, 2, 5.5, 11 Mbps
	802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
	802.11n: from 6 Mbps to 300 Mbps, depending on the combination of Bandwidth, Modulation Coding Scheme, and Guard Interval used, as defined in IEEE 802.11n specification
Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM
	Security¹
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK

Technical Specifications

Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between access points
Output Power (for CCK and OFDM) ²	17 dBm , nominal
Output Power (for OFDM; power varies by data rate) ²	15 dBm , nominal
Power Consumption	Idle associated: 250 mW Idle unassociated: 150 mW Transmit: 2.0 W (max) Receive: 2.0 W (max)
Power Management	ACPI compliant power management 802.11 compliant power saving mode
Receiver Sensitivity ³	54 Mbps: -71 dBm, 11 Mbps: -85 dBm , 1 Mbps: -95 dBm
Antenna type	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure
Form Factor	PCI-Express Half-MiniCard
Weight	0.013 lb (6 g)
Dimensions	0.19 x 1.06 x 1.18 in (4.75 x 26.8 x 30 mm)
Operating Voltage	3.3v +/- 10%
Temperature	Operating 14° to 149° F (-10° to 65° C) Non-operating -40° to 176° F (-40° to 80° C)
Humidity	Operating 10% to 90% (non-condensing) Non-operating 5% to 95% (non-condensing)
Altitude	Operating 0 to 10,000 ft (3,048 m) Non-operating 0 to 50,000 ft (15,240 m)
Configuration Utility ⁴	Microsoft Windows XP Choice of Configuration Utility: <ul style="list-style-type: none">● Microsoft Windows XP Wireless Network Connection Manager● Broadcom Wireless Configuration Utility (required for Cisco Compatible Extensions support) Microsoft Windows Vista <ul style="list-style-type: none">● Microsoft Windows Vista Wireless Network Connection Manager● Broadcom IHV extensions for Windows Vista available to support Cisco Compatible Extensions.
LED Activity	LED Off - Radio OFF; Solid LED On - Radio ON

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).
4. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows

Technical Specifications

Vista.

Bluetooth 2.1 and 3.0 Wireless Technology	Bluetooth Specification	2.1+EDR and 3.0+HS Compliant	
	Dimensions	1.18 x 0.26 x 0.13 in (30 x 6.5 x 3.25 mm)	
	Frequency Band	2402 to 2480 MHz	
	Number of Available Channels	79 (1 MHz) available channels	
	Data Rates and Throughput	3 Mbps data rate; throughput up to 2.17 Mbps	
		Synchronous Connection Oriented links up to 3, 64 kbps, voice channels	
		Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric	
	Transmit Power	-6 dBm to 4 dBm (Bluetooth Class II)	
	Receiver Sensitivity	Better than -80 dBm at 0.1 % raw bit error rate	
	Power Consumption	Peak (Tx) 175 mW	
		Peak (Rx) 160 mW	
		Sleep <1 mW	
	Antenna	Internally integrated within module	
	Range	Up 33 ft (10 m)	
	Electrical Interface	USB 2.0 compliant	
		Microsoft Windows Plug and Play compliant	
	Bluetooth Software Supported	Broadcom Bluetooth for Windows	
		Microsoft Windows Bluetooth Software	
	Link Topology	Point to Point, Multipoint Pico Nets up to 7 slaves	
	Security	Full support of Bluetooth Security Provisions	
	Power Management	Microsoft Windows ACPI, and USB Bus Support	
		Self configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff	
Certifications	All necessary regulatory approvals for supported countries, including:		
	FCC (47 CFR) Part 15C, Section 15.247 & 15.249		
	ETS 300 328, ETS 300 826		
	Low Voltage Directive IEC950		
	UL, CSA, and CE Mark		
Temperature	Operating	-4° to 158° F (-20° to 70° C)	
	Non-operating	-40° to 176° F (-40° to 80° C)	
Humidity	Operating	10% to 90%	
	Non-operating	5% to 95%	
Altitude	Operating	15,000 ft (4,572 m)	
	Non-operating	40,000 ft (12,192 m)	
Bluetooth Profiles Supported	Serial Port Profile (SPP) ¹		
	Service Discovery Application Profile (SDAP)		
	Dial-Up Networking (DUN) ^{1,2}		
	Generic Object Exchange Profile (GOEP) ^{1,2}		
	Object Push Profile (OPP) ^{1,2}		

Technical Specifications

- File Transfer Profile (FTP)
- Synchronization Profile (SYNC)
- Hard Copy Cable Replacement (HCRP)^{1,2}
- Personal Area Networking Profile (PAN)^{1,2}
- Human Interface Device Profile (HID)^{1,2,3}
- FAX Profile (FAX)
- Basic Imaging Profile (BIP)²
- Headset Profile (HSP)
- Hands Free Profile (HFP)
- Advanced Audio Distribution Profile (A2DP)

1. indicates the profile is supported by Microsoft Windows XP SP2
2. indicates the profile is part of Windows Vista

Environmental Data

Eco-Label Certifications

This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- US ENERGY STAR®
- IT ECO declaration
- EPEAT - Gold where HP registers commercial notebook products. See <http://www.epeat.net> for registration status in your country.

System Configuration

The configuration used for the Energy Consumption and Declared Noise Emissions data for the Convertible Mini tower Desktop model is based on a "Typically Configured Notebook"

Energy Consumption

	115 VAC	230 VAC	100 VAC
Normal Operation	7.85 W	8.11 W	7.48 W
Sleep (Energy Star low power mode)	0.89 W	1.04 W	0.92 W
Off	0.43 W	0.55 W	0.46 W

Heat Dissipation*

	115 VAC	230 VAC	100 VAC
Normal Operation	27 BTU/hr	28 BTU/hr	25 BTU/hr
Sleep	3 BTU/hr	3 BTU/hr	3 BTU/hr
Off	1 BTU/hr	2 BTU/hr	1 BTU/hr

* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)

System Fan Off	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Idle	3.4	25.4

Technical Specifications

Fixed Disk (random writes)	3.4	25.9
-------------------------------	-----	------

System fan is usually off except when charging the battery

Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater the 5ppm by weight
- Cadmium greater than 10ppm by weight

The battery type and chemistry used in the product is:
CR2032 (coin cell), Li-ion

6-cell high capacity Lithium-Ion battery (optional 8 cell available)

Additional information

This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.

This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.

This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).

This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold level, see www.epeat.net

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

This product contains 0% post consumer recycled plastic (by wt.)

This product is greater than 95.1% recycle-able when properly disposed of at end of life.

Packaging Materials

- External:
 - Corrugated 115 g
 - Corrugated carton 455 g
 - CANON bags - several layers 5 g
- Internal:
 - Polyethylene low density 15 g
 - Molded Pulp 190 g
- The Corrugated packaging material is made from 80% recycled content.
- The Corrugated carton packaging material is made from 80% recycled content.
- The CANON bags - several layers packaging material is made from 80% recycled content.
- The Polyethylene low density packaging material is made from 60% recycled content.
- The Molded Pulp packaging material is made from 60% recycled

Technical Specifications

content.

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

Material Usage

This product does not contain any of the following substances in excess of regulatory limits (for reference of these limits please refer to the HP General Specification of the Environment:

http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants - may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) - except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)
- Nickel finishes that release greater than 0.5 µgrams/cm²/week, measured according to EN 1811:1998, are not used on any product surface designed to be frequently handled or touched by users.

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to:

Technical Specifications

<http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Environment website

<http://www.hp.com/environment>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html>

Copyright © 2012 Hewlett-Packard Development Company, L.P.

All rights reserved. Microsoft, Windows, Windows 7, Windows Vista and Windows XP are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. AMD and Radeon are registered trademarks or trademarks of AMD Corporation in the U.S. and/or other countries. Bluetooth is a registered trademark of Bluetooth SIG, Inc., in the U.S. and other countries. All other product names mentioned herein may be trademarks of their respective companies.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.