




VOXICON WIRELESS VERTICAL
MOUSE DM-M618PWL B




Package content

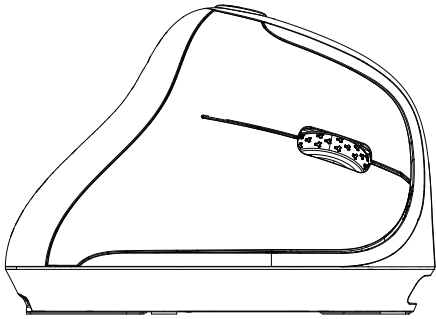

System

Windows7/Windows8/Windows10/ Mac OS

Details

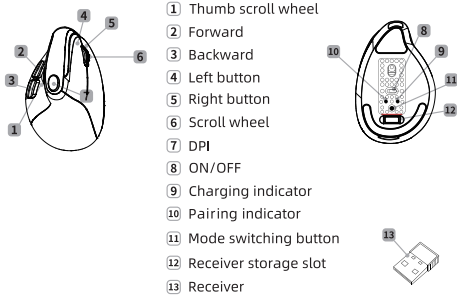

Specification

Size:	166.8*95.9*81.7mm(include palm rest)
Weight:	155.8g±5g (include receiver)
Sensor:	PAW3212
DPI:	800/1200(default)/1600/2400/4000
Working voltage:	3.7V
Working current:	<20mA
Distance:	10m
Battery:	1000 MAH
Connection:	2.4G+BT5.0(dual-mode)
Charging Temperature:	0-45°C
Report rate:	250Hz

Functions

1. Code matching

(1) **2.4G wireless mode:** Press the left button,middle button and right button in the same time, then the backlight flashes red light means it's the code matching status(20s). Plug the receiver into the computer in 30CM distance, then the backlight stop flash means you can use your mouse normally.

(2) **BT mode:** Turn on the mouse,tap the switching button to BT mode. The corresponding indicator light flashes means you entered the BT mode.The indicator light will flash quickly when you press the switching button for about 3s,then you can find "BT5.0 MOUSE" to connect. The indicator light will go off when you connect successfully.
(NOTE: win 7 and the previous operating systems do not support the BT 5.0)

2. Wired/2.4G wireless/bluetooth switching

Tap the mode switching button can switch the connected mode,the corresponding mode indicator flashes(the light goes off when wired connected)when you in one status,and the OLED screen will show you the connected mode.

3. DPI switching

Red light, flash once----- 800DPI
Red light, flash twice-----1200DPI
Red light, flash thrice -----1600DPI
Red light, flash quartic-----2400DPI
Red light, flash five times-----4000DPI

Tap DPI button to switch the DPI.

4. Thumb scroll wheel

Rolling up→Moving to the left
Rolling down→Moving to the right

(Can be used in office software, browser, etc)
(NOTE: The thumb scroll wheel may be unavailable due to software version compatibility issues.)

5. OLED screen:

connect mode, battery, DPI.

6. The mouse enters standby status when the mouse doesn't work for about 1 mintute. Move the mouse can awake the mouse.

7. Charging mode:

Connecting the mouse to the USB port via type C. The indicator light turns red when charging, the light goes off after full charged.

8. Low voltage alert:

When the battery voltage is lower than 3.3±0.1V, the light flashes red to remind you to charge in time; When the voltage is lower than 3.0V±0.1V, the red light flashes fastly, 5S later mouse off.

