





USG LITE 60AX

AX6000 WiFi 6 Security Router

Meet the USG LITE 60AX, a forward-thinking appliance boasting high-performance WiFi 6 technology. Equipped with dual 2.5GbE ports, it offers a swift, intuitive setup and robust network security, ideally suited for the modern demands of small/home offices and teleworkers. The integration of WiFi 6 offers a significant leap in wireless performance, supporting your business with reliable high-speed connections.

Subscription-free network security

Equipped with best-in-class threat management features powered by Zyxel Security Cloud, the USG LITE 60AX detects malicious network activities and prevents drive-by download of wide-spreading ransomware/malware, blocks intrusion/exploit/dark web/ads/VPN proxy and stops mail fraud & phishing. It's subscription-free, making security affordable to small business owners!



Subscription-free Security built-in as standard



Dual 2.5GbE ports for speeds beyond gigabit



Blazingly Fast WiFi 6 for speeds up to 6 Gbps



Simplified setup and manage with Nebula app



VPN made easy with quick deployment



Constructed with 95% recycled plastics






Benefits

Dual 2.5GbE mGig connectivity

Dual 2.5Gbps WAN/LAN ports unlock beyond gigabit speeds from your ISP, provide premium wired connections with remarkable flexibility to tailor both ports to fit your networking needs.

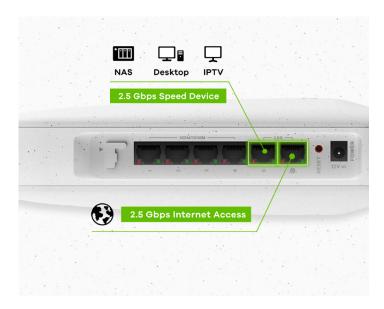

Fast & cloud rich features

Powered with a fast 2.0 GHz quad-core 64-bit CPU, the USG LITE 60AX boasts the performance to effortlessly manage the most demanding networks. It offers unrivaled security and application visibility in your network, while ensuring peak network performance, speeding up data transfers and improving your online experience.



Blazingly fast WiFi 6

The USG LITE 60AX's WiFi 6 dual-band radio delivers superior speed, reliability, and low latency up to 6Gbps. Zyxel's Smart Mesh technology automatically forms dynamic wireless links between USG LITE 60AX and Nebula access points, eliminating the need for complex cabling.

Connected & Secured in Minutes

You can be connected and secured in minutes with a few simple clicks on the Nebula mobile app. The easy step-by-step wizard guides you through the entire installation process. The intuitive app makes it easy to change settings as needed.





Secure VPN Connectivity

The USG LITE 60AX allows you to quickly build a secure connection (site-to-site VPN, remote access VPN) with a few simple steps, making it easier for companies to extend their reach for remote workers like work-from-home staff or teleworkers who often require secure remote access to their head office network(s).



Application Insight & Control

The USG LITE 60AX lets you see how the devices in your network are using the internet with Nebula. This helps you figure out which applications are being used, so you can throttle or block specific applications if needed to ensure your essential applications run smoothly, keeping your business online without interruptions.



Built with Nature in Mind

The USG LITE 60AX eco-design incorporates up to 95% post-consumer recycled (PCR) plastics in its chassis, underlining our commitment to sustainability. At Zyxel, we've reduced packaging volume by 36.7%, eliminated color sleeves, and switched to 100% halogen-free or soy-based inks for box printing. These efforts have resulted in a 47.7% increase in units per pallet and a reduced carbon footprint.



Advance Your Defense with Elite Pack

The Elite Pack license offers extensive Web Filtering across 120+ categories and millions of domains. It also activates advanced Nebula Pro features and enhances protection against ransomware with Zyxel's security cloud technologies.



Elite Pack Comparison

	Subscription Free	Elite Pack (1MO / 1YR / 3YR)
Ransomware / malware prevention	•	•
Intrusion Blocker	•	•
Dark Web Blocker	•	•
Stop mail fraud & phishing	•	•
Block Ads	•	•
Block VPN proxy	•	•
Firewall	•	•
Country Restriction (GeoIP)	•	•
Allow list / Blocklist	•	•
Traffic management (applications & clients)	•	•
Real-time threat intelligence		•
Web Filtering (DNS)		•
Nebula Pro Pack - Advanced feature set		•

Specifications

Wireless		
Standard		IEEE802.11 ax/ac/n/g/b/a
МІМО		MU-MIMO
Wireless speed	2.4 GHz	1148 Mbps
	5 GHz	4804 Mbps
Frequency band	2.4 GHz	USA(FCC):2.412 to 2.462 GHz Europe(ETSI):2.417 to 2.472 Ghz
	5 GHz	USA(FCC):5.15 to 5.25;5.25 to 5.35 GHz 5.47 to 5.725 GHz;5.725 to 5.895 GHz Europe(ETSI):5.15 to 5.25 GHz;5.25 to 5.35GHz 5.47 to 5.725GHz
Bandwidth		20-, 40- ,80-, and 160-MHz
Conducted typical transmit output power*1	US (2.4 GHz/5 GHz)	29.98/29.82 dBm
	EU (2.4 GHz/5 GHz)	19.92/29.90 dBm
Wireless security		Open, WPA2-PSK, WPA3-Personal
SSID number		8
No. of antenna		4 (internal)
Antenna gain		2.4Ghz: 3.65dBi, 4x4: 4SS 5Ghz: 4.63dBi, 4x4: 4SS

System

Performance

- SPI firewall throughput: 2000 Mbps
- Bridge mode throughput: 2000 Mbps
- DPI throughput Application on (routing mode): 2000 Mbps
- Throughput with threat management on: 2000 Mbps
- VPN throughput TCP single session: 100 Mbps
- VPN throughput UDP 1424: 300 Mbps
- Max. TCP concurrent sessions: 20000
- Max. gateway-to-gateway IPsec VPN tunnels: 3
- Max. remote VPN tunnels: 5

Nebula App

- Discovering the USG LITE 60AX via Bluetooth
- Easy onboarding
- Device monitoring and alert
- Dashboard presents application usage, and security level
- Panels for configuring WAN and WiFi
- Purchase licenses

Software

Security

- Ransomware/Malware prevention
- Intrusion blocker
- Dark Web blocker
- Stop mail fraud & phishing
- Block Ads
- Block VPN proxy
- Traffic Management
 - Application block
 - Application traffic shaping
- Web Filtering (Content Filter)*2
- Firewalling
- Country Restriction
- Exception list
- Custom allowed/blocked domain
- IPSec VPN (site-to-site, spoke only)
- Remote access VPN

Wireless Features

- Site-wide SSID provisioning from Nebula cloud
- See wireless client info from the Nebula dashboard
- Auto / Fixed Channel Selection
- Smart Mesh

Networking

- WAN type: Static IP, DHCP, PPPoE, and PPPoE with Static IP
- NAT Virtual server
- DHCP server and DHCP relay
- Dynamic DNS
- Static route
- Reserve IP (IP/MAC binding)
- Block clients
- VLAN Segmentation
- Guest Network
- IPTV

Management

- Client report
- Firmware upgrade
- Configuration backup and restore
- Live tools
- Remote support and diagnostics
- Event Log

Hardware

- CPU: 2.0 GHz Quad-core
- Memory: 1GB
- Flash: 512 MB
- Antenna: 4 internal antennas
- Buttons:
 - Reset
- WAN: One 100/1000/2500 Mbps Ethernet RJ-45 port with auto MDI/ MDIX support
- LAN: One 100/1000/2500 Mbps, and four 100/1000 Mbps Ethernet RJ-45 ports with auto MDI/MDIX support
- LED indicator: 1 LED indicator for status indication
- Power: 12 V DC, 3.0 A

Power consumption: 31 watt Physical Specifications

- Item dimensions(L x W x H): 161.7 x 65 x 229 mm (6.37" x 2.56" x 9.02")
- Item weight: 707 g
- Packing dimensions(L x W x H): 266 x 259 x 73 mm (10.47" x 10.20" x 2.87")
- Packing weight: 1.47 kg

Environment

Operating Environment

- Temperature: 0°C to 40°C (32°F to 104°F)
- Humidity: 5% to 95% (Non-condensing)

Storage Environment

- Temperature:
 - -30°C to 70°C (-22°F to 158°F)
- Humidity: 5% to 95% (Non-condensing)

Certifications

• CE, FCC, BSMI

Package Contents

- 1 x USG LITE 60AX
- 1 x Power Adapter
- DoC and safety warning
- *1: Maximum transmit power is limited by local regulatory settings.
- *2: Requiring Elite Pack

Interface

