

# Delock PCI Express x8 Hailo-8™ AI Processor x2 AI-Accelerator

## Description


This PCI Express AI accelerator card by Delock enables the use of the **Hailo-8™ AI processor** in edge computers and offers an easy to implement solution to enable **cost-efficient edge AI computing** with higher processing performance and lower power consumption.

### PCI Express 3.0

The card also enables computers such as NVRs, Edge AI boxes, industrial PCs and robots to run video-intensive Edge AI applications such as **video analytics, traffic management and access control**.

### Hailo-8™ AI inference processor x2

The card can deliver up to **52 TOPS** (Tera-Operations Per Second), making it suitable for demanding computer vision applications.

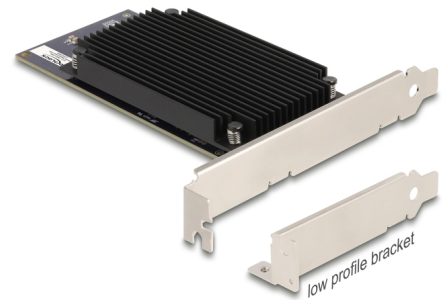

**Item no. 31416**

EAN: 4043619314164

Country of origin: China

Package: Retail Box

## Technical details

- Connector:
  - 1 x PCI Express x8, V3.0
- Hailo-8™ AI processor x2
- 52 TOPS AI performance
- Hailo-8™ Software Suite:
  - Dataflow Compiler (Model conversion and compilation)
  - HailoRT (Runtime environment and driver)
  - Model Zoo (Pre-trained models)
  - TAPPAS (Deployment framework, examples and multi-network pipelines)
- Supports TensorFlow, TensorFlow Lite, ONNX, Keras, Pytorch
- Low power consumption
- Operating temperature: 0 °C ~ 50 °C

## System requirements

- Linux (Ubuntu 20.04 / 22.04)
- Windows 11 (only driver and API)

---

## Package content

- PCI Express card
- Low profile bracket
- User manual

---

## Images



## General

Form factor:	Low Profile
Supported operating system:	Windows 11 Linux Kernel 6.5 or above

## Technical characteristics

Chipset:	Hailo-8™
Operating temperature:	0 °C ~ 50 °C

## Physical characteristics

Slot bracket:	Low Profile standard
---------------	-------------------------

## Herstellerinformation

---

Strasse	Beeskowdamm 13/15
PLZ	14167
Ort	Berlin
Land	Deutschland
E-Mail	info@delock.de
Webseite	www.delock.de