

UniFi UISP Branding

Search UniFi products

Switching WiFi Camera Security Door Access CloudKeys & Gateways Power Tech Inte


Readers > G2 Reader

Datasheet

In The Box

Marketing Images

Installation Guide

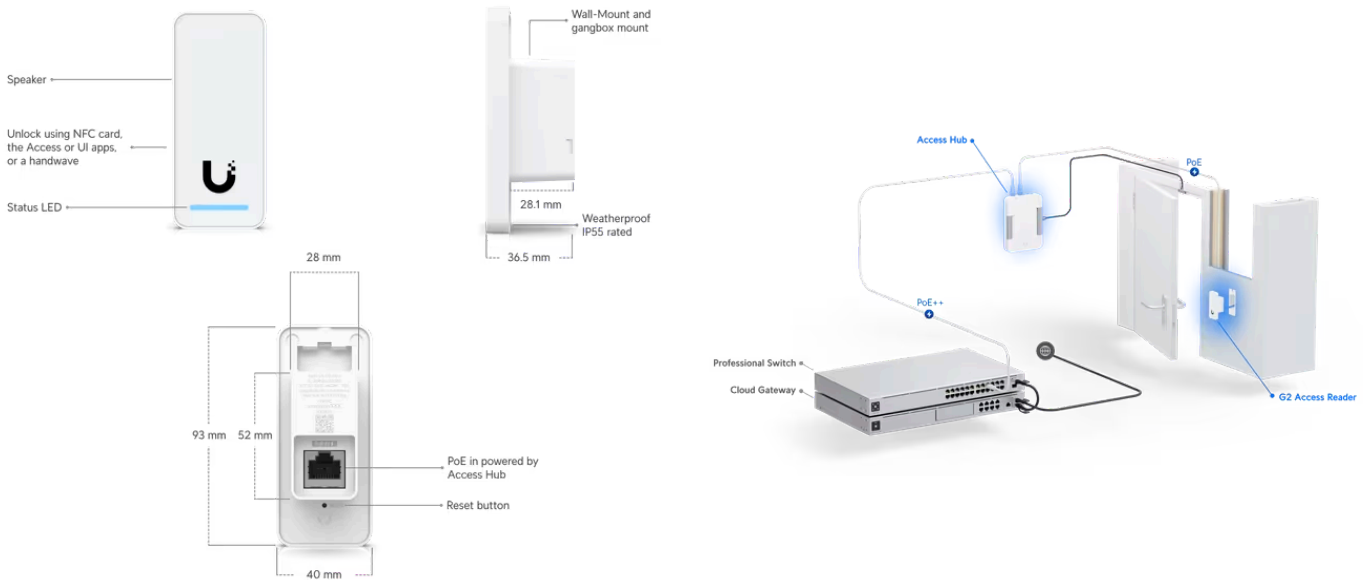

Mechanical

Dimensions	93 x 40 x 36.5 mm (3.7 x 1.6 x 1.4")
Weight	82 g (2.9 oz)
Enclosure material	Polycarbonate, glass
Mounting	In wall, gang box
Weatherproofing	IP55

Hardware

Networking interface	(1) 10/100 MbE RJ45 port
-----------------------------	--------------------------

Connectivity	BLE 4.1
Power method	PoE UL 294 Power-limited Class 2 PSU UL 60950-1/62368-1 LPS/PS2 PSU
Supported voltage range	48V DC
Max. power consumption	5W
ESD/EMP protection	Air: ±15kV, contact: ±8kV
Sensors	Proximity sensor
Speaker	(1) 8 ohm, 0.7W
LEDs	R/G/B/W (Learn more)
Button	(1) Factory-reset
NFC frequency	13.56 MHz
NFC read range	< 30 mm
NFC technology	ISO/IEC 14443A / 14443B / 15693 / 18092 (Ecma 340) MIFARE Classic / MIFARE DESFIRE Sony FeliCa™ (ID only) NFC Forum tags T1T, T2T, T3T, T4T and T5T
Operating environment	Outdoor use
Ambient operating temperature	-30 to 45° C (-22 to 113° F)
Ambient operating humidity	5 to 90% noncondensing
Software information	The software version of a product can be checked at https://unifi.ui.com
UL 294 level	Destructive attack: Level I Line security: Level I Endurance: Level I Standby power: Level I
UL 294 statement	Compliance with IEEE 802.3 specifications was not verified as part of UL 294. The equipment is intended to comply with the section of the National Electrical Code, ANSI/NFPA 70, Article 725.121, Power Sources for Class 2 and Class 3 Circuits.
PoE cabling requirements	Cable 5e cabling is the minimum performance category recommended. The performance category utilized should match the transmission speed required at the installation site. The minimal conductor gauge permitted to connect between the PSE or power injector and the PD shall be 26 AWG (0.13 mm ²) for patch cords; 24 AWG (0.21 mm ²) for horizontal or riser cable.

CAN/ULC-60839-11-1 Grade	Grade assignment: I
Certifications	CE, FCC, IC, UL 294, CAN/ULC-60839-11-1
Document number, and issue date and/or revision level	UA-G2/UA-G2-Black, V02

Software

Management application	UniFi Access: Version 1.5.9 and later
-------------------------------	---------------------------------------

Stay in Touch

[Terms of Service](#) | [Privacy Policy](#) | [Legal](#) | [Cookies Settings](#)

© 2025 Ubiquiti, Inc. All rights reserved.