


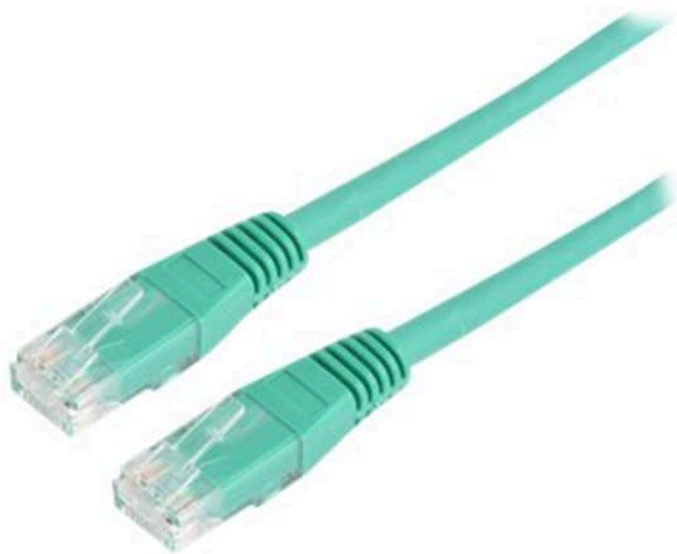

Prokord UTP-0040

Data sheet

Core Specs

Connector 1	RJ-45
Connector 2	RJ-45
Cable standard	Cat 6
Cable shielding	U/UTP (UTP)
Cable length	15 m
Jacket material	LSZH

Summary

- ✓ Cat6 construction delivers up to 10 Gbit/s throughput at 250MHz
- ✓ Unshielded UTP with copper conductors ensures stable Ethernet links
- ✓ LSZH jacket lowers smoke and halogen risk, suited for confined spaces
- ✓ Supports Power over Ethernet, ideal for cameras and access points
- ✓ 15 m green cable with RJ45 male ends, ready for plug and play

Product description

Why choose this network cable?

Prokord TP-Cable UTP CAT.6 Unshielded Lszh RJ45 15m Green. This 15 m Cat 6 UTP cable provides steady gigabit and multi-gigabit links for office and wiring runs. The LSZH jacket reduces smoke and halogen emissions, making it suitable for installations in confined or public spaces. Standard RJ45 male connectors and PoE support make it easy to connect switches, access points and IP devices.

TP-Cable UTP CAT.6 Unshielded Lszh RJ45 15m Green in short:

- Cat 6 performance for reliable gigabit and multi-gigabit network connections, supporting up to 10 Gbit/s at 250 MHz.
- 15 m length, practical for desk-to-switch and patch panel runs in offices and comms rooms.
- Low smoke zero halogen jacket reduces hazardous emissions, suitable for public buildings and enclosed spaces.
- Unshielded UTP design fits typical office environments; consider shielded cable where electromagnetic interference is significant.
- Supports Power over Ethernet to power access points, IP phones and other PoE devices.

Product details

TP-Cable UTP CAT.6 Unshielded Lszh RJ45 15m Green uses 26 AWG copper conductors with male RJ45 connectors on both ends for straightforward patching and device connections. The green LSZH jacket helps with cable identification in dense installations and complies with safety requirements for low-smoke environments. The cable supports standard Ethernet deployments and PoE, making it suitable for connecting switches, access points, IP phones and workstations.

Technical Specification Matrix

Header

Manufacturer	Prokord
--------------	---------

Features

Cable length	15 m
Cable standard	Cat 6
Cable shielding	U/UTP (UTP)
Connector 1	RJ-45
Connector 1 gender	Male
Connector 2	RJ-45
Connector 2 gender	Male

Product colour	Green
Jacket material	LSZH
Conductor material	Copper
Data transfer rate	10000 Mbit/s
AWG wire size	26
Frequency	250 MHz
Power over Ethernet (PoE)	Yes

Packaging data

Quantity per pack	1 pc(s)
-------------------	---------

Logistics data

Harmonized System (HS) code	84733080
-----------------------------	----------