


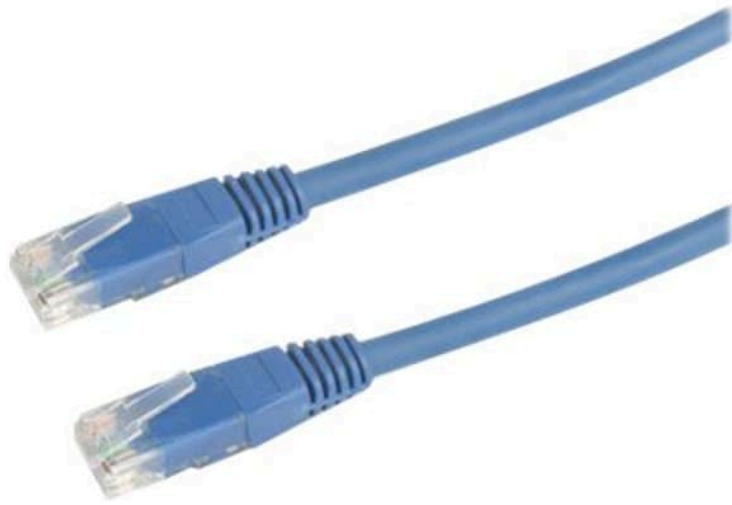

Prokord UTP-0057

Data sheet

Core Specs

Connector 1	RJ-45
Connector 2	RJ-45
Cable standard	Cat 6
Cable shielding	U/UTP (UTP)
Cable length	20 m
Jacket material	LSZH

Summary

- ✓ Cat6 cable delivers 10 Gbit/s performance, ideal for fast networks
- ✓ 250 MHz bandwidth and 26 AWG copper conductors keep data stable
- ✓ PoE compatible, powers cameras and access points without extra wiring
- ✓ LSZH jacket reduces smoke and halogen gas, safer in enclosed spaces
- ✓ 20m blue UTP with RJ45 plugs, flexible routing and plug and play

Product description

Why choose this network cable?

Prokord TP-Cable UTP CAT.6 Unshielded Lszh RJ45 20m Blue. Use this cable when you need a reliable, easy-to-deploy link between switches, access points, and endpoints. The LSZH jacket reduces smoke and toxic fumes in enclosed spaces, the 20 m length gives flexible placement, and the Cat 6 performance supports higher-speed LANs and PoE devices.

TP-Cable UTP CAT.6 Unshielded Lszh RJ45 20m Blue in short:

- Cat 6 UTP cable for fast local networks, suitable for desktop-to-switch and patch-panel connections.
- Supports up to 10 Gbit/s and 250 MHz, useful for modern Ethernet and PoE deployments.
- LSZH jacket and copper conductors for safer indoor installations and stable signal quality.
- Molded RJ-45 male connectors with strain-relief boots for secure, durable connections.
- Consider that the cable is unshielded, so choose shielded cables for high-interference environments.

Product details

This Prokord cable provides a straightforward way to extend network connectivity over a 20 metre run. It uses solid copper conductors and standard RJ-45 male connectors to ensure compatibility with switches, routers, IP phones, and access points. The low smoke zero halogen jacket makes it appropriate for offices, server rooms, and other indoor areas where reduced toxic emissions are desirable. The unshielded design keeps installation simple for typical office and data rack environments, while supporting Power over Ethernet to power compatible devices.

Technical Specification Matrix

Header

Manufacturer	Prokord
--------------	---------

Features

Cable length	20 m
Cable standard	Cat 6
Cable shielding	U/UTP (UTP)
Connector 1	RJ-45
Connector 1 gender	Male
Connector 2	RJ-45
Connector 2 gender	Male
Product colour	Blue
Jacket material	LSZH

Conductor material	Copper
Data transfer rate	10000 Mbit/s
AWG wire size	26
Frequency	250 MHz
Power over Ethernet (PoE)	Yes

Packaging data

Quantity per pack	1 pc(s)
-------------------	---------

Logistics data

Harmonized System (HS) code	84733080
-----------------------------	----------