


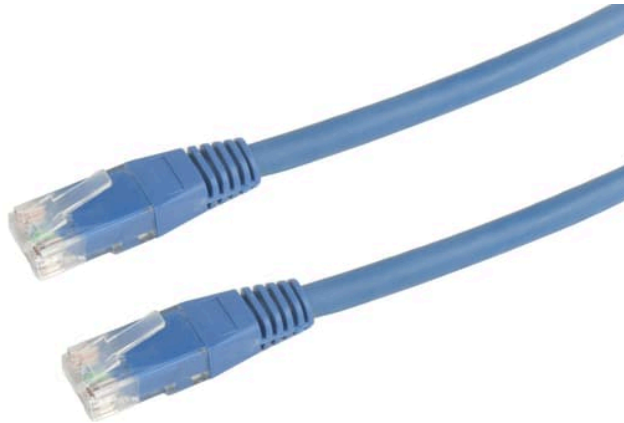

TP-Cable UTP CAT.6 Unshielded Lszh RJ45 2m 10pcsRJ-45 Cat 6 1.5m Blue

Data sheet

Summary

- ✓ Cat 6 U/UTP patch cable, suitable for high-speed links between switches, patch panels, and sockets.
- ✓ LSZH jacket for installations where low smoke and halogen-free materials are required.
- ✓ RJ-45 male to male connectors and PoE support, useful for powering access points and VoIP phones.
- ✓ Pack of 10 blue cables, convenient for multi-port rollouts and cable management.
- ✓ Consider whether unshielded UTP is appropriate for your environment, especially near strong electromagnetic interference.

Product description

Why choose this network cable?

Prokord TP-Cable UTP CAT.6 Unshielded Lszh RJ45 2m 10pcs. This Cat 6 patch cable delivers reliable performance for typical office and data closet connections, with support for up to 10 000 Mbit/s and a 250 MHz rating. The LSZH jacket limits smoke and hazardous emissions in enclosed spaces, and the pack of ten simplifies deployments of access points, switches, and workstations.

TP-Cable UTP CAT.6 Unshielded Lszh RJ45 2m 10pcs in short:

- Cat 6 U/UTP patch cable, suitable for high-speed links between switches, patch panels, and sockets.
- LSZH jacket for installations where low smoke and halogen-free materials are required.
- RJ-45 male to male connectors and PoE support, useful for powering access points and VoIP phones.
- Pack of 10 blue cables, convenient for multi-port rollouts and cable management.
- Consider whether unshielded UTP is appropriate for your environment, especially near strong electromagnetic interference.

Product details

The Prokord TP-Cable UTP CAT.6 Unshielded Lszh RJ45 2m 10pcs uses 26 AWG copper conductors to provide stable signal transmission for typical enterprise network distances. It is designed as a straightforward patching solution for offices and wiring closets, with robust RJ-45 plugs and a flexible LSZH jacket for easy routing and space compliance. The cable supports common PoE deployments and works well where Cat 6 performance is required without the need for additional shielding.

Technical Specification Matrix

Header

Manufacturer	Prokord
--------------	---------

Features

Cable length	1.5 m
Cable standard	Cat 6
Cable shielding	U/UTP (UTP)
Connector 1	RJ-45
Connector 1 gender	Male
Connector 2	RJ-45
Connector 2 gender	Male
Product colour	Blue

Jacket material	LSZH
Conductor material	Copper
Data transfer rate	10000 Mbit/s
AWG wire size	26
Frequency	250 MHz
Power over Ethernet (PoE)	Yes

Packaging data

Quantity per pack	10 pc(s)
-------------------	----------

Logistics data

Harmonized System (HS) code	84733080
-----------------------------	----------