


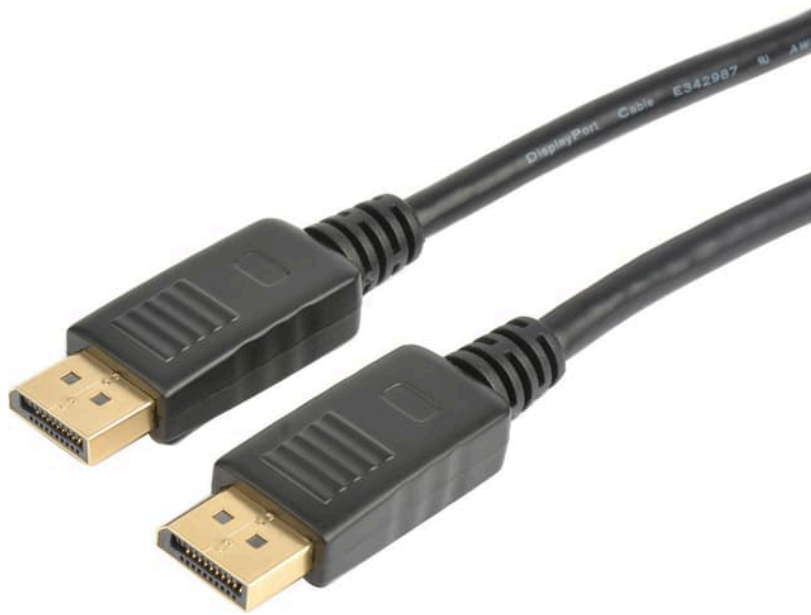

Active Displayport - Displayport 15m Black15m DisplayPort DisplayPort Black

Data sheet

Summary

- ✓ Active DisplayPort 1.2 cable, designed to maintain signal integrity over 15 m for 4K at 60Hz.
- ✓ Gold-plated male connectors, straight form factor, compatible with standard DisplayPort ports.
- ✓ Robust build with tinned copper conductors, aluminium foil plus braid shielding, and a TPE/LSZH jacket.
- ✓ Supports Multi-Stream Transport for daisy-chaining monitors and HDCP for protected content, no HDR support.
- ✓ Consider cable routing and strain relief, the length and weight require proper cable management.

Product description

Why choose this DisplayPort cable?

Prokord Active Displayport - Displayport 15m Black provides a stable, long-reach DisplayPort 1.2 connection for 4K displays. It delivers 4K at 60Hz across a 15 metre run with active signal support, and enables multi-monitor setups and protected content playback through MST and HDCP. Durable construction and an LSZH jacket make it suitable for managed installations.

Active Displayport - Displayport 15m Black in short:

- Active DisplayPort 1.2 cable, designed to maintain signal integrity over 15 m for 4K at 60Hz.
- Gold-plated male connectors, straight form factor, compatible with standard DisplayPort ports.
- Robust build with tinned copper conductors, aluminium foil plus braid shielding, and a TPE/LSZH jacket.
- Supports Multi-Stream Transport for daisy-chaining monitors and HDCP for protected content, no HDR support.
- Consider cable routing and strain relief, the length and weight require proper cable management.

Active Displayport - Displayport 15m Black

This Prokord cable connects sources and displays where longer runs are needed, keeping a reliable DP 1.2 link for high-resolution video and multi-display layouts. The active design helps reduce signal degradation over distance, while gold-plated contacts and full shielding lower the risk of interference. The TPE and LSZH outer jacket, 10 mm diameter, and 24 AWG conductors provide a balance of flexibility and durability for installed environments.

Technical Specification Matrix

Header

Manufacturer	Prokord
--------------	---------

Features

Cable length	15 m
Connector 1	DisplayPort
Connector 1 gender	Male
Connector 1 form factor	Straight
Connector 2	DisplayPort
Connector 2 gender	Male
Connector 2 form factor	Straight
Product colour	Black
Maximum resolution	4Kx2K pixels

Connector contacts plating	Gold plated
DisplayPort version	1.2
Cable material	Tinned copper
Maximum refresh rate	60 Hz
HDCP	Yes
Data transfer rate	5.4 Gbit/s
Cable shielding	Aluminium foil + braid
Jacket material	LSZH, TPE
AWG wire size	24AWG
High Dynamic Range (HDR) supported	No
Multi-Stream Transport (MST)	Yes

Packaging data

Weight	1867 g
Cable diameter	10 mm

Logistics data

Harmonized System (HS) code	84733080
-----------------------------	----------