


10x

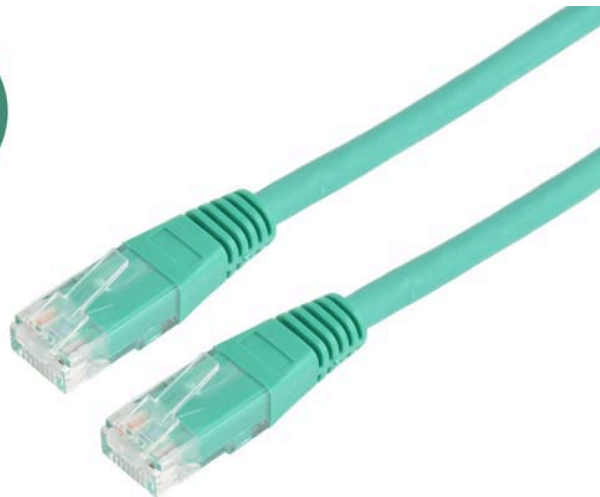

TP-Cable UTP CAT.6 Unshielded Lszh RJ45 2m 10pcsRJ-45 Cat 6 2m Green

Data sheet

Summary

- ✓ Cat 6 UTP cable rated to 250 MHz, suitable for high-speed local connections and backbone patches.
- ✓ Supports up to 10000 Mbit/s, making it suitable for 10 Gbit/s capable links over short distances.
- ✓ Low smoke zero halogen (LSZH) jacket for safer installations in offices, server rooms, and public areas.
- ✓ Male-to-male RJ-45 connectors, 2 m length and green colour for easy identification and tidy cable management.
- ✓ Pack of 10 cables, useful when you need multiple patch leads or spares for racks and workstations.

Product description

Why choose this network cable?

Prokord TP-Cable UTP CAT.6 Unshielded LSZH RJ45 2m 10pcs offers a practical, safe solution for short network runs. It delivers high data throughput and PoE capability while the low smoke zero halogen jacket reduces toxic emissions in confined spaces, helping you meet safety and installation requirements with fewer cable changes.

Prokord TP-Cable UTP CAT.6 Unshielded Lszh RJ45 2m 10pcs in short:

- Cat 6 UTP cable rated to 250 MHz, suitable for high-speed local connections and backbone patches.
- Supports up to 10000 Mbit/s, making it suitable for 10 Gbit/s capable links over short distances.
- Low smoke zero halogen (LSZH) jacket for safer installations in offices, server rooms, and public areas.
- Male-to-male RJ-45 connectors, 2 m length and green colour for easy identification and tidy cable management.
- Pack of 10 cables, useful when you need multiple patch leads or spares for racks and workstations.

Product details and use

This Prokord cable connects switches, patch panels, and network devices using standard RJ-45 ports. The copper conductors and 26 AWG wiring provide reliable signal transmission for Ethernet and Power over Ethernet applications. The 2 metre length is convenient for short patching tasks and helps keep racks and desks neat. The unshielded UTP design is ideal for typical office and data-centre environments where shielding is not required.

Technical Specification Matrix

Header

Manufacturer	Prokord
--------------	---------

Features

Cable length	2 m
Cable standard	Cat 6
Cable shielding	U/UTP (UTP)
Connector 1	RJ-45
Connector 1 gender	Male
Connector 2	RJ-45
Connector 2 gender	Male
Product colour	Green
Jacket material	LSZH
Conductor material	Copper

Data transfer rate	10000 Mbit/s
AWG wire size	26
Frequency	250 MHz
Power over Ethernet (PoE)	Yes

Packaging data

Quantity per pack	10 pc(s)
-------------------	----------

Logistics data

Harmonized System (HS) code	84733080
-----------------------------	----------