


Overview

Designed for basic data protection, the HP StorageWorks 1/8 G2 Tape Autoloader provides cost-effective, easy-to-install unattended backup. In a rack or on a desktop, it provides up to 6.4 TB of compressed storage capacity in a compact 1U form factor. The 1/8 G2 is equipped with one Ultrium 920, Ultrium 448 or Ultrium 232 Tape Drive and can hold up to eight data cartridges to accommodate a week's worth of backup. In order to easily manage your media, standard features include a bar code reader and two removable 4-slot magazines. Manage the autoloader from across the room or across the globe with the web-based remote management interface. All 1/8 G2 models include HP StorageWorks Data Protector Express, Single Server Edition for Windows/Linux/NetWare.

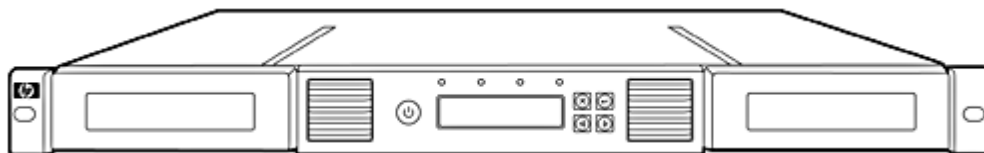

What's New

- Integration of the HP StorageWorks Ultrium 920 SAS Tape Drive
 - The HP StorageWorks 1/8 G2 Ultrium 920 SAS Tape Autoloader with a 3Gb/sec SAS interface offers a direct connect option to SAS-based servers, such as HP ProLiant Servers.

Key Features

- Up to 6.4 TB of compressed storage capacity (2:1) in a 1U form factor
- 1 drive to 8 slot ratio provides for weekly automated backup
- Integrated barcode reader
- Removable magazines with single mail slot
- Rack or tabletop use
- Ultrium 920 SCSI and SAS, Ultrium 448 and Ultrium 232 configurations
- Web-based remote management capability
- Customer replaceable components
- Investment protection as capacity and performance needs change
- Complete solution in the box

Customer benefits

- Provides an exceptional amount of backup and recovery storage without consuming valuable rack space.
- Easily transition from standalone tape to an automated backup solution.
- Provides faster inventory times and facilitates tracking of media.
- Offers single cartridge or bulk loading of media, as well as providing for bulk storage of media off-site.
- Reduce installation time with rack-ready units or install enclosed rubber feet for desktop use.
- Flexible tape technology and interface choices to best suit your backup storage needs.
- Allows a remote administrator to control, configure, monitor and troubleshoot the device, thus relieving the customer of requiring onsite IT resources.
- Modular design of tape library allows for quick repair of unit to reduce product downtime.
- Interchange 1/8 G2 Tape Autoloader drives into HP StorageWorks MSL2024 or MSL4048 Tape Libraries as performance and capacity needs change.
- Includes HP StorageWorks Data Protector Express, Single Server Edition for Windows.

Overview

Family Comparison	1/8 G2 Ultrium 920 Tape Autoloader	1/8 G2 Ultrium 448 Tape Autoloader	1/8 G2 Ultrium 232 Tape Autoloader
Drive Technology	Ultrium 920	Ultrium 448	Ultrium 232
Capacity (compressed 2:1)	6.4 TB	3.2 TB	1.6 TB
Maximum Data Transfer (compressed 2:1)	120 MB/s	48 MB/s	32 MB/s
Interface	3Gb/sec SAS Ultra320 SCSI LVD/SE	Ultra160 SCSI LVD/SE	Ultra160 SCSI LVD/SE

Product Highlights

Easy Installation

The 1/8 G2 Tape Autoloader ships as a rack-ready unit. A separate 1/8 G2 Tape Autoloader Rack Kit must be purchased to allow installation in a variety of HP racks which include the 10000 series, 9000 series, 5000 series and System/E racks.

A set of rubber feet are included in the box if you choose to use the unit on a tabletop or desk. For additional structural rigidity, HP recommends the purchase of the 1/8 G2 Rack-to-Tabletop conversion kit which has a maximum load of 33 pounds (15 kilograms) and fully encloses the unit.

Software in the Box

The 1/8 G2 Tape Autoloader includes HP StorageWorks Data Protector Express, Single Server Edition for Windows/Linux/NetWare. This application allows you to securely back up, and if necessary recover, a single Windows/Linux/NetWare machine to/from your HP StorageWorks tape drive or tape autoloader.

NOTE: HP StorageWorks Data Protector Express, Single Server Edition and HP OpenView Storage Data Protector, Single Server Edition are NOT compatible. Tape cartridges should NOT be shared between autoloaders and libraries running Data Protector and Data Protector Express.

Manageability

The 1/8 G2 Tape Autoloader allows web-based remote manageability; the unit can be monitored and managed from across the room or across the globe. Functions included in the management tool include:

- Status information on the drive and system
- System configuration operations and reporting
- System error and status logs
- Library and drive firmware upload capabilities
- Diagnostic tests and information
- Cartridge movement for maintenance and management purposes
- Cleaning cartridge support
- Security and access control
- SNMP support for IP communications

Serviceability

Modular in construction, the 1/8 G2 Tape Autoloader has easily replaceable components minimizing the Mean-Time-to-Repair on the unit. Replaceable components include the tape drive, the magazines, and the chassis (includes robot, power supply, and controller board). HP StorageWorks Library and Tape Tools (L&TT) provides easy access to the 1/8 G2 Tape Autoloader error log, generates support tickets, and enables firmware downloads. L&TT can be downloaded for free at <http://www.hp.com/support/tapetools>

LTO Ultrium Technology

HP StorageWorks LTO (Linear Tape Open) Ultrium Tape Drives use best of breed technology. By taking the best features from other tape technologies and combining them into a single new technology, Ultrium tape drives are in a league of their own. Inclusion of innovative features such as Adaptive Tape Speed (ATS) ensure that Ultrium drives can meet the performance and reliability demands of a library environment. LTO technology is an open industry standard format; thus data written on HP StorageWorks Ultrium Tape Drives can be interchanged directly with Ultrium Tape Drives from other vendors.

Product Highlights

Data Rate Matching

Data Rate Matching combines sophisticated buffer management with HP's exclusive Infinitely Variable Adaptive Tape Speed technology, to allow the tape drive to match its transfer rate to the host speed dynamically and continuously across the whole range of transfer rates. This feature ensures that the tape drive continues to stream data regardless of the environment, and brings two big advantages:

- It optimizes performance, regardless of the speed of the host or the network
- It minimizes rewinding and repositioning of the tape, thus reducing wear and increasing reliability

HP Ultrium WORM

Critical to the success of data retention policies in highly regulated environments is the ability to store and manage data in an unalterable state. Following stringent guidelines set forth by regulatory agencies such as the SEC and HIPPA, IT organizations must now integrate new solutions and policies that can verify the integrity of stored data for periods that can extend well beyond seven years.

The Ultrium 960 and 920 tape drives feature the ability to archive and store data in a non-rewriteable format that meets the most stringent regulatory guidelines. Using a combination of integrated fail-safe features in the drive firmware, cartridge memory, and tape formatting, the Ultrium 960 and 920 can archive large amounts of data for periods of up to 30 years in a secure, untampered state. Since all Ultrium 960 and 920 tape drives include support for both rewritable and WORM media, IT organizations can now easily integrate a secure, long-term archiving solution into their current data protection strategy. As compared to other technologies that feature support for WORM storage, the Ultrium 960 and 920 offers the advantages of:

- A single drive to support all backup and archiving needs
- Two distinctive tape cartridges to easily distinguish and manage both rewriteable and WORM data cartridges
- A specially designed WORM data cartridge with multiple integrated fail-safe features to prevent accidental or intentional overwriting of data
- High-capacity, low-cost HP WORM media that can store 800GB of data on a single data cartridge
- Support from many backup and archiving software vendors, providing the most comprehensive and mainstream support in the industry
- The LTO open standard that offers greater choice and compatibility across all third-generation Ultrium products

NOTE: While all HP Ultrium 960 and 920 tape drives support LTO Ultrium WORM media, some third-generation LTO Ultrium tape drives from other manufacturers may not include read and write support for LTO Ultrium WORM media. For non-HP third-generation LTO Ultrium tape drives, please check the manufacturers' specifications to ensure this support is provided if you are using your WORM media. If WORM support is not provided, the drive will eject the WORM tape cartridge immediately upon insertion into the tape drive.

HP StorageWorks Library and Tape Tools

The 1/8 G2 Tape Autoloader is supported on HP's industry-leading diagnostic tool - HP StorageWorks Library and Tape Tools (L&TT). L&TT is a single, convenient program that's a snap to install and simple to operate. L&TT's intuitive user interface eliminates the need for training and deploys in less than five minutes. This robust diagnostic tool is designed for both the experienced professional and the untrained administrator. It ensures product integrity through self-diagnostics and fast resolution to device concerns. Additional information on L&TT plus download information can be found at <http://www.hp.com/support/tapetools>.

Product Highlights

HP Storage Media

HP recommends that you use HP-branded cartridges in the 1/8 G2 Tape Autoloader to assure the highest level of protection for your valuable data. The test program for HP media is the most thorough and comprehensive in the industry.

All HP cartridges must satisfy an exhaustive battery of additional tests that relate directly to real life situations, where real data and real businesses are at stake. The benefit of the HP brand specification for media is consistent quality. Through the testing of thousands of HP drives and HP cartridges, the ideal formulation for backup performance is defined and then continuously monitored. This hugely resource-intensive process is unique to HP and affords deep insight into the HP+HP backup solution for a wide range of environments and duty cycles. Your best choice for ease of support and maximum dependability is to use HP-branded Ultrium cartridges at all times.

Factory Express Portfolio for Servers and Storage

HP Factory Express offers configuration, customization, integration and deployment services for HP servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed. Customization must comply with all relevant product specifications and factory supported configurations.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HP products supported through Factory Express include a wide array of servers and storage: HP Integrity, HP ProLiant, HP ProLiant Server Blades, HP BladeSystem, and HP 9000 servers as well as MSA, VA7xxx, EVA, and XP disk arrays, rackable tape libraries and configurable network switches.

Type of service support varies by platform and product family. For more information on Factory Express services for your specific server model or storage device please contact your sales representative or go to <http://www.hp.com/go/factory-express>.

Compatibility

HP's extensive compatibility testing program assures that your HP StorageWorks 1/8 G2 Tape Autoloader works with leading servers, operating systems, and backup applications - and not just those sold by HP. The 1/8 G2 Tape Autoloader works seamlessly in many environments, making them especially suitable if you have a mixed system environment. For the latest list of servers, workstations, operating systems, and backup software that support the 1/8 G2 Tape Autoloader, check the HP StorageWorks Enterprise Backup Solution compatibility matrix at <http://www.hp.com/go/ebs>.

NOTE: The 1/8 G2 Tape Autoloader requires an HBA with multiple LUN support and should not be used with RAID or Array controllers.

Server Compatibility

The 1/8 G2 Tape Autoloader is supported on a wide range of HP systems. For details of which 1/8 G2 Tape Autoloader works with which systems, including third-party systems, reference the EBS compatibility matrix at <http://www.hp.com/go/ebs> for the latest hardware compatibility information.

OS Support

Reference the EBS compatibility matrix for the most up-to-date OS compatibility information at <http://www.hp.com/go/ebs>.

Software Support

Reference the EBS compatibility matrix for the most up-to-date software compatibility information at <http://www.hp.com/go/ebs>.

Service and Support, HP Care Pack, and Warranty Information

Warranty

The warranty for this product consists of 1-year parts exchange, next business day.

Warranty Upgrade Options

- Response - Upgrade on-site response from next business day to same day 4-hours
 - Coverage - Extend hours of coverage from 5 days x 9 hours to 7 days x 24 hours
 - Duration - Select duration of coverage for a minimum period of 1 year or multiple years
-

HP Care Pack Information

HP Care Pack is defined as an upgrade to the product warranty attribute, available for a specific duration and hours of coverage.

- HP Care Pack is not available for less than the products warranty duration.
- HP Care Pack is available for sale anytime during the warranty period for most products, but the commencement date will be the same as the warranty start date (delivery date to end user customer). Proof of purchase may be required.
- HP Care Pack services are prepaid.

For additional HP Care Pack (hardware & software) information, as well as orderable part numbers, please refer to the URL <http://www.hp.com/hps/carepack/>.

Hardware Product Services

- Installation services
- On-site Maintenance (includes warranty support)
- Response time upgrades during the warranty period
- Post-warranty coverage
- RAID setup and performance consulting via statement of work

For additional hardware installation and maintenance information, please refer to the URL listed below: <http://www.hp.com/hps/hardware/>

eSupport

HP eSupport is a portfolio of technology-based services that assist you with managing your business environment - from the desktop to the data center.

Support Portal

The HP support portal provides one-stop access to the information, tools and services you need to manage the daily operations of your IT environment.

Features include:

- Access to self-solve tools (including search technical knowledge base)
- Efficient logging and tracking of support cases
- Collaboration with other business and IT professionals
- Download of patches and drivers
- Access to diagnostic tools
- Proactive notification of relevant information

Access to certain features of the support portal requires an HP service agreement. To access the support portal, visit <http://www.hp.com/support>

Service and Support, HP Care Pack, and Warranty Information

Support Services

HP Services provides up to a three-year, limited warranty, fully supported by a worldwide network of resellers and service providers and 9x5 hardware technical phone support during the warranty period. In addition, available service offerings include a full range of optional packaged hardware and software services:

- Installation and start up
- Extended coverage hours and enhanced response times
- System management and performance services
- Availability and recovery services

Components

The following brick level options/components do not have individual HP Care Pack Services. These items will be included in product HP Care Pack Services into which they are installed.

Disk Drives	Tape Drives	CD/DVD ROM	SCSI Hubs in SBBs	Adapters
Bus Converters	Backplane RAID Controllers	Power Supplies	Cabling	Fans

Configuration Information

NOTE: : The HP StorageWorks 1/8 G2 Tape Autoloader comes standard as a one drive, 8-slot unit which is shipped rack-ready. The separate 1/8 G2 Tape Autoloader Rack Kit must be purchased to complete the rack installation. For specific regional power cord requirements, a separate power cord must be ordered.

Step 1 – Base Configuration

Select one:

Model Name	Model Description	Part Number
HP StorageWorks 1/8 G2 Tape Autoloader	HP 1/8 G2 Ultrium 920 SAS Tape Autoloader	AH558A
	HP 1/8 G2 Ultrium 920 Tape Autoloader	AH165A
	HP 1/8 G2 Ultrium 448 Tape Autoloader	AH164A
	HP 1/8 G2 Ultrium 232 Tape Autoloader	AH163A
	Kit Contents (for each autoloader):	
	<ul style="list-style-type: none"> • (1) 1.83M US Power Cord, C13, 10A (SAS config only) • (1) 2.5M PDU Power Cord, C13/C14, 10A (SAS config only) • (1) 6' VHDCI to HDTS68 SCSI cable (SCSI configs only) • (1) 2M External Infiniband (SFF8470) to Mini SAS (SFF8088) 1x SAS Cable (SAS config only) • (1) RJ-45 Ethernet cable • (1) HDTS68 SCSI terminator (SCSI configs only) • Set of six rubber feet (for tabletop use) • HP StorageWorks Data Protector Express CD (for use in downloading the Single Server Edition for Windows/Linux/NetWare) • Documentation kit including User & Service Guide (CD) and Getting Started Poster 	

Step 2 – Required Options

Select each required option with quantities specified:

Power Cord	Description	Quantity	Part Number
	Power Cord, US, C13, 10A, 1.83m NOTE: Can be used to connect the rack-mounted device to PDUs with NEMA 5-15R receptacles.	1 each	AF556A
	PDU Power Cord, C13/C14, 10A, 2.5m NOTE: Can be used to connect the rack-mounted device to PDUs with IEC-320 receptacles.	1 each	142257-002
	Power Cord, Euro, C13,10A , 1.83m	1 each	AF568A
	Power Cord, UK, C13,10A , 1.83m	1 each	AF570A
	Power Cord, Danish, C13, 10A , 1.83m	1 each	AF566A
	Power Cord, Swiss, C13,10A , 1.83m	1 each	AF565A
	Power Cord, Italian, C13,10A , 1.83m	1 each	AF571A
	Power Cord, South Africa, C13,10A , 2.5m	1 each	AF567A
	Power Cord, Taiwan, C13,12A , 1.83m	1 each	AF561A
	Power Cord, China, C13,10A 1.83,,	1 each	AF557A
	Power Cord, Japan, C13,12A , 2m	1 each	AF572A
	Power Cord, Australia, C13,10A , 2.5m	1 each	AF569A
	Power Cord, Argentina, C13,10A , 2.5m	1 each	AF558A
	Power Cord, Brazil, C13,10A , 1.83m	1 each	AF559A
	Power Cord, Korea, C13,10A , 1.83m	1 each	AF560A

Configuration Information

Power Cord, Israel, C13,10A , 1.83m	1 each	AF564A
Power Cord, India, C13,10A , 2.0m	1 each	AF562A

NOTE: One power cord is required; there is no power cord included in the box with the 1/8 G2 Tape Autoloader. Please select the correct power cord for your geographical location.

WARNING: This product can ONLY be used with an HP approved power cord for your specific geographic region. Use of a non-HP approved power cord may result in: 1) not meeting individual country specific safety requirements; 2) insufficient conductor ampacity that could result in overheating with potential personal injury and/or property damage; and 3) an unapproved power cord could fracture resulting in the internal contacts being exposed, which potentially could subject the user to a shock hazard. HP disclaims all liability in the event a non-HP approved power cord is used.

Related Options

Factory Racking	<p>Factory integrate the 1/8 G2 Tape Autoloader with other HP products such as HP ProLiant Servers.</p> <p>NOTE: #0D1 will appear after the 1/8 G2 Tape Autoloader part number on the sales order if HP factory integration is indicated.</p> <p>HP Factory Rack mount Shelf Kit</p> <p>NOTE: Required to safely ship the 1/8 G2 Tape Autoloader via the factory integration option (#0D1); shelf can be removed after the rack is received at the customer site.</p>	#0D1 AB469A
Rack Kit	<p>HP 1/8 G2 Tape Autoloader Rack Kit</p> <p>NOTE: Required to install the unit in a standard 19-inch rack; includes rails and rackmount instructions.</p>	AH166A
Rack-to-Tabletop Conversion Kit	<p>HP 1/8 G2 Rack-to-Tabletop Conversion Kit</p> <p>NOTE: For use in converting the rack-ready 1/8 G2 Tape Autoloader into a structurally rigid and fully enclosed tabletop model; maximum load up to 33 pounds (15 kilograms).</p>	AH199A
Magazine Kit	<p>HP 1/8 G2 Right Magazine Kit</p> <p>NOTE: For use only on the right side of the 1/8 G2 Tape Autoloader; additional 4-slot magazine.</p>	AH167A
Rack Cabinets	<p>10622 (22U) Universal Rack Cabinet - Shock Pallet</p> <p>10636 (36U) Universal Rack Cabinet - Shock Pallet</p> <p>10636 (36U) Universal Rack Cabinet with extension - Shock Pallet</p> <p>10642 (42U) Universal Rack Cabinet - Shock Pallet</p> <p>10642 (42U) Universal Rack Cabinet with extension - Shock Pallet</p> <p>NOTE: The 1/8 G2 Tape Autoloader is certified to ship in HP 10000 series racks which include a shock pallet. It is mandatory to use a shock pallet in order to ship racks with equipment installed.</p> <p>5642 (42U) Rack Cabinet</p> <p>NOTE: This rack ships unassembled and boxed on a standard size pallet. It is an industry standard 19" wide rack with side panels and rear doors; it does not ship with the front door or casters.</p> <p>NOTE: For additional HP ProLiant rack information, visit http://h18004.www1.hp.com/products/servers/proliantstorage/racks/index.html</p>	AF022A AF012A AF014A AF002A AF004A 358254-B21

Related Options

Media	HP Ultrium 800GB RW Data Cartridge (1 pack)	C7973A
	HP Ultrium 800GB WORM Data Cartridge (1 pack)	C7973W
	HP Ultrium 400GB Data Cartridge (1 pack)	C7972A
	HP Ultrium 200GB Data Cartridge (1 pack)	C7971A
	HP Ultrium Universal Cleaning Cartridge (1 pack)	C7978A
	HP Ultrium 3 RW Bar Code Labels (100 pack)	Q2007A
	HP Ultrium 3 WORM Bar Code Labels (100 pack)	Q2008A
	HP Ultrium 2 Bar Code Labels (100 pack)	Q2002A
	HP Ultrium 1 Bar Code Labels (100 pack)	Q2001A
	HP Ultrium 800GB RW Custom Labeled Data Cartridge (20 pack)	C7973AL
	HP Ultrium 800GB WORM Custom Labeled Data Cartridge (20 pack)	C7973WL
	HP Ultrium 800GB RW Non-Custom Labeled Data Cartridge (20 pack)	C7973AN
	NOTE: Non-custom labels will come pre-labeled with a pre-determined number sequence.	
	HP Ultrium 400GB Custom Labeled Data Cartridge (20 pack)	C7972AL
	HP Ultrium 400GB Non-Custom Labeled Data Cartridge (20 pack)	C7972AN
	NOTE: Non-custom labels will come pre-labeled with a pre-determined number sequence.	
	HP Ultrium 200GB Custom Labeled Data Cartridge (20 pack)	C7971AL
HP Ultrium 200GB Non-Custom Labeled Data Cartridge (20 pack)	C7971AN	
NOTE: Non-custom labels will come pre-labeled with a pre-determined number sequence.		
HP Ultrium 400GB Storage Media Kit	C8014A	
NOTE: Kit includes 20 HP Ultrium 400GB data cartridges, one HP Ultrium Universal Cleaning Cartridge, 20 colored labels, a protective carrying case that can be used to securely store or transport data cartridges, one copy of "The Essentials of Successful Tape Backup," and one copy of HP StorageWorks Data Protector Express Evaluation Software (60 day free trial).		
HP Ultrium 200GB Storage Media Kit	C8013A	
NOTE: Kit includes 20 HP Ultrium 200GB data cartridges, one HP Ultrium Universal Cleaning Cartridge, 20 colored labels, a protective carrying case that can be used to securely store or transport data cartridges, one copy of "The Essentials of Successful Tape Backup," and one copy of HP StorageWorks Data Protector Express Evaluation Software (60 day free trial).		
<hr/>		
Host Bus Adapters	Reference the EBS compatibility matrix for the most up-to-date SCSI HBA compatibility information at http://www.hp.com/go/ebs	
<hr/>		
Cable Kits	6 ft VHDCI/HDTS68 SCSI Cable Kit	341176-B21
	2M External Infiniband (SFF8470) to Mini SAS (SFF8088) 1x SAS Cable Kit	AE466A
<hr/>		

Related Options

HP Care Pack Options

Same Day Response

Warranty upgrade to 1-year, 13x5, 4 hour response/onsite, electronic	U6364E
Warranty upgrade to 1-year, 24x7, 4 hour response/onsite, electronic	U6365E
Warranty upgrade to 1-year, 24x7, call-to-repair, 6 hour response/onsite, electronic	U6366E
Warranty upgrade to 3-year, 13x5, 4 hour response/onsite, electronic	H5526E
Warranty upgrade to 3-year, 24x7, 4 hour response/onsite, electronic	H4624E
Warranty upgrade to 3-year, 24x7, call-to-repair, 6 hour response/onsite, electronic	U6367E
Warranty upgrade to 5-year, 13x5, 4 hour response/onsite, electronic	U9376E
Warranty upgrade to 5-year, 24x7, call-to-repair, 6 hour response/onsite, electronic	U9377E

Next Business Day Response

Warranty upgrade to 3-year next business day/parts exchange, electronic	H2698E
Warranty upgrade to 3-year next business day/onsite, electronic	H4619E

Hardware Services

Installation services, electronic	U2090E
-----------------------------------	--------

NOTE: In order to maximize ROI and product uptime, and minimize the cost of ownership, Hewlett-Packard recommends the 3-year, 24 x 7 service options. These offerings will ensure that any product issue can be tackled when they occur (most back up issues will occur outside standard business hours) and that the service coverage regarding period, covers the minimum expected life of the host system.

Technical Specifications

	1/8 G2 Ultrium 920 Tape Autoloader	1/8 G2 Ultrium 448 Tape Autoloader	1/8 G2 Ultrium 232 Tape Autoloader
Drive Technology	Ultrium 920	Ultrium 448	Ultrium 232
Number of Drives	1	1	1
Number of Slots	8	8	8
Capacity	3.2 TB native 6.4 TB compressed	1.6 TB native 3.2 TB compressed	800 GB native 1.6 TB compressed
Maximum Transfer Rate	60 MB/s (216 GB/hr) native 120 MB/s (432 GB/hr) compressed	24 MB/s (86.4 GB/hr) native 48 MB/s (172.8 GB/hr) compressed	16 MB/s (57.6 GB/hr) native 32 MB/s (115.2 GB/hr) compressed
Interface	3Gb/sec SAS Ultra320 SCSI LVD/SE	Ultra160 SCSI LVD/SE	Ultra160 SCSI LVD/SE

Dimensions	Out-of-Box (HxWxD)	1.7 x 19 x 31.9 in (4.4 x 48.2 x 80.9 cm)
	Shipping (HxWxD)	10 x 23 x 39 in (25 x 58 x 99 cm)
Weight	Out-of-Box	25.4 lb (11.5 kg)
	Shipping	33.7 lb (15.3 kg)
Reliability	MSBF (mean swaps between failures)	2,000,000 robot load/unload cycles
	MTBF (mean time between failures)	100,000 hours (based on 1M MSBF)
Cartridge Swap Time		34 seconds average (drive to slot, slot to drive)
Initialization Time		76 seconds
Inventory Time		52 seconds (with bar code labeled cartridges)
Connectors		(1) Mini-SAS (located on back of 1/8 G2 SAS model) (2) HD68 (located on back of 1/8 G2 SCSI models) (1) RJ-45 (located on back of 1/8 G2) (1) USB port (diagnostic only; located on back of 1/8 G2)
LED Indicators (on front panel)		Ready LED (Green): shows ready status information Clean LED (Amber): shows fault status information Attention LED (Amber): shows fault status information Error LED (Amber): shows fault status information
Power		100 to 240 VAC, 50 to 60 Hz
Input Requirements		110 to 240 VAC, 50 to 60 Hz
Relative Humidity (non-condensing)	Operating	20% to 80%
	Shipping	20% to 90%
Temperature Range (wet bulb)	Operating	50° to 95° F (10° to 35° C)
	Shipping	-40° to 140° F (-40° to 60° C)
Altitude	Operating	10,000 ft (3,048 m)
	Shipping	35,000 ft (10,668 m)

Technical Specifications

© Copyright 2007 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.