





1 Download and install the latest DisplayLink drivers at [www.elotouch.com/support](http://www.elotouch.com/support).

Note: DisplayLink driver installation requires another display to be functioning during driver installation because the 0702L will not function without the drivers installed.




2 Connect the micro USB cable. Ensure the rubber gasket (red) is all the way inside the cable cover area.



3 Install the cable cover by installing the top side first and rotating it down. Secure the door with the M3 screw included.



4 Monitor can be mounted to any standard 75mm x 75mm VESA mounting bracket using four M4x8mm screws.

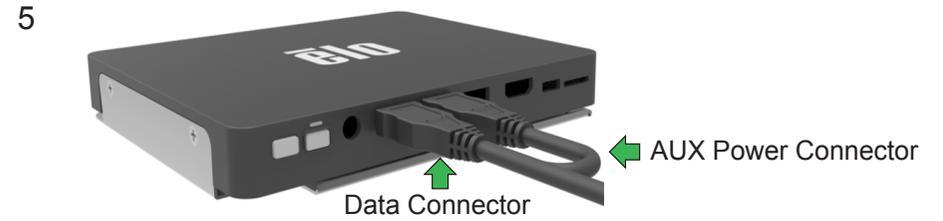

5 Connect the Data Connector of the Y-Cable to the host PC USB port. Note: Some computers also require connecting the AUX Power connector to the host PC.

Go to [www.elotouch.com/support](http://www.elotouch.com/support) to download user manual.

请访问 [www.elotouch.com.cn](http://www.elotouch.com.cn) 获取用户手册 请保留备用