

DATASHEET

FUJITSU SL27T-1 LED DISPLAY

ADVANCED DISPLAY: 68.6 CM (27-INCH) WIDESCREEN
LIFESTYLE DESIGN AND ADVANCED ENTERTAINMENT FEATURES

The SL27T-1 LED offers XXL screen size for office and universal entertainment. It is the most energy efficient in its class, without compromising picture quality. Thanks to its high functionality it works with both IT and consumer electronics. This makes the display ideal for presentation areas as well as for multimedia applications at home.

Widescreen display with LED backlit panel in optimum 16:9 movie format

1920 x 1080 maximum resolution for ultimate entertainment and work experience


3 ms fast response time for internet, office, gaming and more

Touch sensor keys for smart adjustments

2 x HDMI, D-Sub for high flexibility

< 1W/inch typical power consumption and Energy Star compliant

Due to integrated speakers no further accessories needed

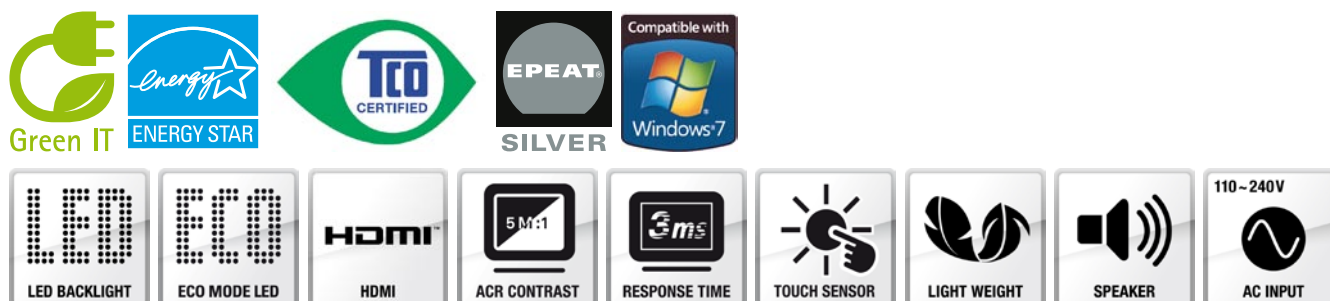

TECHNICAL DETAILS

SPECIAL FEATURES

LED backlit panel, 6 + 1 touch sensor keys, ECO Status LED: 3 colors for 3 modes, keep aspect ratio option

STAND DETAILS

Stand	removable
Picture height over desk (min)	79.5 mm
Tilt angle	- 5° / + 15°

PICTURE PERFORMANCE

Contrast - typical	1000:1
Contrast - advanced	5,000,000:1
Response time typical	5 ms
Response time gray to gray typical	3 ms
Viewing angle (h/v) - typical	176° / 170°
Color performance	16.7 million colors (Hi-FRC)
Brightness - typical	250 cd/m²

SIZE AND RESOLUTION

Aspect ratio	16:9
Diagonal Size	68.6 cm (27-inch)
Resolution (native)	1920 x 1080 pixel (recommended)
Resolution (interpolated)	1680 x 1050 pixel, 1440 x 900 pixel, 1366 x 768 pixel, 1280 x 1024 pixel, 1280 x 720 pixel, 1024 x 768 pixel, 800 x 600 pixel, 720 x 400 pixel, 640 x 480 pixel
Video modes	1080i/p, 720i/p, 576i/p, 480i/p
Picture size	597.9 x 336.3 mm
Pixel Pitch	0.311 mm

FREQUENCIES

Horizontal analog	31 kHz to 82 kHz
Horizontal digital	15 kHz to 82 kHz
Vertical	56 - 76 Hz
Frequencies - bandwidth	225 MHz

CONNECTIVITY

Video Input	2 x HDMI 1 x D-SUB
Audio sound output	2 x 3 W
Audio signal input	3.5 mm stereo phone jack
Audio signal output	S/PDIF (optical)
HDMI audio	Yes

OSD LANGUAGES AND SETTING OPTIONS

Languages	Arabic, Czech, Danish, Dutch, English, Finnish, French, German, Italian, Japanese, Norwegian, Polish, Portuguese, Russian, Spanish, Swedish, Turkish
Brightness / Contrast	Brightness, Contrast, Black level, Auto level
Color	6500K, 7500K, 9300K, Native, sRGB, Custom Color
Image adjust	H-Position, V-Position, Sharpness, Clock, Phase
Audio	Mute, Volume
Information	Resolution/mode, Signal input
Mode	General, Movie, Picture, Game

POWER CONSUMPTION (TYPICAL, W/O SOUND)

Soft switch off	0.33 W
Power save mode	0.37 W
Operating with EPA settings	29.2 W
Operating maximum brightness	40 W

ELECTRICAL VALUES

Rated voltage range	100 - 240 V
Rated frequency range	50 - 60 Hz
Protection class	1

COMPLIANCE

Europe	CE, TCO Displays 5.0
USA/Canada	FCC Class B, cUL
Russia	GOST
Saudi Arabia	SASO
Global	ENERGY STAR® 5.0, ISO9241-307 (Pixel fault class I), IT-Eco-Declaration, RoHS, WEEE
Compliance link	https://sp.ts.fujitsu.com/sites/certificates/default.aspx

QUALITY AND RELIABILITY

MTBF (demonstrated)	50.000 h
----------------------------	----------

DIMENSIONS / WEIGHT / ENVIRONMENTAL

Dimension without stand (W x D x H)	642 x 67 x 391.3 mm
Dimension with stand (W x D x H)	642 x 209.9 x 437.9 mm
Weight (packed)	7.66 kg
Weight (unpacked)	6.2 kg
Operating ambient temperature	5 - 40°C

MISCELLANEOUS

VESA DDC/ CI, Standardized mounting interface VESA FP MP MI 100 mm, Kensington lock

PACKAGE CONTENT

Data cable 1.8m, D-SUB (15-pin), Audio cable 1.8m, Power cable for wall socket (Euro-Schuko-Type CEE7) 1.8m, User manual, Warranty booklet, Quickstart flyer

Data cables and audio cable detachable on display

ORDER INFORMATION

Order Code	S26361-K1369-V160
EAN-No.	4049699293214

WARRANTY

Service level	(depending on country)
Service Weblink	http://ts.fujitsu.com/Supportservice

FUJITSU PLATFORM SOLUTIONS

In addition to Fujitsu SL27T-1 LED, Fujitsu provides a range of platform solutions. They combine reliable Fujitsu products with the best in services, know-how and worldwide partnerships.

Dynamic Infrastructures

With the Fujitsu Dynamic Infrastructures approach, Fujitsu offers a full portfolio of IT products, solutions and services, ranging from clients to datacenter solutions, Managed Infrastructure and Infrastructure-as-a-Service. How much you benefit from Fujitsu technologies and services depends on the level of cooperation you choose. This takes IT flexibility and efficiency to the next level.

Computing Products

www.fujitsu.com/global/services/computing/

Software

www.fujitsu.com/software/

MORE INFORMATION

Learn more about Fujitsu SL27T-1 LED, please contact your Fujitsu sales representative or Fujitsu Business partner, or visit our website. <http://ts.fujitsu.com>

FUJITSU GREEN POLICY INNOVATION

Fujitsu Green Policy Innovation is our worldwide project for reducing burdens on the environment. Using our global know-how, we aim to resolve issues of environmental energy efficiency through IT. Please find further information at <http://www.fujitsu.com/global/about/environment/>



COPYRIGHTS

All rights reserved, including intellectual property rights. Technical data subject to modifications and delivery subject to availability. Any liability that the data and illustrations are complete, actual or correct is excluded. Designations may be trademarks and/or copyrights of the respective manufacturer, the use of which by third parties for their own purposes may infringe the rights of such owner. For further information see http://ts.fujitsu.com/terms_of_use.html
Copyright © Fujitsu Technology Solutions

DISCLAIMER

Technical data are subject to modification and delivery subject to availability. Any liability that the data and illustrations are complete, actual or correct is excluded. Designations may be trademarks and/or copyrights of the respective manufacturer, the use of which by third parties for their own purposes may infringe the rights of such owner

CONTACT

FUJITSU Technology Solutions
Website: <http://ts.fujitsu.com>
2010-08-27 CE-EN