


PIN OUT	
P1	P2
1	1
2	2
3	3
4	4
5	5
3	3
9	9
10	10
11	11
12	12
13	13
11	11
17	17
18	18
19	19
20	20
21	21
19	19
23	23
24	24
22	22
6	6
7	7
14	14
15	15
16	16
SHELL	D+B
	SHELL

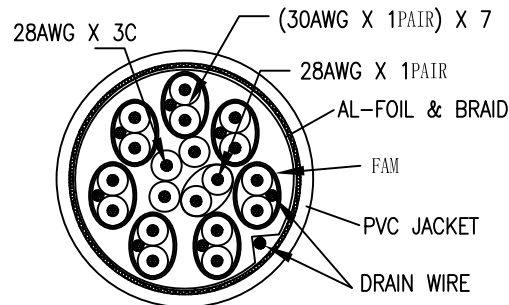

- NOTES:
- ELECTRICAL PROPERTIES:
    - 100% OPEN AND SHORT TEST
    - CONDUCTOR RESISTANCE: 5 OHMS
    - INSULATION RESISTANCE: 10 MEGOHMS
    - HI-POT: DC300V/0.01S
    - 100% HDTV, BLUE RAY DVD TEST(1080P:UP TO 7M); (1080I: 10M,15M)
    - ALL CABLE PRODUCTION PROCESS ARE CONTROLLED BY ATC TEST DEVICE.
  - ALL MATERIAL BE RoHS COMPLIANT.

⑧	TAG	1PCS	DELTACO TAG
⑦	CORE MOLD	2PCS	BLACK PVC
⑥	CORE	2PCS	OD*ID*L: 17.5*10.5*28.5mm
⑤	SCREW	1PCS	#4-40 UNC, HOOD MOLDED: BLACK PVC
④	DVI HOOD	2PCS	BLACK PVC
③	DVI(24+1)F	1PCS	GOLD PLATED SHELL, WITH COLD SCREW NUT
②	DVI(24+1)M	1PCS	GOLD PLATED SHELL
①	CABLE	1PCS	(30AWG*1P+D+FAM)*7+28AWG*1P+28AWG*3C +AEB OD:8.6mm BLACK PVC JACKET
NO.	PARTS NAME	Q'TY	SPECIFICATION

APPROVED	CHECKED	DRAWN	CUSTOMER:
			ITEM NO. DVI-602A
			DRAW NO.
			UNIT mm
			SCALE NONE

DESCRIPTION:

DVI(24+1)/M-DVI(24+1)/F

