

LUT5 3000nit TOUCH·3D LUT

5.5" DAYLIGHT VIEWABLE FIELD MONITOR


Sony F970 External Install and Power Kit



- 5.5"**
3000nit Light Sensor
- 1920x1200**
FHD Resolution
- Touch Screen**
- 3D LUT**
Custom 3D LUT
- HDR**
HDR Monitoring
- 4K HDMI**
4K HDMI In & Out
- External Install and Power Design**
- DC OUT**
Power for Camera





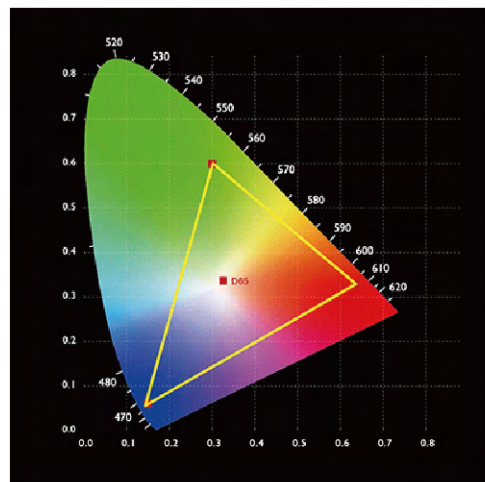









USE PROFESSIONAL REC.709 COLOR CALIBRATION STANDARD



FEATURES

- 5.5-inch 1920x1080 full HD IPS screen
- Touch screen menu operation, improve shooting efficiency
- Ultra-bright 3000nit, clearly visible in the sun
- Light sensor auto dimming
- Supports 3D LUT Log to REC.709 and user 3D LUT upload
- Supports HDR monitoring, what you see is what you get
- Sony F970 external install and power kit design can be used to install and supply power to external equipment, easy to install and disassemble, simplify your photography equipment.
- With Waveform, Vectorscope, RGB Histogram, Focus Assist, Monochrome etc. functions, can help you accurately exposure and focus every shot.
- Stereo Earphone output
- DC 8V power out to power your DSLR camera or mirrorless camera

PROFESSIONAL AND RICH AUXILIARY FUNCTIONS

- | | | | | | |
|---|---|--|---|--|---|
|  3D LUT |  Waveform |  Vector Scope |  Histogram |  Anamorphic Mode |  Peaking Filter |
|  False Colors |  Exposure |  Zoom-in |  Image Flip |  Embedded Audio |  Nine Grid |

SD card slot import LUT



Flexible power supply mode
Sony F970 external power and install kit



R970

Sony F970 外挂供电套件





DC 12V

>> PARAMETER

| | |
|--------------------------------------|---|
| Model | LUT5 |
| Screen size | 5.5" IPS |
| Display Colors | 16.7M (8 bit) |
| Resolution | 1920x1080 pixels |
| Dot pitch | 0.069(L) x 0.069(W) (mm) |
| Aspect Ratio | 16:9 |
| Brightness | 3000cd/m2 |
| Contrast | 1000:1 |
| Backlight | LED |
| Response Time | Ton+Toff=35ms |
| Viewing Angle | 80°/80°(L/R) 80°/80°(U/D) |
| Input | HDMI |
| Output | HDMI |
| Power Out | DC OUT 8V, Barrel (5.5mm outer, 2.1mm inner; Power DSLR or mirrorless camera) |
| Audio | 3.5mm Stereo Headphone |
| HDMI Input/ Output Support Format | 480i/576i/480p/576p |
| | 720p (60/59.94/50/30/29.97/25/24/23.98) |
| | 1080i (60/59.94/50) |
| | 1080p (60/59.94/50/30/29.97/25/24/23.98) |
| | 3840×2160p (30/29.97/25/24/23.98) |
| | 4096×2160p (30/29.97/25/24/23.98) |
| Power Consumption | ≤ 20W |
| Input Voltage | DC7 ~24V |
| Power Connector | DC |
| Battery Plate | F970 Battery Plate |
| Operating Temperature | -20°C ~ 70°C |
| Storage Temperature | -30°C ~ 80°C |
| Install Way | 1/4"-20 Thread Point (Right, Bottom) |
| Unit Size | 142Lx86Hx28D (mm) |
| Unit Weight | 270g |

>> STRUCTURE

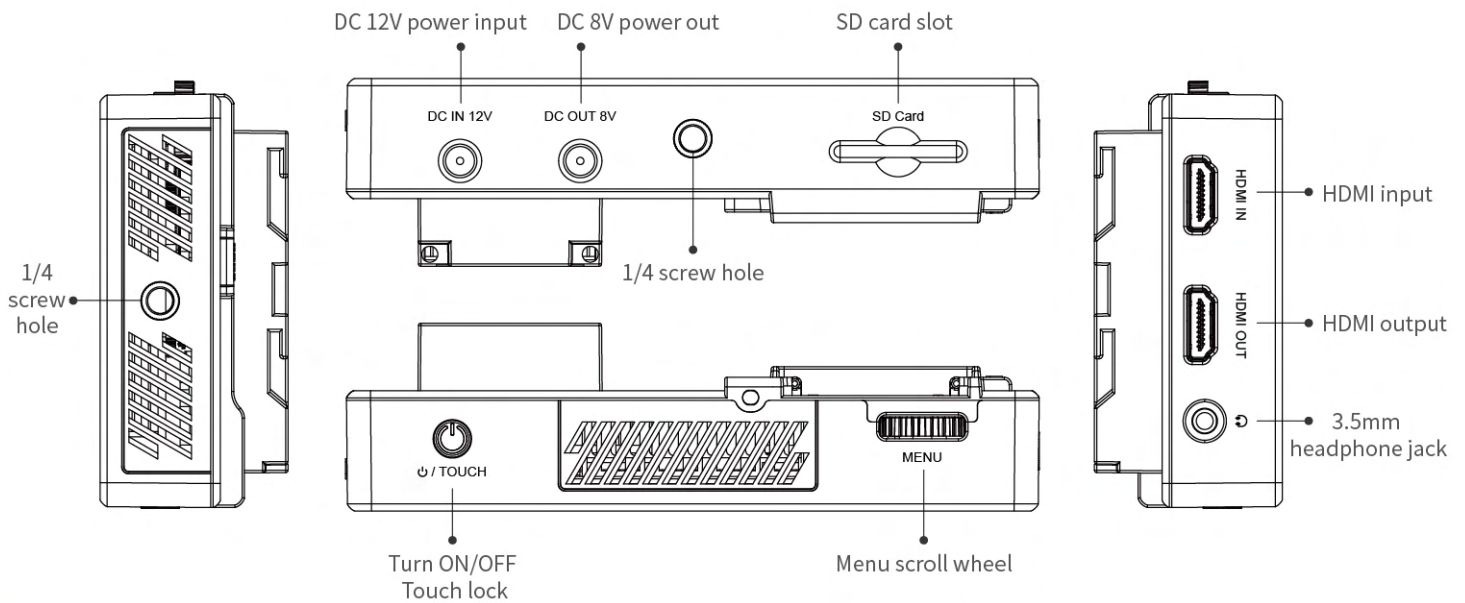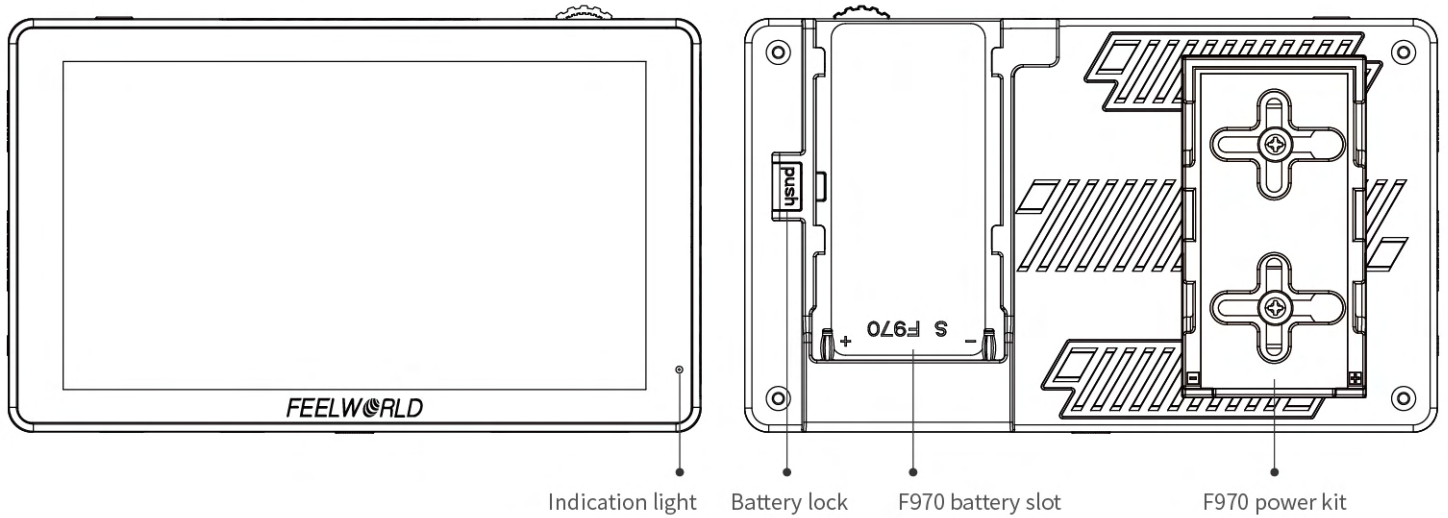

>> PACKING LIST

| | | | |
|--|---|--|--|
|  <p>Monitor</p> |  <p>Micro HDMI cable</p> |  <p>Mini hot shoe mount + Hex wrench</p> |  <p>User manual</p> |
|--|---|--|--|



Zhangzhou Seetec Optoelectronics Technology Co., Ltd

E-mail: sales@feelworld.cn

Tel: +86-596-2672627

Website: www.feelworld.com.cn

Fax: +86-596-2672617

www.seetec.com.cn