



EV2485-BK

Your advantages

For state-of-the-art connectivity, the EIZO FlexScan EV2485 uses USB-C upstream, DisplayPort and HDMI inputs as well as four USB downstream ports. The 24-inch display in 16:10 format receives image signals, audio and USB data via its USB-C interface and supplies connected devices with power via USB. This convenient multi-purpose connectivity simplifies quick laptop connection when switching between workstations or hybrid working. The EV2485 is energy-efficient, ergonomic and reliable, with impressive picture quality. It has a virtually frameless design for a refined aesthetic. The housing is available in elegant black or white. Matching cables are available in the respective housing colour. Operating controls, the brightness sensor and speakers are integrated into the narrow front panel. The EV2485 can be rotated, swivelled and tilted in a way that is most comfortable for the users back, neck and preferred sitting position. The EV2485's IPS LCD has a resolution of 1920x1200 pixels and allows for the widest viewing angles. The maximum brightness typical of the model is 350 cd/m2. Anti-reflective coating and Auto-EcoView brightness control create a glarefree view, while sophisticated hybrid control of the LCD backlight ensures flicker-free viewing.

- 24" monitor with 16:10 aspect ratio and IPS technology for outstanding image quality
- USB-C port with DisplayPort signal channel and 70watt power supply (max.) for the perfect connection
- Bezel only 1 mm: amazingly compact and ultra-elegant design
- Flicker-free image reproduction thanks to hybrid brightness control
- Auto EcoView and EcoView Optimizer delivers maximum power savings and superb ergonomics
- Optimised antireflection properties and flexible positioning
- USB 3.1 hub with one USB-C upstream and four USB-A downstream ports
- Signal inputs: USB-C (DisplayPort Alt Mode), Display-Port, HDMI
- Proven manufacturing process that is both environmentally friendly and socially responsible



Cutting-edge connectivity with USB-C

A single USB-C cable is all that is needed to provide video and audio reproduction, transfer data quickly and supply power to the connected devices. The 70 W power supply via USB-C is highly practical and can reliably charge small computers or laptops. This creates more space on your desk since you no longer need an additional power supply for your computer.




One monitor, many ports

It doesn't get simpler than this: Most end devices, such as PCs, laptops and cameras, can be connected directly to the monitor, thanks to its wide range of signal interfaces. The screen also features four USB type A 3.1 ports. This allows different devices such as mice, keyboards and headsets to be connected. This makes your everyday work easier and guarantees a tidy desk.



Elegant design

The monitor's appearance can be the key to creating a pleasant working atmosphere. Whether you are at home or in the office, the monitor's virtually frameless design and ergonomic functionality allows it to fit naturally into your workplace environment. The housing is available in both an elegant black and in white, with matching white cables.

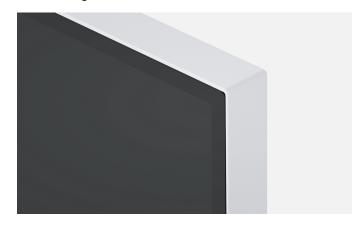

Controls integrated into bezel


Electrostatic switches are integrated into the front of the EV2485-BK instead of mechanical buttons. This ensures ease of use while also giving the monitor an extremely elegant look. The speakers and all the controls are also built into the bezel, pointing forward in the direction of the user. They are fully integrated into the monitor's flat, nearly frameless design to offer an excellent user experience.





Maximum image quality thanks to the IPS panel

The monitor is capable of all three key elements of excellent image quality: excellent resolution of 1920×1200 pixels, maximum contrast of 1000:1, and stable brightness of up to 350 cd $/m^2$. That means you will experience razor-sharp text contours, brilliant graphics, and clear images. Thanks to the high-quality IPS panels with LED backlight, contrasts and colours remain stable from every viewing angle.

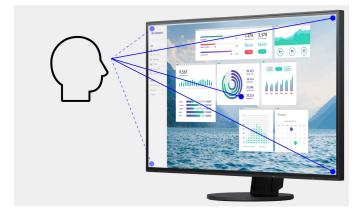

Precise colour control

An image can only be perfect if the colours are, too. This is why EIZO office monitors have a 10-bit look-up table at a minimum, which allows the colour information to be assigned much more precisely than with conventional 8-bit LUTs. The finest colour gradations ensure that gradients are always perfectly displayed, while also offering customised adjustment options. For example, you can adjust the white balance from 4000 K to 10000 K in 500-K intervals.



Look-Up-Table with 10 and more bit



Look-Up-Table with 8 bit

Overdrive to quickly change images

Fast, faster, overdrive. The overdrive function accelerates switching time so that the grey-grey change takes only 5 ms on average. You can watch films and rapidly changing images without annoying afterglow.



Without overdrive: streaking and time delay

Save electricity and your eyes with Auto EcoView

At day, at night, bright, dark: No matter when and how you work, the Auto EcoView function continuously measures changes of the ambient light and optimises the monitor with ideal brightness values automatically by using a sensor. The benefits: Annoying glare is reduced, your eyes will not get tired as quickly. A special two-point control takes into account the brightest and darkest environment over the course of the day with the respectively desired screen brightness. Another advantage: Thanks to the automatic brightness adjustment, you will save up to 50% of your electricity costs in comparison to a monitor that is permanently operated at maximum brightness.

Of course, you can also continue to configure the monitor manually. EcoView Index is used for orientation on how environmentally friendly and economical your settings are.



During the day



In the evening



Flicker free: for the sake of the eyes


To help protect your eyes, EIZO has developed a hybrid technology to control the backlight. This combines the benefits of the otherwise standard PWM (pulse width modulation) and DC (direct current) control. The PWM control uses much higher frequencies than standard PWM methods. The result: a flicker-free viewing experience. Flickering is reduced down to absolute freedom from flickering, without impairing image quality or colour stability. In addition, the brightness can be set to less than 1% of the maximum value in darkly lit rooms. The benefit: Your screen remains free from glare even under these conditions.

EIZO FlexScan monitors are certified by TÜV Rheinland as flicker-free, emitting low quantities of blue light.

Why do we experience eye fatigue when using a computer? EIZO has the answers.


Anti-glare coating: more image, less reflection

The EV2485-BK offers a perfect, non-glare surface. By minimising glare by diffusing the reflected light, the EV2485-BK effectively protects your eyes from straining. This keeps your eyes from getting as tired and allows you to sit comfortably in front of the screen, without having to sit in a forced position to prevent glare.




Flexible base

Ergonomic and stable: the adjustable stand focuses on ergonomics. You can rotate, swivel and tilt the monitor stand until you find the most comfortable setting for your back, neck and sitting posture. It features continuous height adjustment and can be lowered almost to the base plate of the stand, enabling you to position the top image line ergonomically right below your eye level.

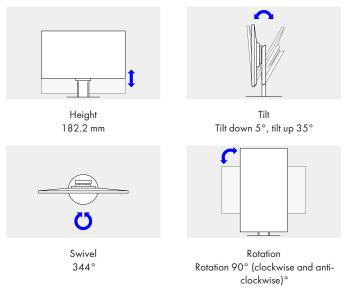

Preset colour modes: Optimised display at the press of a button


Preset colour modes make it easier for you to work and view images, texts and videos. This is because when choosing colour settings, it makes a difference whether you are looking at a film, editing an image, surfing the Internet or writing texts. You can configure the respective default settings for brightness, gamma correction and colour temperature at the press of a button. For example, paper mode simulates the pleasant contrast of books by reducing the blue light portion and brightness. This reduces wear on your eyes when reading documents and prevents tiredness.





Monitor Configurator for cross-network settings

Reduced workload for network administrators: The software allows you to configure multiple monitors uniformly in a single step - via a USB connection. This saves you time and ensures you have the same settings on all screens. The configuration can be saved as an XML file and transferred to clients.

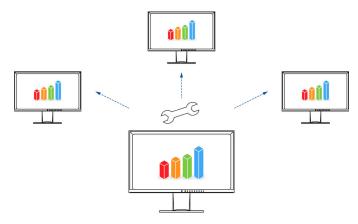

Operation made easy thanks to the Button Guide

The Button Guide provides all functions at a glance. Touching the button is enough and the screen will show all functions and the corresponding control panel.



Save up to 30% of energy with the EcoView Optimizer

Save electricity without compromising quality: The EcoView Optimizer reduces the background lighting fully automatically for dark images. This reduces electricity consumption by up to 30%. At the same time, the signal is amplified and the colour tone values adjusted. The result: You will enjoy the image quality you are used to but consume less power.



Screen InStyle

In addition to the on-screen menu, you can conveniently control the EV2485-BK by using the Screen InStyle software on a Windows PC. The configuration options include colour reproduction, energy saving options, and ergonomic functions that allow you to reduce the blue light portion (Circadian Dimming). The Screen InStyle software allows the user to apply the settings to all connected screens when using a multi-screen system.

More about Screen InStyle

Screen InStyle Server is a server application that allows system administrators to centrally manage and control monitors on which Screen InStyle is installed and which are connected to the network. This optimises power consumption and simplifies monitor asset management.

More about Screen InStyle Server



Zero-watt consumption thanks to the power switch

The monitors have an integrated mechanical power switch, which is extremely practical and energy-saving: If you switch off the monitor using the power switch, the device will stop consuming any power at all. Moreover, it consumes a maximum of 0.5 watt in standby mode.



Socially responsible production

The EV2485-BK is produced in a socially responsible way. It is free of child labour and forced labour. Suppliers along the supply chain have been carefully selected and they have also committed themselves to produce in a socially responsible way. This applies in particular to conflict minerals. We present a detailed report about our social responsibility annually and voluntarily.

Read more about our corporate social responsibility



Environmentally and climate friendly

Each EV2485-BK is manufactured in our own factory, which implements an environmental management system in accordance with ISO 14001. This includes measures to reduce waste, wastewater and emissions, resource and energy consumption, as well as to encourage environmentally conscious behaviour among employees. We publicly report on these measures on an annual basis as a main component of our CSR report.



Sustainable and durable

The EV2485-BK is designed for a long service life that takes into account the entire lifecycle and impact on the environment. It is generally well above the five-year guarantee. Spare parts are available up to five years after the end of production. The monitor's long service life and the ability to repair it save resources and the climate. When designing the EV2485-BK we paid attention to reducing resource consumption by using high-quality components and materials and being meticulous in production. The packaging of the EV2485-BK consists of cardboard box made of 85% recycled paper, while the transport padding is even 100% recycled plastic.





A natural beauty

Reducing the use of volatile organic compounds (VOCs) found in material production, such as some paints, is a global concern.

EIZO uses its expertise cultivated from extensive years of research to manufacture its monitor cabinets with a smooth, uniform colour and texture without using paint.





Compliance with standards and guidelines

The monitor is certified according to important and all-encompassing sustainability standards such as TCO Certified Generation 8, EPEAT and Energy Star. The EV2485-BK is a safe investment, when taking into account issues such as ESG (Environmental, social and corporate governance) or SDG (Sustainable Development Goals) from the United Nations and following the necessary guidelines.

Examples of compliance at EIZO include:

- Safe use of chemicals in cable insulation
- Comprehensive information transparency after servicing for the entire product lifecycle
- Safe management of chemicals throughout the entire production process.
- Appropriate work time management for employees.
- Anti-corruption management system
- Responsible procurement of minerals
- Disclosure of information on energy management



General		Electric data	
ltem no.	EV2485-BK	Frequency	USB-C: 31-76 kHz/59-61 Hz, DisplayPort: 31-76 kHz
Case color	Black		59-61 Hz, HDMI: 31-76 kHz/ 49-51 Hz/49-61 Hz
Areas of application	Office, Gaming	Power consumption (typical) [in watt]	12
Product line	FlexScan	Maximum Power Consumption [in	146 (at maximum brightness with all signal inputs and U
EAN	4995047062561	watt]	ports in use)
Variants	EV2485-WT (Colour: White)	Power Save Mode [in watt]	0.5
Varianis		Power consumption off [in watt]	0
		Energieeffizienzklasse	C
Display		Energy consumption/1000h [in kWh]	12
Screen size [in inches]	24.1	Power supply	AC 100-120 V / 200-240 V, 50/60 Hz
Screen size [in cm]	61.1	Power management	\checkmark
Format	16:10		
Viewable image size (width x height)	518 x 324	Dimensions & weights	
Ideal and recommended resolution	1920 × 1200	Dimensions & weights	
Pixel pitch [mm]	0.270 × 0.270	Dimensions [mm]	531 x (356 - 538) x 230
Pixel density [ppi]	94	Weight [in kilograms]	7.6
		Dimensions without stand [mm]	531 x 344 x 54
Resolution supported	1920 x 1200, 1680 x 1050, 1600 x 1200, 1280 x 1024, 1024 x 768, 800 x 600, 720 x 400, 640 x 480	Weight without stand [in kilograms]	4.9
Panal tashnalagu	IPS	Housing dimension details	Dimension drawing (PDF)
Panel technology		Swivel	344 °
Max. viewing angle horizontal	178 °	Incline forward/backward	5 ° / 35 °
Max. viewing angle vertical	178°	,	•
Number of colours or greyscale	16.7 million colours (USB-C, 8 Bit), 16.7 million colours	Pivot	✓ 90° (clockwise and anti-clockwise)
	(display port, 8 Bit), 16.7 million colours (HD-D, 8 Bit)	Height adjustment range [mm]	182.2
Colour palette/look-up table	More than 1.06 billion hues/14-bit	Hole spacing	VESA standard 100 x 100 mm
Max. colour space (typical)	sRGB		
Max. brightness (typical) [in cd/m²]	350	Certification & standards	
Max. dark room contrast (typical)	1000:1	Certification	CB, CE, TCO certified 8.0, EPA Energy Star, TÜV/GS,
Typical response time [grey/grey alternation]	5 ms	Cernication	TÜV/Ergonomics (including ISO 9241-307), TÜV/Blu Low Light Content, TÜV/Flicker Free, EPEAT 2018 (US
Max. refresh rate [in hertz]	60		cTÜVus, TÜV/S, EAC, PSE, FCC-B, CAN ICES-3 (B),
Backlight	LED		RCM, VCCI-B, CCC, China RoHS, RoHS, WEEE
-			
Features & control		Software & accessories	
USB-C docking	\checkmark	Accompanying software and other ac-	Screen InStyle (free of charge)
Preset colour/greyscale modes	sRGB, Paper, DICOM, Movie, 2x free modes for user selection	cessories are available for download Additional supply	Power cord, Signal cable USB-C – USB-C (5 A), Quick
DICOM tone curve	\checkmark		guide, Cable protection
		Accessories	HH200PR-K (HDMI (High Definition Multimedia Interfo
RadiCS application classes	VIII	Accessories	
		Accessories	cable), PM200-K (DisplayPort cable to transfer digital
RadiCS application classes Auto EcoView EcoView Index	✓	Accessories	cable), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP100-K (Short DisplayPort
Auto EcoView EcoView Index	✓ ✓	Accessories	cable), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP100-K (Short DisplayPort connection cable, 100 cm), PP200-K (DisplayPort cabl 200 cm), CC100-BK (Short USB-C port cable, 100 cm
Auto EcoView EcoView Index EcoView Optimizer	✓ ✓ ✓	Accessories	cable), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP100-K (Short DisplayPort connection cable, 100 cm), PP200-K (DisplayPort cable 200 cm), CC100-BK (Short USB-C port cable, 100 cm CP200-BK (USB-C to DisplayPort cable, 200 cm), PCS
Auto EcoView EcoView Index EcoView Optimizer Overdrive	 ✓ ✓ ✓ ✓ 	Accessories	cable), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP100-K (Short DisplayPort connection cable, 100 cm), PP200-K (DisplayPort cab 200 cm), CC100-BK (Short USB-C port cable, 100 cm CP200-BK (USB-C to DisplayPort cable, 200 cm), PCS 03-BK (Thin client mount for the stand EIZO FlexStand
Auto EcoView EcoView Index EcoView Optimizer Overdrive	 ✓ ✓ ✓ ✓ ✓ ✓ ✓ 	Accessories	cable), PM200-K (DisplayPort cable to transfer digital
Auto EcoView EcoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls	 ✓ ✓ ✓ ✓ 	Accessories	cable), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP100-K (Short DisplayPort connection cable, 100 cm), PP200-K (DisplayPort cabl 200 cm), CC100-BK (Short USB-C port cable, 100 cm CP200-BK (USB-C to DisplayPort cable, 200 cm), PCS 03-BK (Thin client mount for the stand EIZO FlexStand FlexStand 5), EIZO ScreenCleaner (for the best possibl
Auto EcoView EcoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls HDCP Decoder	 ✓ ✓ ✓ ✓ ✓ ✓ ✓ 		cable), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP100-K (Short DisplayPort connection cable, 100 cm), PP200-K (DisplayPort cab 200 cm), CC100-BK (Short USB-C port cable, 100 cm CP200-BK (USB-C to DisplayPort cable, 200 cm), PC2 03-BK (Thin client mount for the stand EIZO FlexStand FlexStand 5), EIZO ScreenCleaner (for the best possibl
Auto EcoView EcoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls HDCP Decoder Input signal identification	 ✓ ✓ ✓ ✓ ✓ ✓ ✓ 	Warranty	cable), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP100-K (Short DisplayPort connection cable, 100 cm), PP200-K (DisplayPort cab 200 cm), CC100-BK (Short USB-C port cable, 200 cm), PC2 03-BK (Thin client mount for the stand EIZO FlexStand FlexStand 5), EIZO ScreenCleaner (for the best possibl clean without scratching the monitor)
Auto EcoView EcoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls HDCP Decoder Input signal identification Built-in speakers	> > > > > >		cable), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP100-K (Short DisplayPort connection cable, 100 cm), PP200-K (DisplayPort cabl 200 cm), CC100-BK (Short USB-C port cable, 100 cm CP200-BK (USB-C to DisplayPort cable, 200 cm), PCS 03-BK (Thin client mount for the stand EIZO FlexStand FlexStand 5), EIZO ScreenCleaner (for the best possibl
Auto EcoView CcoView Index EcoView Optimizer Doverdrive No flickering thanks to hybrid controls HDCP Decoder nput signal identification Built-in speakers DSD language	✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓ ✓	Warranty	cable), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP100-K (Short DisplayPort connection cable, 100 cm), PP200-K (DisplayPort cab 200 cm), CC100-BK (Short USB-C port cable, 100 cm CP200-BK (USB-C to DisplayPort cable, 200 cm), PC 03-BK (Thin client mount for the stand EIZO FlexStand FlexStand 5), EIZO ScreenCleaner (for the best possibl clean without scratching the monitor)
Auto EcoView	> > > > > >	Warranty Warranty and service Terms *) Maximum of 30,000 hours of operation	cable), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP100-K (Short DisplayPort connection cable, 100 cm), PP200-K (DisplayPort cab 200 cm), CC100-BK (Short USB-C port cable, 200 cm), PCC 03-BK (Thin client mount for the stand ELZO FlexStand - FlexStand 5), ELZO ScreenCleaner (for the best possibl clean without scratching the monitor) 5 years warranty*
Auto EcoView EcoView Index EcoView Optimizer Doverdrive No flickering thanks to hybrid controls HDCP Decoder nput signal identification Built-in speakers DSD language Adjustment options	 de, en, fr, es, it, se Brightness, Contrast, Gamma, All EcoView functions, Colour saturation, Colour temperature, Resolution, Colour Mode, Colour tone, Overdrive, Volume, Audio source, Signal input, OSD language, Interpolation, Audio input 	Warranty Warranty and service Terms *) Maximum of 30,000 hours of operation	cable), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP100-K (Short DisplayPort connection cable, 100 cm), PP200-K (DisplayPort cab 200 cm), CC100-BK (Short USB-C port cable, 100 cm CP200-BK (USB-C to DisplayPort cable, 200 cm), PC3 03-BK (Thin client mount for the stand EIZO FlexStand FlexStand S), EIZO ScreenCleaner (for the best possibl clean without scratching the monitor) 5 years warranty*
Auto EcoView EcoView Index EcoView Optimizer DecoView Optimizer No flickering thanks to hybrid controls HDCP Decoder Input signal identification Built-in speakers DSD language Adjustment options Button Guide	 Image: Second Second	Warranty Warranty and service Terms *) Maximum of 30,000 hours of operation	cable), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP100-K (Short DisplayPort connection cable, 100 cm), PP200-K (DisplayPort cab 200 cm), CC100-BK (Short USB-C port cable, 100 cm CP200-BK (USB-C to DisplayPort cable, 200 cm), PC3 03-BK (Thin client mount for the stand EIZO FlexStand FlexStand S), EIZO ScreenCleaner (for the best possibl clean without scratching the monitor) 5 years warranty*
Auto EcoView EcoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls HDCP Decoder Input signal identification Built-in speakers OSD language Adjustment options Button Guide Integrated power unit	 Image: Contrast Common All EcoView functions, Colour temperature, Resolution, Colour Mode, Colour temperature, Resolution, Colour Mode, Colour tone, Overdrive, Volume, Audio source, Signal input, OSD language, Interpolation, Audio input (DisplayPort/HDMI) 	Warranty Warranty and service Terms *) Maximum of 30,000 hours of operation	cable), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP100-K (Short DisplayPort connection cable, 100 cm, PP200-K (DisplayPort cab 200 cm), CC100-BK (Short USB-C port cable, 100 cm CP200-BK (USB-C to DisplayPort cable, 200 cm), PCS 03-BK (Thin client mount for the stand EIZO FlexStand FlexStand S), EIZO StreenCleaner (for the best possibl clean without scratching the monitor) 5 years warranty*
Auto EcoView EcoView Index EcoView Optimizer Doverdrive No flickering thanks to hybrid controls HDCP Decoder Input signal identification Built-in speakers DSD language Adjustment options Button Guide Integrated power unit Ports	 With the second secon	Warranty Warranty and service Terms *) Maximum of 30,000 hours of operation	cable), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP100-K (Short DisplayPort connection cable, 100 cm), PP200-K (DisplayPort cab 200 cm), CC100-BK (Short USB-C port cable, 100 cm CP200-BK (USB-C to DisplayPort cable, 200 cm), PC3 03-BK (Thin client mount for the stand EIZO FlexStand FlexStand S), EIZO ScreenCleaner (for the best possibl clean without scratching the monitor) 5 years warranty*
Auto EcoView EcoView Index EcoView Optimizer Decoder Input signal identification Built-in speakers DSD language Adjustment options Builton Guide Integrated power unit Ports Bignal inputs	 V V<	Warranty Warranty and service Terms *) Maximum of 30,000 hours of operation	cable), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP100-K (Short DisplayPort connection cable, 100 cm), PP200-K (DisplayPort cab 200 cm), CC100-BK (Short USB-C port cable, 100 cm CP200-BK (USB-C to DisplayPort cable, 200 cm), PC3 03-BK (Thin client mount for the stand EIZO FlexStand FlexStand S), EIZO ScreenCleaner (for the best possibl clean without scratching the monitor) 5 years warranty*
Auto EcoView CoView Index CoView Optimizer CoView Optimizer Coverdrive No flickering thanks to hybrid controls HDCP Decoder Input signal identification Built-in speakers DSD language Adjustment options Sutton Guide Integrated power unit Ports Signal inputs JSB specification	 Usb-C (DisplayPort Alt Mode, HDCP 1.3), DisplayPort (HDCP 1.3), HDMI (HDCP 1.4) USB-C (DisplayPort Alt Mode, HDCP 1.3), DisplayPort (HDCP 1.3), HDMI (HDCP 1.4) 	Warranty Warranty and service Terms *) Maximum of 30,000 hours of operation	cable), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP100-K (Short DisplayPort connection cable, 100 cm, PP200-K (DisplayPort cab 200 cm), CC100-BK (Short USB-C port cable, 100 cm CP200-BK (USB-C to DisplayPort cable, 200 cm), PCS 03-BK (Thin client mount for the stand EIZO FlexStand FlexStand S), EIZO StreenCleaner (for the best possibl clean without scratching the monitor) 5 years warranty*
Auto EcoView EcoView Index EcoView Optimizer Coverdrive No flickering thanks to hybrid controls HDCP Decoder Input signal identification Built-in speakers OSD language Adjustment options Button Guide Integrated power unit Ports Signal inputs USB specification USB upstream ports	 USB-C (DisplayPort Alt Mode, HDCP 1.3), DisplayPort (HDCP 1.4) USB-C (DisplayPort Alt Mode, 70 W max.) 	Warranty Warranty and service Terms *) Maximum of 30,000 hours of operation	cable), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP100-K (Short DisplayPort connection cable, 100 cm), PP200-K (DisplayPort cab 200 cm), CC100-BK (Short USB-C port cable, 100 cm CP200-BK (USB-C to DisplayPort cable, 200 cm), PC3 03-BK (Thin client mount for the stand EIZO FlexStand FlexStand S), EIZO ScreenCleaner (for the best possibl clean without scratching the monitor) 5 years warranty*
Auto EcoView EcoView Index EcoView Optimizer Coverdrive No flickering thanks to hybrid controls HDCP Decoder Input signal identification Built-in speakers OSD language Adjustment options Button Guide Integrated power unit Ports Signal inputs USB specification USB upstream ports USB downstream ports	 USB-C (DisplayPort Alt Mode, HDCP 1.3), DisplayPort (HDCP 1.3), HDMI (HDCP 1.4) USB-C (DisplayPort Alt Mode, TO W max.) 1 x type C (DisplayPort Alt Mode, 15 W max.), 3 x type A 	Warranty Warranty and service Terms *) Maximum of 30,000 hours of operation	cable), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP100-K (Short DisplayPort connection cable, 100 cm), PP200-K (DisplayPort cab 200 cm), CC100-BK (Short USB-C port cable, 100 cm CP200-BK (USB-C to DisplayPort cable, 200 cm), PC3 03-BK (Thin client mount for the stand EIZO FlexStand FlexStand S), EIZO ScreenCleaner (for the best possibl clean without scratching the monitor) 5 years warranty*
Auto EcoView Auto EcoView Index EcoView Optimizer CoView Optimizer Coverdrive No flickering thanks to hybrid controls HDCP Decoder Input signal identification Built-in speakers DSD language Adjustment options Builton Guide Integrated power unit Ports Signal inputs JSB specification JSB upstream ports JSB downstream ports	 USB-C (DisplayPort Alt Mode, HDCP 1.3), DisplayPort (HDCP 1.4) USB-C (DisplayPort Alt Mode, TO W max.) 1 x type C (DisplayPort Alt Mode, 15 W max.), 3 x type A USB-C, DisplayPort, HDMI (YUV, RGB) 	Warranty Warranty and service Terms *) Maximum of 30,000 hours of operation	cable), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP100-K (Short DisplayPort connection cable, 100 cm), PP200-K (DisplayPort cab 200 cm), CC100-BK (Short USB-C port cable, 100 cm CP200-BK (USB-C to DisplayPort cable, 200 cm), PC3 03-BK (Thin client mount for the stand EIZO FlexStand FlexStand S), EIZO ScreenCleaner (for the best possibl clean without scratching the monitor) 5 years warranty*
Auto EcoView EcoView Index EcoView Optimizer Overdrive No flickering thanks to hybrid controls HDCP Decoder Input signal identification Built-in speakers OSD language	 USB-C (DisplayPort Alt Mode, HDCP 1.3), DisplayPort (HDCP 1.3), HDMI (HDCP 1.4) USB-C (DisplayPort Alt Mode, TO W max.) 1 x type C (DisplayPort Alt Mode, 15 W max.), 3 x type A 	Warranty Warranty and service Terms *) Maximum of 30,000 hours of operation	cable), PM200-K (DisplayPort cable to transfer digital video and audio signals.), PP100-K (Short DisplayPort connection cable, 100 cm), PP200-K (DisplayPort cable 200 cm), CC100-BK (Short USB-C port cable, 100 cm CP200-BK (USB-C to DisplayPort cable, 200 cm), PCS 03-BK (Thin client mount for the stand EIZO FlexStand - FlexStand S), EIZO StreenCleaner (for the best possibl clean without scratching the monitor) 5 years warranty*

Belgrader Straße 2 41069 Mönchengladbach

Phone: +49 2161 8210-0 www.eizo.eu

Data sheet created on 05.09.2021