


# DIGITUS SFP+ 10G 0.5m DAC cable

**DN-81220**  
**EAN 4016032445937**

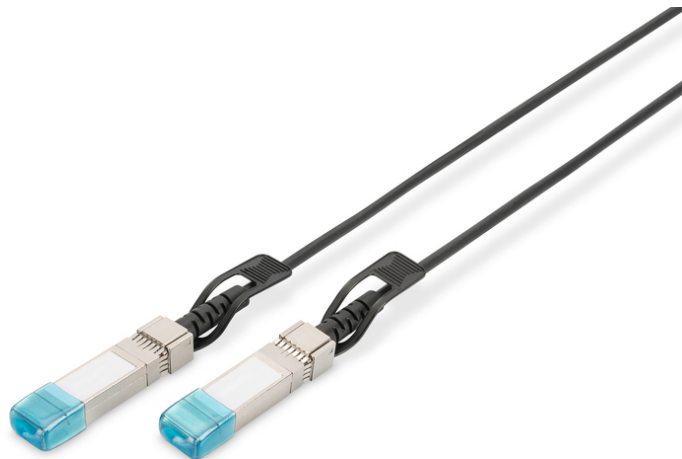

**10G SFP+ DAC Cable 0.5m, AWG 30**  
**Allnet, CISCO, Dell, D-Link, Edimax, Etherwan, Fortinet**

The Digitus® SFP+ 10G DAC cables are the ideal connection between switches in the backbone area. The SFP+ 10G DAC cables support the following data rates and applications: 10G Ethernet (10.21 Gbps), 10G fiber channel (10.52 Gbps), 8G fiber channel (8.5 Gbps), 4G fiber channel (4.25 Gbps), 2G fiber channel (2.125 Gbps), 1G fiber channel (1.0625 Gbps), Gigabit Ethernet (1.25 Gbit/s), CPRI option 2,3,5,6,7,8, OBSAI RP3 x 2, RP3 x 4, RP x 8. The SFP+ 10G DAC cables are compatible with all leading switch manufacturers.

**Extend your copper connections**

- AWG 30 Twinax cable
- 0.5 m maximum distance
- 1.0625-10.52Gbps supported data rate
- Supported applications: 10G Ethernet (10.21 Gbps), 10G fiber channel (10.52 Gbps), 8G fiber channel (8.5 Gbps), 4G fiber channel (4.25 Gbps), 2G fiber channel (2.125 Gbps), 1G fiber channel (1.0625 Gbps), Gigabit Ethernet (1.25 Gbit/s), CPRI option 2,3,5,6,7,8, OBSAI RP3 x 2, RP3 x 4, RP x 8

- Compatible with the following manufacturers: Ubiquiti, Allied Telesis, Allnet, CISCO, D-Link, Edimax, Intellinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, ZyXEL, ZTE , Avaya , Mikrotik , ENTERASYS, FINISAR, FORCE 10 ,RIVERSTONE , Fortinet
- DDM / DOM support
- Temperature range: 0 ~ 70 °C
- Ports: SFP +
- Power: + 3.3V supply voltage
- Power consumption: 0.5W
- Transceiver type: DAC
- AWG: 30
- Length: 0.5 m
- Manufacturer compatibility: Universal (MSA)
- DDM Support: no

**Package contents**

- SFP+ 10G 0.5m DAC cable
- Quick installation guide

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	120	1.50	48.00	48.00	38.00	87,552.00
Packaging Unit Inside	1	0.01	26.00	26.00	2.00	1,352.00
Packaging Unit Single	1	0.01	26.00	26.00	2.00	1,352.00
Net single without Packaging	1	0.01	26.00	26.00	2.00	1,352.00