


# DIGITUS SFP+ 10G 10m DAC cable

DN-81226  
EAN 4016032445999

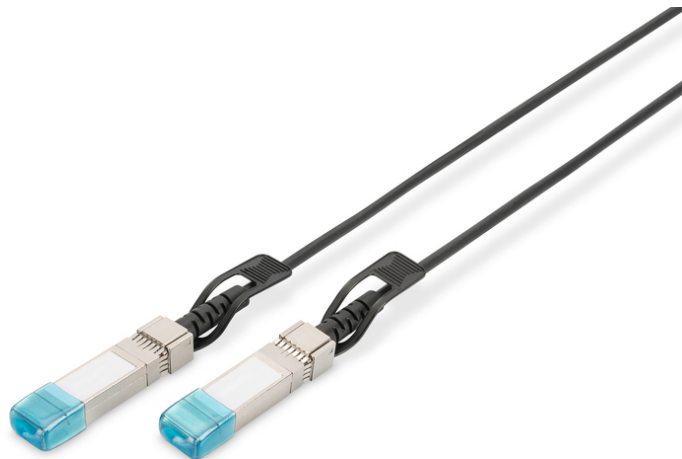

**SFP+ 10G DAC Cable 10m, AWG 24**  
**Allnet, CISCO, Dell, D-Link, Edimax, Etherwan, Fortinet,**

The Digitus® SFP+ 10G DAC cables are the ideal connection between switches in the backbone area. The SFP+ 10G DAC cables support the following data rates and applications: 10G Ethernet (10.21 Gbps), 10G fiber channel (10.52 Gbps), 8G fiber channel (8.5 Gbps), 4G fiber channel (4.25 Gbps), 2G fiber channel (2.125 Gbps), 1G fiber channel (1.0625 Gbps), Gigabit Ethernet (1.25 Gbit/s), CPRI option 2,3,5,6,7,8, OBSAI RP3 x 2, RP3 x 4, RP x 8. The SFP+ 10G DAC cables are compatible with all leading switch manufacturers.

**Extend your copper connections**

- AWG 24 Twinax cable
- 10 m maximum distance
- 1.0625-10.52Gbps supported data rate
- Supported applications: 10G Ethernet (10.21 Gbps), 10G fiber channel (10.52 Gbps), 8G fiber channel (8.5 Gbps), 4G fiber channel (4.25 Gbps), 2G fiber channel (2.125 Gbps), 1G fiber channel (1.0625 Gbps), Gigabit Ethernet (1.25 Gbit/s), CPRI option 2,3,5,6,7,8, OBSAI RP3 x 2, RP3 x 4, RP x 8

- Compatible with the following manufacturers: Ubiquiti, Allied Telesis, Allnet, CISCO, D-Link, Edimax, Intellinet, KTI Networks, Level One, PLANET, Tenda, TP-Link, TRENDnet, ZyXEL, ZTE , Avaya , Mikrotik , ENTERASYS, FINISAR, FORCE 10 ,RIVERSTONE , Fortinet
- DDM / DOM support
- Temperature range: 0 ~ 70 °C
- Ports: SFP +
- Power: + 3.3V supply voltage
- Power consumption: 0.5W
- Transceiver type: DAC
- AWG: 24
- Length: 10 m
- Manufacturer compatibility: Universal (MSA)
- DDM Support: no

**Package contents**

- SFP+ 10G 10m DAC cable
- Quick start guide

Logistics						
	Number (pcs)	Weight (kg)	Depth (cm)	Width (cm)	Height (cm)	cm³
Packaging Unit Carton	40	1.50	48.00	48.00	38.00	87,552.00
Packaging Unit Inside	1	0.04	32.00	32.00	6.00	6,144.00
Packaging Unit Single	1	0.04	32.00	32.00	6.00	6,144.00
Net single without Packaging	1	0.04	32.00	32.00	6.00	6,144.00