



APC Smart-UPS On-Line SRT2200RMXLI-NC Noodstroomvoeding - 2200VA, 8x C13 & 2x C19, rackmount, NMC



Merk : APC


Artikelcode: SRT2200RMXLI-NC

Productnaam : Smart-UPS On-Line SRT2200RMXLI-NC
Noodstroomvoeding - 2200VA, 8x C13 & 2x C19, rackmount, NMC

APC Smart-UPS On-Line SRT2200RMXLI-NC Noodstroomvoeding - 2200VA, 8x C13 & 2x C19, rackmount, NMC

APC Smart-UPS On-Line SRT2200RMXLI-NC Noodstroomvoeding - 2200VA, 8x C13 & 2x C19, rackmount, NMC. UPS-topologie: Dubbele conversie (online), Output power capacity: 2,2 kVA, Uitgangsvermogen: 1980 W. Stopcontacttypes: C13 stekker, C19 stekker, Aantal AC uitgangen: 12 AC-uitgang(en), Soort serieële aansluiting: RJ-45. Batterijtechnologie: Sealed Lead Acid (VRLA), Batterij capaciteit: 367 VAh, Acculevensduur (max): 5 jaar. Vormfactor: Rackmontage, Kleur van het product: Zwart, Rackcapaciteit: 2U. Breedte: 432 mm, Diepte: 584 mm, Hoogte: 85 mm

Kenmerken		Accu/Batterij	
UPS-topologie *	Dubbele conversie (online)	Accu/Batterij oplaadtijd	3 uur
Output power capacity *	2,2 kVA	Design	
Uitgangsvermogen *	1980 W	Vormfactor *	Rackmontage
Golfvorm *	Sinus	Rackcapaciteit	2U
Ingang operation voltage (min) *	160 V	Snoerlengte	2,44 m
Ingang operation voltage (max) *	275 V	Kleur van het product *	Zwart
Frequentie *	40 - 70 Hz	Type beeldscherm	LCD
Uitgang operation voltage (min)	220 V	LED-indicatoren	✓
Uitgang operation voltage (max)	240 V	Internationale veiligheidscode (IP)	IP20
Surge energy rating	340 J	Certificering	CE, CE Mark, EAC, EN/IEC 62040-1, EN/IEC 62040-2, RCM, VDE
Crest factor	3:1	Eisen aan de omgeving	
Emergency Power Off (EPO)	✓	Bedrijfstemperatuur (T-T)	0 - 40 °C
Output voltage THD	2 procent	Temperatuur bij opslag	-20 - 50 °C
Geluidsniveau	55 dB	Relatieve vochtigheid in bedrijf (V-V)	0 - 95 procent
Geluidsalarm(en)	✓	Luchtvochtigheid bij opslag	0 - 95 procent
Poorten & interfaces		Hoogte, in bedrijf	0 - 3000 m
Stopcontacttypes	C13 stekker, C19 stekker	Hoogte bij opslag	0 - 15000 m
Aantal AC uitgangen	12 AC-uitgang(en)	Technische details	
Number of output IEC jumpers	2	Duurzaamheidscertificaten	RoHS, ENERGY STAR
USB-poort	✓	Gewicht en omvang	
Seriële interface	✓	Breedte	432 mm
Soort serieële aansluiting	RJ-45	Diepte	584 mm
Aantal Ethernet LAN (RJ-45)-poorten	1	Hoogte	85 mm
SmartSlot	✓	Gewicht	25 kg
Accu/Batterij		Breedte verpakking	599 mm
Batterijtechnologie	Sealed Lead Acid (VRLA)	Diepte verpakking	810 mm
Batterij capaciteit	367 VAh	Hoogte verpakking	246 mm
Ondersteund aantal accu's/batterijen	1	Gewicht verpakking	34 kg
Acculevensduur (max)	5 jaar	Logistieke gegevens	
		Code geharmoniseerd systeem (HS)	85078000
		Overige specificaties	
		Spanning	230 V

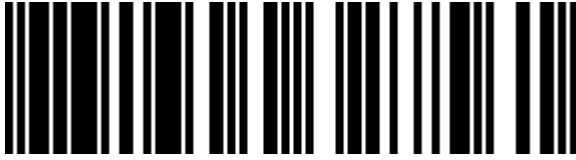

0731304327561



731304327561

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 14-MAR-2023. Prints or copies of Information are only valid on the printed Publication date