

# PDU Technology Specification

Date: 04/16/2009

NO.: SWDT0340905013

<b>Customer</b>		<b>RoHS</b>	Yes
<b>Product Name</b>		<b>Customer's Code</b>	
<b>Part Number</b>		<b>Picture Code</b>	
<b>No.</b>	<b>Item</b>	<b>Detailed Description</b>	
1	Product Series	AUE2230	
2	Socket Type	DIN49440 16A Socket[7];	
3	Socket Quantity	7	
4	Power Input	Left end single input	
5	Bracket Install	Frontal installation	
6	Cable with plug	DIN49441 16A plug	
7	Control Function	No controlling function	
8	Protection Function	CR32 16A digital ammeter	
9	Case	Black	
10	Cable Specification	3 x 1.5 mm <sup>2</sup> x 2M	
11	Product Size	L x W x H = 482.6 x 68 x 44.4 mm	
12	Mounting Length	465 mm	
13	Case Length	429.5 mm	
14	PDU Exponent	<b>0.778</b>	
15	Fittings	2pcs φ6×16mm cross bolt, 2pcs M6 float nut	
16	Product Label	Product Name	Designated Power Distribution Unit for Cabinet
		Specification Model	16-8406
		Rating voltage	250VAC 50/60Hz
		Rating Current	16A
		Max. Current	
		Max. Power	4000 W
		Safety Authentication	CE
		Logo	RoHS
	Producer		
<b>No.</b>	<b>Add-In</b>		
1	Socket assemble	No	
2	Interior Connection Wire	Combined copper	
3	Interior Connection Style	Standard connection	
4	Fix the Cable	Small cable clamp	
5	Module Assemble ( form left to right )	Please see the following picture	
6	Others	No	
<b>Made by:</b> Peter		<b>Customer confirm:</b>	<b>Check:</b>
			<b>Authorize:</b>


**This technology specification is for: design product for customer and confirm customer's requirements, and is also the basic gist for arranging production.**

# PDU Technology Specification

Date: 04/16/2009

NO.: SWDT0340905013

Preview

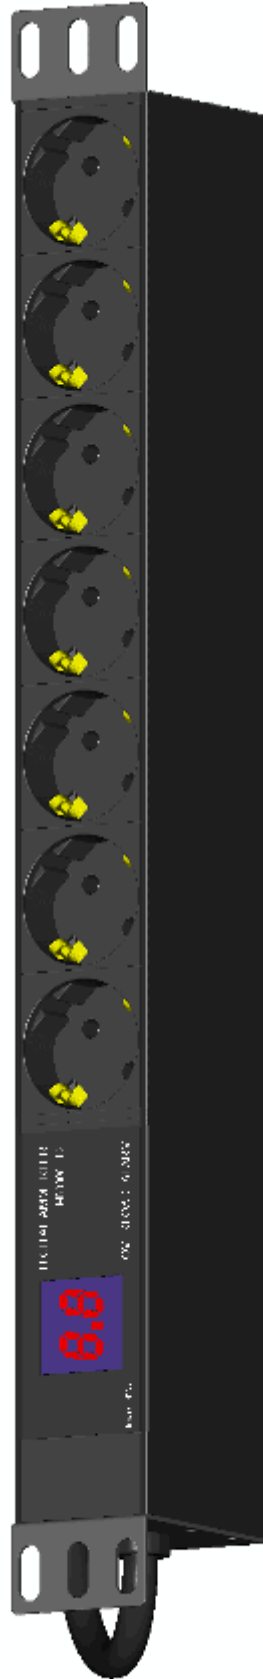

DIN49441 16A plug

DIMENSION AND TOLERANCES ( Unit: mm )		Length: 482.6	Mounting length: 465
Width: 68	Case length: 429.5	Height: 44.4	case tolerance: $\pm 1.0$
	SIGN	DATE	
DRAWN	Peter	04/16/2009	
CHK'D			
APP'D			
	Customer	Product name	
	Part number	Customer's code	
	Drawing number	Edition number	