RoHS Compliant

REV	DESCRIPTION OF CHANGE	DATE
A0	INITIAL RELEASE	2012-05-04

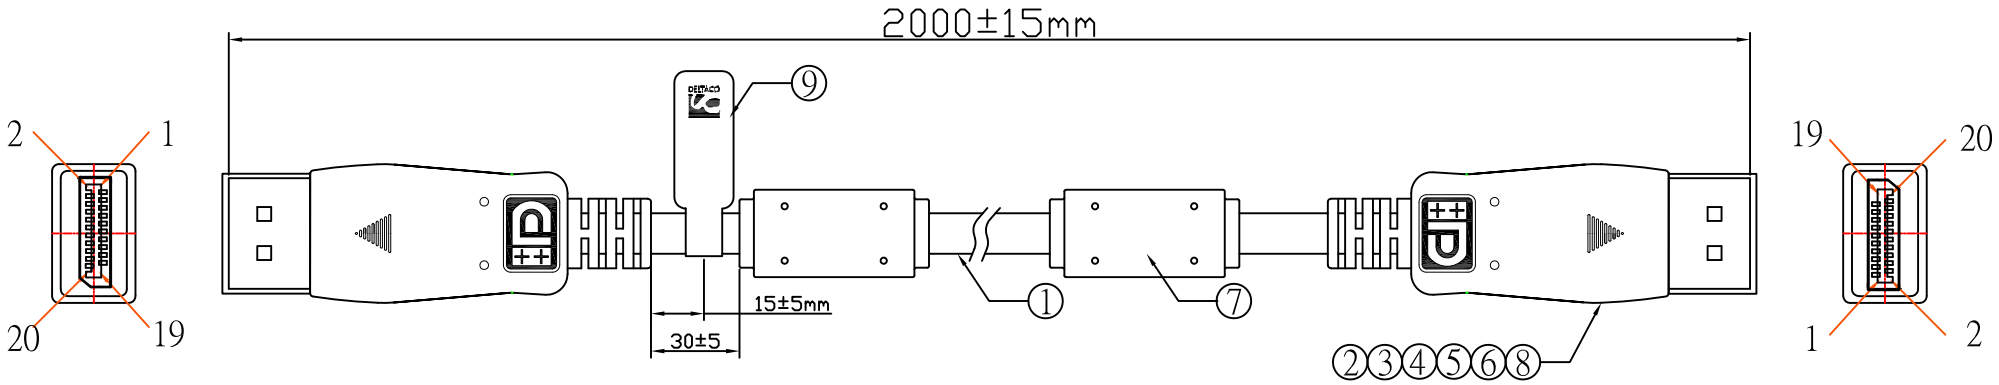

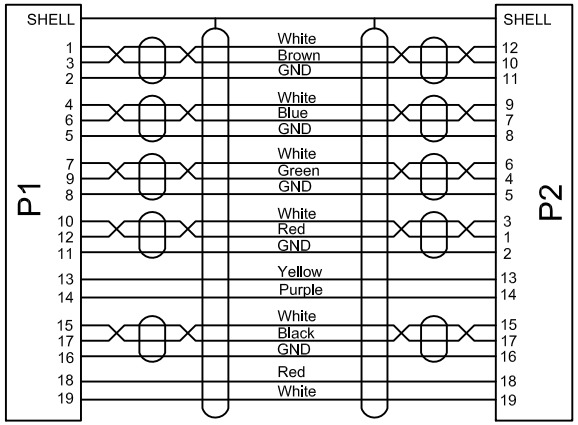

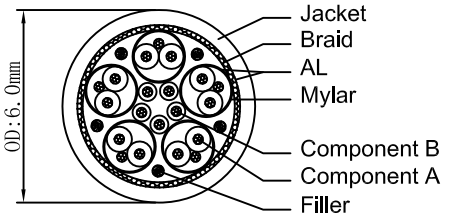

NOTES:

1. ELECTRICAL PROPERTIES:
   - 1.1 100% open and short test.
   - 1.2 Conductor resistance: 5 OHMS
   - 1.3 Insulation resistance: 10 MEGOHMS
   - 1.4 Hi pot: DC300V/0.01S
   - 1.5 Audio & Vedio test, Output resolution: 1920*1080 P
2. All material be ROHS compliant.

NO.	Material name	Item number	Specifications Description	Quantity
9	tag	AM-BQ0152	Black background, White character(DP-1020)	1 Pcs
8	Dust cap	OR-0008	DP Dust cap	2 Pcs
7	ferrite core	OR-0016	ferrite core:14.2*28.5*9.5mm	2 Pcs
6	PVC	PVC-0001	60P PVC Black	36.0g
5	copper foil	AM-TB0012	copper foil:W35*L55mm*0.06mm	2 Pcs
4	masking tape	AM-JZ0006	masking tape:W=30mm	100mm
3	PE	PE-0001	LDPE (RoHs)	22.0g
2	Connector	CN-G0012	DP(M),Gold-plated	2 Pcs
1	Cable	DP1-60-3034	(7/0.10Tx1P+D+AL+MYLAR)x5P+7/0.10Tx5C+F+ADB16/5/0.12(AMA) JACKET PVC BLACK. OD:6.0±0.20mm L=1960+10/-0mm	1 Pcs

图号 (DWG NO)	XY-A0162	单位 (UNIT): MM	DELTACO
版次 (REV):	A0	比例 (SCALE) 1:1	
页次 (PAGE):	1/1		
设计 (DESIGN)	Dean	DIMENSIONS ARE IN MILLIMETERS TOLERANCES: LINEAR: X ± 1.0, X.X ± 0.5, X.XX ± 0.15, X.XXX ± 0.05, ANGULAR: ± 0.5°	品名(ITEM NO) DisplayPort Male to DisplayPort Male Cable, Molding type.
审核 (CHECKED)			料号(PART NO) DP-1020
核准 (APPROVED)			