




Zip40 Charging Cart

Includes PowerShuttle™ Technology

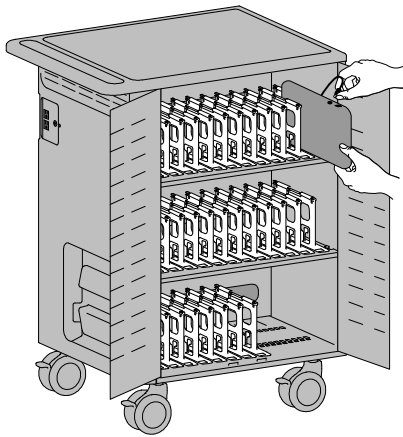

Cart dimensions
30.3"W x 45.4"H x 26.1"D (77x115x66 cm)

Cart weight (without equipment)
175 lb (79 kg)

Rated weight capacity
Top Work Surface
25 lb (11.3 kg)

Device Slot Size
17.1"W x 11.2"H (43.4x28.4 cm)
Device with case and power cord installed must fit within these dimensions.

Max Dimensions of WAP
10"W x 10"H x 2.2"D (25.4x25.4x5.6 cm)

Cooling/ventilation
Four 12V DC fans, ventilated doors and side panel

External power outlet(s)
One or two outlets, depending on region
100-120V~, 4A max, 50/60 Hz or
220-240V~, 2A max, 50/60 Hz

WAP and Switch Outlets
100/120V~, 4A max, 50/60 Hz or
220-240V~, 2A max, 50/60 Hz

Shipping dimensions
37"W x 52"D x 30"H (94x132x75 cm)

Shipping weight
221 lb (100 kg)

Power system
100-120V~, 12A, 50/60Hz
Maximum input for 5 devices cannot exceed 8.5A
or
220-240V~, 10A, 50/60Hz
Maximum input for 5 devices cannot exceed 4.0A

Environmental
Temperature range:
Operating 0° to 30°C (32° to 86°F)
Storage -40° to 60°C (-40° to 140°F)

Relative humidity (maximum):
Operating 10%–90% (non condensing)
Storage 5%–95% (non condensing)

Altitude (maximum): 2000 m (6,562 ft)

Certification:
UL / IEC 60950 Information Technology Equipment, and UL / IEC 62368 Audio/Video Information and Communication Technology Equipment.
CAN/CSA C22.2 No. 60950-1
CAN/CSA C22.2 No. 62368-1
UL 1678 Household, Commercial, and Institutional-Use Carts, Stands, and Entertainment Centers for Use with Audio and/or Video Equipment.
ICES-003 Issue 5, Class A
FCC Part 15 Class A
RoHS and REACH compliant material used.

© 2019 Ergotron, Inc. rev. 05/13/20 DIM-Zip40-2 Content is subject to change without notification

Americas Sales and Corporate Headquarter

St. Paul, MN USA
(800) 888-8458
+1-651-681-7600
www.ergotron.com
incidesales@ergotron.com

EMEA Sales

Amersfoort, The Netherlands
+31 33 45 45 600
www.ergotron.com
info.eu@ergotron.com

APAC Sales

Sydney, Australia
www.ergotron.com
apaccustomerservice@ergotron.com

Worldwide OEM Sales

www.ergotron.com
info.oem@ergotron.com