



Overview

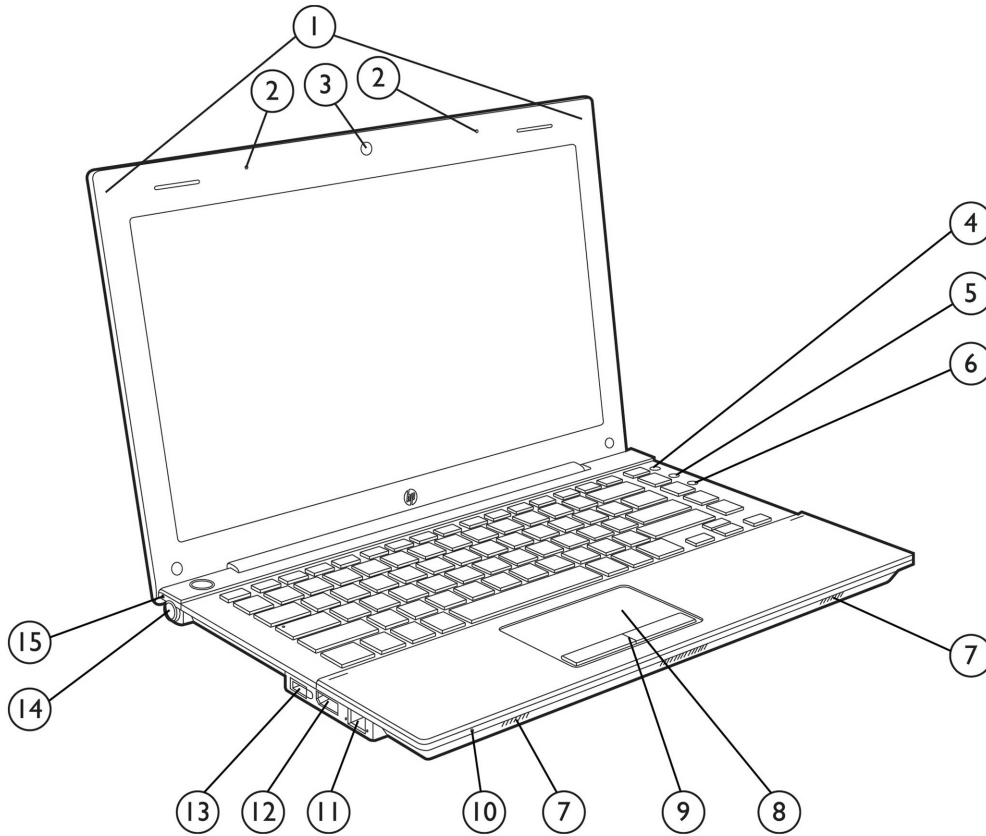


- | | |
|---|--|
| 1. WLAN and WWAN antennas (select models) | 9. Touchpad buttons |
| 2. Dual-microphone array | 10. Hard drive activity / HP 3D DriveGuard LED |
| 3. Integrated 2 MP webcam | 11. RJ-45/Ethernet port |
| 4. Wireless on/off button | 12. DisplayPort |
| 5. QuickLook button | 13. USB 2.0 Port (powered) |
| 6. QuickWeb button | 14. Power connector |
| 7. Stereo speakers | 15. Battery charging LED |
| 8. Touchpad with scroll zone | |

Right
View

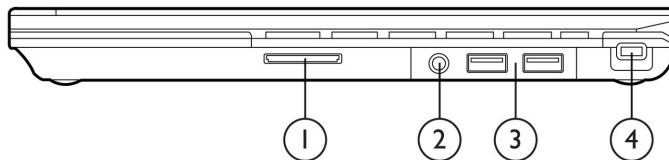

- | | |
|------------------------------------|-------------------------|
| 1. Secure Digital (SD) slot | 3. (2) USB 2.0 Ports |
| 2. Combo stereo headphone/mic jack | 4. Kensington Lock slot |

Overview

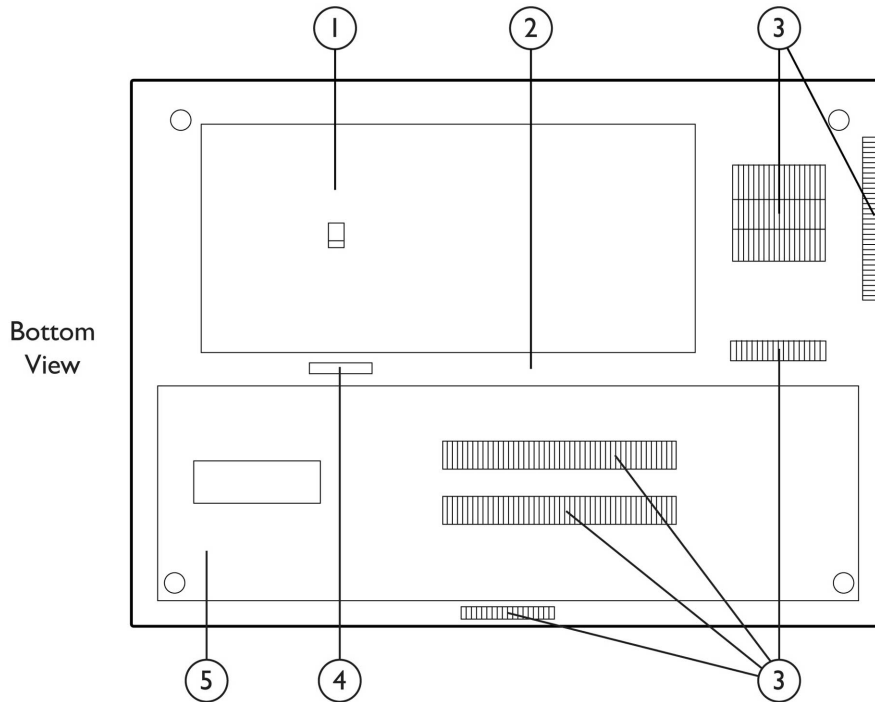

1. Battery bay
2. SIM slot for WWAN (select models) – inside battery bay
3. Vents
4. Battery release latch
5. Wireless/memory/hard drive access door

At A Glance

- Genuine Windows 7 versions offered when Windows 7 is generally available, Genuine Windows Vista versions, Windows XP Professional (available through downgrade rights from Genuine Windows Vista Business or Genuine Windows 7 Professional), Red Flag Linux (PRC only), or FreeDOS
- Sleek design starting at 3.79 lb/1.72 kg and 0.93-inch/23.5 mm thin
- Durable anodized aluminum display enclosure and palm rest; magnesium alloy bottom case
- 13.3-inch diagonal LED-backlit HD 16:9 display, with optional BrightView and HP Privacy Filter support
- BFR/PVC-free configuration available.
- Flexible wireless connectivity options:
 - Integrated HP un2420 EV-DO/HSDPA Mobile Broadband Module provides worldwide Gobi mobile Internet technology with GPS
 - Integrated 802.11 a/b/g/n or b/g wireless LAN module
 - Bluetooth® 2.1
- Choice of Intel® ultra-low voltage Celeron® or standard voltage Core™2 Duo processor
- Choice of 160/250/320-GB 2.5-inch SMART SATA II hard drive protected by HP 3D DriveGuard; or 80/128 GB 2.5-inch Solid State Drive
- Optional HP External USB 2.0 CD/DVD R/RW Drive and HP USB 2.0 Docking Station
- Secure Digital (SD) slot
- Integrated 2 MP Webcam, DisplayPort, and dual-microphone array
- Enhanced security features including HP ProtectTools, HP SpareKey, and HP Disk Sanitizer
- HP QuickLook 3 for instant access to email, calendar, and contact information; HP QuickWeb for convenient internet access

Standard Features

Processors

Intel Core 2 Duo Processor SP9300 (2.26 GHz, 6 MB L2 cache, 1066 MHz FSB)*

Intel Core 2 Duo Processor SP9400 (2.40 GHz, 6 MB L2 cache, 1066 MHz FSB)

Intel Celeron Processor SU2300 (1.20 GHz, 1 MB L2 cache, 800 MHz FSB)

* Intel's numbering is not a measurement of higher performance.

NOTE: Processor speed denotes maximum performance mode; processors will run at lower speeds in battery optimization mode.

Operating System

Preinstalled

Genuine Windows 7 Professional Edition 32*

Genuine Windows 7 Home Premium Edition 32*

Genuine Windows 7 Home Basic Edition 32*

Genuine Windows Vista Business 32**

Genuine Windows Vista Home Basic 32**

Windows XP Professional (available through downgrade rights from Genuine Windows 7 Professional)*†

Windows XP Professional (available through downgrade rights from Genuine Windows Vista Business)*†

Red Flag Linux (PRC only)

FreeDOS

Supported

Genuine Windows 7 Enterprise 32*

Genuine Windows Vista Enterprise 32**

Certified

SuSE Linux Enterprise Desktop 10

* Offered when Windows 7 is generally available. System may require upgraded and/or separately purchased hardware and/or a DVD drive to install the Windows 7 software and take full advantage of Windows 7 functionality.

See <http://www.microsoft.com/windows/windows-7/> for details.

** Certain Windows Vista product features require advanced or additional hardware. See: <http://www.microsoft.com/windowsvista/getready/hardwarereqs.mspx> and <http://www.microsoft.com/windowsvista/getready/capable.mspx> for details. Windows Vista Upgrade Advisor can help you determine which features of Windows Vista will run on your computer. To download the tool, visit: <http://www.windowsvista.com/upgradeadvisor>.

† Windows 7 Professional or Windows Vista Business disk may be included for future upgrade if desired. To qualify for this downgrade an end user must be a business (including governmental or educational institutions) and is expected to order at least 25 customer systems with the same custom image.

Chipset

Mobile Intel GS45 Express Chipset ICH9M-Enhanced

Graphics

Mobile Intel Graphics Media Accelerator 4500MHD

Microsoft DirectX 10 (Shader 4.0) and OpenGL 2.0 capable

Standard Features

Display	Internal	13.3-inch diagonal LED-backlit HD anti-glare (1366 × 768 resolution) 13.3-inch diagonal LED-backlit HD BrightView (1366 × 768 resolution) HP Privacy Filter support
	External	Up to 32-bit per pixel color depth DisplayPort supports resolutions up to 2560 x 1600, 30-bit color depth at 60 Hz with full HD (1920 x 1080) monitors, 24-bit color depth at 120 Hz NOTE: Resolutions are dependent upon monitor capability, and resolution and color depth settings.

Memory	Standard	1 GB, 2 GB, or 4 GB DDR3 1066/1333 MHz SDRAM SODIMM* one SODIMM slot
	Maximum	Supports up to 4 GB maximum * All memory modules operate at the maximum system supported speed of 1066 MHz. NOTE: Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility. Availability of 4 GB of memory requires a Windows 64-bit operating system or Linux. With Windows 32-bit operating systems, memory above 3 GB may not all be available due to system resource requirements.

Communications	Integrated Marvell Ethernet (10/100/1000 NIC)* * The term "10/100/1000" or "Gigabit" Ethernet indicates compliance with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/s. For high-speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.
-----------------------	--

Wireless Devices	Support for a broad range of secure, integrated wireless LAN and wireless WAN options featuring support for the latest industry standards. Mobile Broadband (WWAN) requires a Windows operating system and is available in select countries as a standard, factory configurable feature or as an option to be added later. Integrated Bluetooth is also available (factory configurable only) and can be combined with any of the supported wireless LAN and wireless WAN options.
HP un2420 EV-DO/HSPA Mobile Broadband Module	Integrated mobile broadband module with Gobi global mobile Internet technology that provides connectivity to both CDMA (EVDO) and UMTS (HSPA) networks. It also provides GPS functionality for various mapping applications and security applications. NOTE: Separately purchased mobile network operator service is required. Two 850/900/1575/1800/1900/2100 MHz antennas integrated in the top of the display panel support current and future WWAN technologies.
All 802.11 integrated wireless LAN options	Wi-Fi CERTIFIED* Cisco Compatible Extensions support Wired Equivalent Privacy (WEP) support up to 128-bit keys Wi-Fi Protected Access (WPA) and WPA2 support 802.1x authentication support, including EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, and LEAP Advanced Encryption Standard (AES) support Two antennas integrated in the display enclosure
Intel WiFi Link 5100	Integrated support for 802.11 a, b g, and n* Up to 300 mbps data rate

Standard Features

Intel Centrino Wireless-N 1000	Integrated support for 802.11 b, g, and n* Up to 300 mbps data rate
Broadcom 4322AGN 802.11a/b/g/n Wi-Fi Adapter	Integrated support for 802.11a, b, g, and n* Up to 300 mbps data rate
Broadcom 4312G 802.11b/g WiFi Adapter	Integrated support for 802.11 b and g Up to 54 mbps data rate
HP Integrated Module with Bluetooth Wireless Technology	Bluetooth Specification v2.1 compliant Works with a wide range of Bluetooth devices

* Th In countries where 802.11n is not allowed, this capability is not enabled (Intel 802.11a/b/g only).

Keyboard

The 101/102-key compatible keyboard features an industry standard, full-pitch key layout with desktop keyboard features, such as the isolated inverted-T cursor control keys, editing keys, both left and right control and alt keys, and 12 function keys. US and International key layouts are available. Other features include an integrated numeric keypad, hotkeys for instant access to power conservation, brightness, and other features, 19 mm x 19 mm key pitch (center-to-center spacing), 2.0 mm stroke, and comfort-dished keycaps.

HP DuraKeys is a clear coating applied over the notebook keyboard that helps protect the finish and the printed characters on the keys.

Pointing device

Touchpad with scroll zone, two pick buttons

Expansion card slots

Secure Digital slot Supports SD (Secure Digital), MultiMedia Card

Storage

Internal Storage Device 160/250/320 GB 7200 rpm 2.5-inch SMART SATA II Hard Drive
or
80/128 GB 2.5-inch Solid State Drive

NOTE: Hard drives are customer removable and will withstand multiple insertion/removal cycles. Up to 10 GB is reserved for the system recovery software.

HP 3D DriveGuard (Windows models only) The hard drive is mounted to the notebook frame, reducing the transmission of shock away from the hard drive. Uses three-axis digital motion detection with intelligent sensitivity to help protect the hard drive during normal use from shock and vibration. The digital accelerometer temporarily halts all data transfer and parks the hard drive when abrupt motion is detected.

Optical drive Optional HP External USB 2.0 CD/DVD R/RW Drive

Standard Features

Interfaces

External monitor	One - DisplayPort
Combo stereo headphone/mic jack	One
Power connector	One
RJ-45/Ethernet	One
USB 2.0	Three (including one powered USB 2.0 port)
LED status indicators	Seven

Audio/Visual

High definition audio support
Stereo speakers
Integrated dual-microphone array
Combo stereo headphone/mic jack

2 MP Webcam

- Supports videoconferencing and still image capture
- Large image sensor for excellent color matching and good low light sensitivity
- Up to 30 frames/sec
- Fixed focus lens
- Video capture at VGA, 1.3 Mpixel, and 2 Mpixel resolutions
- 16-bit true color (camera sensors output YCrCb format among others)

Software

Preinstalled software with Windows Vista or Windows XP	HP Recovery Manager (available with Vista only) HP Assistant HP ProtectTools Security Manager HP QuickLaunch Buttons Software HP QuickLook 3 HP QuickWeb HP Connection Manager HP Wireless Assistant HP 3D DriveGuard Microsoft Office Professional 2007 60-day Convertible Trial McAfee Total Protection* PDF Complete SE Synaptics Touchpad Driver Microsoft Windows Live Messenger (select models) HP Webcam Software
---	--

Additional software available from the web HP SoftPaq Download Manager

* 60 day trial period for McAfee Total Protection for Small Business software. Internet access required to receive updates. First update included. Subscription required for updates thereafter.

Standard Features

HP ProtectTools Security Manager HP ProtectTools Security Manager is the security platform for business notebooks and desktops. The HP ProtectTools Security Manager is an extensible client security console that delivers enhanced security capabilities through add-on software modules. The following modules are available on the hard drive (also downloadable from the web) and can be configured in Software Setup:

- BIOS Configuration for HP ProtectTools
- Credential Manager for HP ProtectTools
- Device Access Manager for HP ProtectTools
- Drive Encryption for HP ProtectTools
- File Sanitizer for HP ProtectTools
- Privacy Manager for HP ProtectTools

Security	Standard Features	HP ProtectTools Security Manager Easy Setup Wizard One Step Login Enhanced Pre-Boot Security HP SpareKey Disk Sanitizer Configuration Control Hardware Memory Change Alert Ownership Tag Setup Password Power-On Password HP 3D DriveGuard (Windows models only) Kensington Lock Slot Support for Computrace / LoJack for Laptops (must be purchased separately) HP Privacy Filter (must be purchased separately)
-----------------	--------------------------	---

For more information on HP security solutions refer to: <http://www.hp.com/go/security>.

Power Supply	External 65-watt Smart AC adapter, 6-foot (1.8-meter) power cord included. Total length including external AC adapter is 12 feet (3.66 meter). HP Fast Charge* *HP Fast Charge recharges your battery up to 90% within 90 minutes when the system is off. Fast Charge Technology does not apply to 9 cell primary batteries.
---------------------	---

Battery	Primary Battery	6-cell (62 WHr) high capacity Lithium-Ion 4-cell (41 WHr) high capacity Lithium-Ion
----------------	------------------------	--

Standard Features

Battery Life

	With Hard Drive		With Solid State Drive	
	SU2300 CPU	SP9300 CPU	SU2300 CPU	SP9300 CPU
6-cell Primary Battery	Up to 10 hours	Up to 9.5 hours	*	*
4-cell Primary Battery	Up to 7 hours	Up to 6.5 hours	Up to 8 hours	Up to 7.5 hours

* This configuration not tested for battery life.

NOTE: The listed battery life measurements were taken on models running Microsoft Windows XP Professional. Battery life will vary depending on the product configuration, product model, applications loaded on the product, power management settings of the product, and the product features used by the customer. As with all batteries, the maximum capacity of this battery will decrease with time and usage.

System Standby Time

Up to 1 week

Power Conservation

Supports enhanced Intel SpeedStep technology with Intel Core 2 Duo ULV processors (allows Battery Optimized Mode, Maximum Performance Mode, or Automatic mode)

Intel Display Power Saving technology

Hibernation

Standby

ACPI compliance

Service and Support

HP Services includes a one-year standard parts and labor warranty, pick-up or carry-in, and toll-free 7 x 24 hardware technical phone support (depending on model). On-site service and warranty upgrades are also available (depending on model). HP Care Pack Services extend service contracts beyond the standard warranties. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: <http://www.hp.com/go/lookuptool>. Additional HP Care Pack Services information by product is available at: <http://www.hp.com/hps/carepack>.

NOTE: Certain restrictions and exclusions apply. Consult the HP Customer Support Center for details. <http://h20000.www2.hp.com/bizsupport/TechSupport/ProductRoot.jsp>.

Options

Memory	HP 1 GB (DDR3 1333 MHz)* SODIMM	AT911AA
	HP 2 GB (DDR3 1333 MHz)* SODIMM	AT912AA
	HP 4 GB (DDR3 1333 MHz)* SODIMM	AT913AA
	* All memory modules operate at the maximum system supported speed of 1066 MHz.	
Storage	HP Notebooks USB Diskette Drive	DC361B
	HP External USB 2.0 CD/DVD R/RW Drive	FS943AA
	HP 250GB Pocket Media Drive	FE477AA
	HP 320GB 7200 rpm Primary SATA HDD	AS282AA
Expansion Solutions	HP USB 2.0 Docking Station	FQ834AA
	HP Essential USB 2.0 Port Replicator	AQ731AA
	HP Basic Adjustable Stand	AL549AA
Graphics	HP DisplayPort to VGA Adapter	AS615AA
Power	HP 65W Smart AC Adapter	ED494AA#xxx
	HP 90W Smart AC/Auto/Air Combo Adapter	AJ652AA#xxx
	HP 90W Smart Auto/Truck Adapter	ED493AA
	HP Smart 65W Travel AC Adapter	AU155AA
Carrying Cases	HP Ultra-portable Carrying Case	AL539AA
	HP Basic Carrying Case	AJ078AA
	HP Value Nylon Case	RR314AA
	HP Universal Nylon Case	RR315AA
	HP Executive Leather Case	RR316AA
	HP Deluxe Nylon Backpack	RR317AA
	HP Deluxe Roller Case	GD405AA
	HP Basic Messenger Carrying Case	AP355AA
	HP Basic Backpack	AM863AA
	HP Merlot Slip Case	AU095AA
	HP Professional Series Carrying Case	AT886AA
	HP Professional Series Backpack	AT887AA
	HP Professional Series Messenger	AT888AA
	HP Professional Series Lady's Case	AT889AA
	HP Professional Series Slip Case	AT890AA
	HP Elite Series Lady's Case	AT891AA
HP Professional Series Quick Case	AT892AA	

Options

Security	HP/Kensington MicroSaver Security Lock	PC766A
	HP Privacy Filter	AU649AA
Input/Output Devices	HP USB Keyboard & Mouse Bundle	RC465AA#xxx
	HP USB/PS2 Optical 2-Button Scroll Mouse	DC369A
	HP USB Optical Travel Mouse	RH304AA
	HP Mobile USB 2.0 Speakers	FS944AA
	HP Bluetooth Stereo Headphones	AR085AA
	HP Wireless Optical Mouse	AR084AA
	HP Mobile Audio Speakers	FS944AA
	HP Merlot Special Edition Mouse	AU094AA
HP Merlot Special Edition Mouse Pad	AU096AA	
Wireless	HP un2420 EV-DO/HSDPA Mobile Broadband Module	WD301AA

Memory

Supports 1066/1333 MHz* DDR3 SDRAM
One DIMM slot

Standard Memory 1 GB (1 GB x 1)
 2 GB (2 GB x 1)
 4 GB (4 GB x 1)

Optional Memory Upgrades Memory slot is user accessible. Please refer to the Hardware and Software Guide for installation procedures.

NOTE: Due to the non-industry standard nature of some third-party memory modules, we strongly recommend using only HP branded memory modules to ensure compatibility. Availability of 4 GB of memory requires a Windows 64-bit operating system or Linux. With Windows 32-bit operating systems, memory above 3 GB may not all be available due to system resource requirements.

Memory Upgrades	HP 2 GB (DDR3 1333 MHz)* SODIMM	AT912AA
	HP 4 GB (DDR3 1333 MHz)* SODIMM	AT913AA

* All memory modules operate at the maximum system supported speed of 1066 MHz.

Storage

Internal Storage Device

Hard Drives (2.5-inch SMART SATA II)

160 GB 7200 rpm

Quantity Supported

One

Drive Bay

Dedicated hard drive bay

250 GB 7200 rpm

One

Dedicated hard drive bay

320 GB 7200 rpm

One

Dedicated hard drive bay

Solid State (2.5-inch)

80 GB Solid State Drive

One

Dedicated hard drive bay

128 GB Solid State Drive

One

Dedicated hard drive bay

Technical Specifications

System Unit	Dimensions (HxWxD)	0.93 in x 12.9 in x 8.7 in 23.5 mm x 328 mm x 221 mm
	Weight	Starting from 3.79 lb (1.72 kg)
	NOTE: Starting weight includes 4-cell battery, hard drive, 1 GB memory. Weight varies by configuration and components.	
Stand-Alone Power Requirements (AC Power)	Nominal Operating Voltage	18.5 V
	Average Operating Power	< 15 W
	Max Operating Power	< 65 W
Temperature	Operating	32° to 95° F (0° to 35° C) (not writing optical) 41° to 95° F (5° to 35° C) (writing optical)
	Non-operating	-4° to 140° F (-20° to 60° C)
Relative Humidity	Operating	10% to 90%, non-condensing
	Non-operating	5% to 95%, 101.6° F (38.7° C) maximum wet bulb temperature
Shock	Operating	125 G, 2 ms, half-sine
	Non-operating	200 G, 2 ms, half-sine
Random Vibration	Operating	0.75 grms
	Non-operating	1.50 grms
Altitude (unpressurized)	Operating	-50 to 10,000 ft (-15.24 to 3,048 m)
	Non-operating	-50 to 40,000 ft (-15.24 to 12,192 m)
Industry Standard Certifications	UL	Yes
	CSA	Yes
	FCC Compliance	Yes
	EPEAT	TBD (Gold target)*
	ICES	Yes
	GS	Yes
	Australia / NZ A-Tick Compliance	Yes
	CCC	Yes
	Japan VCCI Compliance	Yes
	MIC	Yes
	BSMI	Yes
	CE Marking Compliance	Yes
	BNCI or BELLIS	Yes
	CIT	Yes
	GOST	Yes
	Saudi Arabian Compliance (ICCP)	Yes
	SABS	Yes
UKRSERTCOMPUTER	Yes	

Technical Specifications

* EPEAT registered where applicable/supported. See epeat.net for registration status by country. EPEAT status listed above applies to U.S.

For accessibility information on HP products, please visit: <http://www.hp.com/accessibility>.

HP 65W Smart AC Adapter	Dimensions	4.17 x 1.85 x 1.1 in (10.6 x 4.7 x 2.8 cm)		
	Weight	0.62 lb (280 g)		
	Input	100 to 240 VAC		
		Input Efficiency	83% min at 115 VAC	
		Input frequency range	47 to 63 Hz	
	Output	Input AC current	1.7 A at 90 VAC, 0.85 A at 180 VAC	
		Output power	65W	
		DC output	18.5V	
		Hold-up time	5 msec at 115 VAC input	
		Output current limit	Output current limit <11A, Over voltage protection- 29V max automatic shutdown	
	Connector	3 pin/grounded, mates with interchangeable cords		
	Environmental Design	Operating temperature	32° to 104° F (0° to 40° C)	
		Non-operating (storage) temperature	-4° to 149° F (-20° to 65° C)	
		Altitude	0 to 10,000 ft (0 to 3,048 m)	
		Humidity	20% to 80%	
EMI and Safety Certifications	Storage Humidity	10% to 90%		
	CE Mark – full compliance with LVD and EMC directives; Worldwide safety standards – IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals – C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE; MTBF – over 200,000 hours at 25°C ambient condition.			

4-Cell (41 WHr) Lithium-ion battery	Dimensions (H x W x L)	0.4 x 3.8 x 8.6 in (0.9 x 9.7 x 21.9 cm)		
	Weight	0.62 lb (0.283 kg)		
	Cells/Type	4-cell Lithium-Ion		
	Energy	Watt-hour Capacity	41 WHr	
	Temperature	Operating (Charging)	32° to 113° F (0° to 45° C)	
		Operating (Discharging)	14° to 140° F (-10° to 60° C)	
		Non-operating	-4° to 140° F (-20° to 60° C)	
Battery Re-Charge Time	System in OFF mode or Standby	2.5 hours to 5 hours		
	System ON	3 to 6.5 hours (depending on system power consumption)		

Technical Specifications

Displays

13.3-inch LED HD (1366 x 768) anti-glare	Dimensions (W x H)	11.53 x 6.49 in (29.3 x 16.5 cm)
	Diagonal Size	13.3 in (33.8 cm)
	Surface Treatment	Anti-glare
	Contrast Ratio	300:1 (typical)
	Refresh Rate	60 Hz
	Brightness	200 nit (typical)
	Pixel Resolution	Pitch 0.215 mm
		Format 1366 x 768
		Configuration RGB Stripe
	Backlight	LED
	PPI	118 ppi
Viewing Angle	±30° Horizontal, ±10° Vertical (minimum) 30/30/20/10 (Left/Right/Down/Up) (minimum) or 45/45/35/25 (Left/Right/Down/Up) (typical)	

13.3-inch LED HD (1366 x 768) BrightView	Dimensions (W x H)	11.53 x 6.49 in (29.3 x 16.5 cm)
	Diagonal Size	13.3 in (33.8 cm)
	Surface Treatment	BrightView (glossy)
	Contrast Ratio	300:1 (typical)
	Refresh Rate	60 Hz
	Brightness	200 nit (typical)
	Pixel Resolution	Pitch 0.215 mm
		Format 1366 x 768
		Configuration RGB Stripe
	Backlight	LED
	PPI	118 ppi
Viewing Angle	±30° Horizontal, ±10° Vertical (minimum) 30/30/20/10 (Left/Right/Down/Up) (minimum) or 45/45/35/25 (Left/Right/Down/Up) (typical)	

Internal Storage

Technical Specifications

128 GB 2.5-inch SATA Solid State Drive	Weight	80.1 Grams		
	Capacity	128 GB		
	Height	0.37 in (9.5 mm)		
	Width	2.75 in (70 mm)		
	Interface	SATA		
	Performance	Maximum Sequential Read	Maximum Sequential Write	
		220 MB/s	200 MB/s	
	Logical Blocks	250,069,680		
Operating Temperature	32° to 158°F (0° to 70°C) [case temp]			
Features	ATA Security; ATA-7 ;SATA 2.6; DIPM			

80 GB 2.5-inch SATA Solid State Drive	Weight	0.19 lbs (86 g)		
	Capacity	80 GB		
	Height	0.37 in (9.5 mm)		
	Width	2.75 in (70 mm)		
	Interface	ATA-7 / SATA 2.6		
	Performance	Maximum Sequential Read	Maximum Sequential Write	
		250 MB/s	70 MB/s	
	Logical Blocks	156,301,488		
Operating Temperature	32° to 158°F (0° to 70°C) [case temp]			
Features	ATA Security			

320 GB 7200 rpm SATA Hard Drive	Drive Weight	0.25 lbs (115 g)	
	Capacity	320 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	Transfer Rate	Synchronous (maximum)	100 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	Single Track	1.5 ms
		Average	11 ms
		Maximum	22 ms
	Rotational Speed	7200 rpm	
	Logical Blocks	625,142,448	
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]	
Features	ATA Security		

Technical Specifications

250 GB 7200 rpm SATA Hard Drive	Drive Weight	0.25 lbs (115g)	
	Capacity	250 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	Transfer Rate	Synchronous (maximum) 100 MB/s (Drive Capability)	
	Seek Time (typical reads, including settling)	Single Track	1.5 ms
		Average	11 ms
		Maximum	22 ms
	Rotational Speed	7200 rpm	
	Logical Blocks	488,397,168	
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]	
	Features	ATA Security	

160 GB 7200 rpm SATA Hard Drive	Drive Weight	0.25 lb (115 g)	
	Capacity	160 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	Transfer Rate	Synchronous (maximum) 100 MB/s (Drive Capability)	
	Seek Time (typical reads, including settling)	Single Track	1.5 ms
		Average	11 ms
		Maximum	22 ms
	Rotational Speed	7200 rpm	
	Logical Blocks	312,581,808	
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]	
	Features	ATA Security	

Audio

Technical Specifications

Hardware	Implementation	IDT HD Audio
	Full Duplex	Yes
	Integrated Dual-Microphone Array	Yes
	Combo stereo headphone/mic jack	

Device Used	Operation
Stereo Headphone	Headphone works. Integrated microphone works.
External PC Microphone	External microphone does not work. Integrated microphone works.
Combo headphone / microphone without "Answer" button	Headphone and microphone in headset work as advertised.
Combo headphone / microphone with "Answer" button	Headphone and microphone in headset work initially whenever headset is plugged in; integrated microphone in PC is disabled. If "answer" button is pushed, microphone in headset is disabled, integrated microphone in PC is enabled.

Audio Output Quality	Frequency Response	20 Hz - 20 kHz
	Signal to Noise Ratio	>85 dB
	Total Harmonic Distortion	0.01%
	Noise Floor	-110 dB
	Play/Record Sampling Rate(s)	8 kHz - 48kHz
	DAC	16, 20 or 24-bit
	ADC	16 or 20-bit

Integrated Stereo Speakers	Power Rating	2 Watts
	Impedance	4 Ohms

Communications

Technical Specifications

Integrated Marvell 10/100/1000 NIC	Ethernet Features	<p>10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14)</p> <p>100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30)</p> <p>1000 Mbit/s operation (1000BASE-T; IEEE 802.3z and 802.3ab; IEEE 802.3 clauses 34-42)</p> <p>Auto-Negotiation (Automatic Speed Selection)</p> <p>Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s</p> <p>IEEE 802.1p QoS (Quality of Service) Support</p> <p>IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable)</p>
	Power Management	<p>ACPI compliant – multiple power modes</p> <p>Situation-sensitive features reduce power consumption</p>
	Performance Features	<p>TCP/IP/UDP Checksum Offload (configurable)</p>
	Manageability	<p>Wake-on-LAN from standby and hibernation (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only)</p> <p>PXE 2.1 Remote Boot</p> <p>Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30))</p> <p>Comprehensive diagnostic and configuration software suite</p>
	Interface	<p>PCI Express x1</p>
	NIC Device Driver Name	<p>Marvell Yukon 88E8072 PCI-E Gigabit Ethernet Controller</p>

HP un2420 EV-DO/HSPA Mobile Broadband Module	Technology/Operating Bands	<p>GSM/GPRS/EDGE: 850MHz(Cell), 900MHz(EGSM), 1800MHz(DCS), 1900MHz (PCS)</p> <p>UMTS/WCDMA with receive diversity: 2100MHz (UTRA FDD Band I), 1900MHz (UTRA FDD Band II), 900MHz (UTRA FDD Band VIII), 850MHz (UTRA FDD Band V)</p> <p>1xEVDO/1xRTT with receive diversity: 850MHz (Band Class0-Cell), 1900MHz (Band Class1-PCS)</p>
	Wireless Protocol Standards	<p>GSM/GPRS/EDGE: Class B, Multi-slot operation, coding schemes CS1 – CS4 and MSC1 – MSC9.</p> <p>UMTS/WCDMA: Release 99 and Release 6</p> <p>CDMA: 1xEVDO Release 0 and Release A, IS-95A, IS-95B, IS-2000</p>
	Wireless Parametric Standards	<p>Meets or exceeds TIA/EIA IS-98-D</p>
	Maximum Data Rates	<p>UMTS (HSPA) – 7.2 Mbps (Download), 2.0 Mbps (Upload)</p> <p>CDMA (EVDO Release A) – 3.1 Mbps (Download), 1.8 Mbps (Upload)</p>
	GPS	<p>Standalone GPS enabled</p>
	GPS Bands	<p>L1 – 1575.42 MHz</p>
	Maximum Output Power	<p>GSM/GPRS/EDGE: 32dBm (+/-1)</p> <p>WCDMA: 24dBm (+/-1)</p> <p>CDMA: 24dBm (+/-1)</p>
	Maximum Power Consumption	<p>2500mA (peak); 1000mA (average)</p>
	Power Consumption, Sleep Mode	<p>5 mA</p>
	Power Management	<p>USB selective suspend</p> <p>Integrated notebook wireless button</p>

Technical Specifications

Antenna Type	Dual high efficiency 5 band antennae with spatial diversity, mounted in the display enclosure
Form Factor	PCI-Express MiniCard, USB 2.0 interface
Weight	11.5 g
Dimensions (Length x Width x Thickness)	2.01 x 1.18 x 0.18 in (51 x 30 x 5 mm)
Voltage, Operating	3.3v +/- 10%
Temperature, Operating (from TIA/EIA/IS-98-D)	-22° to 140° F (-30° to 60° C) (full RF performance) -22° to 167° F (-30° to 75° C) (reduced RF performance)
Temperature, Non-operating, 96 hours (from MIL-STD 202 Method 108)	-40° to 185° F (-40° to 85° C)
Humidity, Non-operating	85% relative humidity for 48 hours @ 185° F (85° C) (non-condensing)
Configuration Utilities	HP Connection Manager
LED Activity	LED Off – Radio Off; Solid LED On – Radio On

Intel WiFi Link 5100

Wireless LAN Standards	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n* * In countries where 802.11n is not allowed, this capability is not enabled.
Interoperability	Wi-Fi certified (802.11abg only) Cisco Compatible Extensions Program compliant (802.11abg only) with Microsoft Windows Vista and XP (details at: http://www.hp.com/go/notebooks/WLAN)
Frequency Band	2.4 GHz and 5 GHz
Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: 66 possible data rates, ranging from 6 Mbps to 300 Mbps, depending on the combination of Bandwidth, Modulation Coding Scheme, and Guard Interval used, as defined in IEEE 802.11n specification
Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM
Security¹	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES (support for key sizes of 128, 192, and 256 bits), 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST. Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.
Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK

Technical Specifications

Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
Roaming	IEEE 802.11 compliant roaming between access points
Output Power (for CCK) ²	15 dBm
Output Power (for OFDM; power varies by data rate) ²	15 dBm
Power Consumption	Transmit: 2.3 Watts (average, with one spatial streams) Receive: 1.9 Watts (average with two receive chains) Idle mode ³ : 30 mW (average) Radio off: 20 mW (max)
Power Management	ACPI compliant power management 802.11 compliant power saving mode
Receiver Sensitivity ⁴	300 Mbps: -68 dBm, 54 Mbps: -74 dBm, 6 Mbps: -90 dBm
Antenna Connections	3 U.FL type connectors, 50 ohm nominal impedance
Form Factor	PCI-Express Half-MiniCard
Weight	0.013 lb (6 g)
Dimensions	0.19 x 1.06 x 1.18 in (4.75 x 26.8 x 30 mm)
Operating Voltage	3.3V +/- 9%, 1.5V +/- 5%
Temperature	Operating 32° to 176° F (0° to 80° C) Non-operating -40° to 176° F (-40° to 80° C)
Humidity	Operating 10% to 90% (non-condensing) Non-operating 5% to 90% (non-condensing)
Altitude	Operating 0 to 10,000 ft (3,048 m) Non-operating 0 to 50,000 ft (15,240 m)
Configuration Utility ⁵	Microsoft Windows XP Choice of Configuration Utility: <ul style="list-style-type: none"> ● Microsoft Windows XP Wireless Network Connection Manager ● Intel PROSet for Microsoft Windows XP (required for Cisco Compatible Extensions support) Microsoft Windows Vista <ul style="list-style-type: none"> ● Microsoft Windows Vista Wireless Network Connection Manager. ● Intel IHV extensions for Windows Vista available to support Cisco Compatible Extensions.
LED Activity	LED Off – Radio OFF; Solid LED On – Radio ON

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. In Power Save Polling mode and on battery power.
4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).
5. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.

Technical Specifications

Intel Centrino Wireless-N 1000	Wireless LAN Standards	IEEE 802.11b IEEE 802.11g IEEE 802.11n* * In countries where 802.11n is not allowed, this capability is not enabled.
	Interoperability	Wi-Fi certified Cisco Compatible Extensions Program compliant with Microsoft Windows Vista and XP
	Frequency Band	2.4 GHz
	Antenna Structure	1 transmit; 2 receive (1x2)
	Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: many possible data rates, ranging from 6 Mbps to 300 Mbps, depending on the combination of Bandwidth, Modulation Coding Scheme, and Guard Interval used, as defined in IEEE 802.11n specification
	Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM
	Security¹	Authentication: WPA and WPA2, 802.1x (EAP_TLS, TTLS, PEAP, LEAP, EAP-FAST) Authentication Protocols: PAP, CHAP, TLS, GTC, MS-CHAP, MS-CHAPv2 Encryption: 64 and 128-bit WEP, AES-CCMP, CKIP, TKIP Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.
	Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
	Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
	Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
	Roaming	IEEE 802.11 compliant roaming between 2.4GHz band Access Points
	Output Power (for CCK and OFDM)²	15 dBm typical
	Power Consumption	Transmit: 1.4 Watts (average, with one spatial streams) Receive: 1.3 Watts (average with two receive chains) Idle mode ³ : 30 mW (average) Radio off: 20 mW (max)
	Power Management	ACPI compliant power management 802.11 compliant power saving mode
	Receiver Sensitivity⁴	54 Mbps: -74 dBm, 6 Mbps: -91 dBm
	Antenna Connections	2 U.FL type connectors, 50 ohm nominal impedance
	Form Factor	PCI-Express Half-MiniCard
	Weight	0.0075 lb (3.4 g)
	Dimensions	0.12 x 1.06 x 1.18 in (3.1 x 26.8 x 30.0 mm)

Technical Specifications

Operating Voltage	3.3V +/- 9%	
Temperature	Operating	32° to 176° F (0° to 80° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 90% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
Configuration Utility⁵	Microsoft Windows XP Choice of Configuration Utility:	
	<ul style="list-style-type: none">● Microsoft Windows XP Wireless Network Connection Manager● Intel PROSet for Microsoft Windows XP (required for Cisco Compatible Extensions support)	
	Microsoft Windows Vista	
	<ul style="list-style-type: none">● Microsoft Windows Vista Wireless Network Connection Manager.● Intel IHV extensions for Windows Vista available to support Cisco Compatible Extensions.	
LED Activity	LED Off – Radio OFF; Solid LED On – Radio ON	
	<ol style="list-style-type: none">1. Check latest software/driver release for updates on supported security features.2. Maximum output power may vary by country according to local regulations.3. In Power Save Polling mode and on battery power.4. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).5. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.	

Broadcom 4312G 802.11b/g WiFi Adapter

Wireless LAN Standards	IEEE 802.11b IEEE 802.11g
Interoperability	Wi-Fi certified Cisco Compatible Extensions Program compliant with Microsoft Windows Vista and XP (details at: http://www.hp.com/go/notebooks/WLAN)
Frequency Band	2.4 GHz
Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM
Security¹	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST. Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.

Technical Specifications

Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.	
Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK	
Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)	
Roaming	IEEE 802.11 compliant roaming between access points	
Output Power (for CCK) ²	17 dBm , nominal	
Output Power (for OFDM; power varies by data rate) ²	15 dBm , nominal	
Power Consumption	Idle associated: 250 mW Idle unassociated: 150 mW Transmit: 2.0 W (max) Receive: 2.0 W (max)	
Power Management	ACPI compliant power management 802.11 compliant power saving mode	
Receiver Sensitivity ³	54 Mbps: -71 dBm, 11 Mbps: -85 dBm , 1 Mbps: -95 dBm	
Antenna type	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure	
Form Factor	PCI-Express Half-MiniCard	
Weight	0.013 lb (6 g)	
Dimensions	0.19 x 1.06 x 1.18 in (4.75 x 26.8 x 30 mm)	
Operating Voltage	3.3v +/- 10%	
Temperature	Operating	14° to 149° F (–10° to 65° C)
	Non-operating	–40° to 176° F (–40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
Configuration Utility ⁴	Microsoft Windows XP Choice of Configuration Utility: <ul style="list-style-type: none"> ● Microsoft Windows XP Wireless Network Connection Manager ● Broadcom Wireless Configuration Utility (required for Cisco Compatible Extensions support) Microsoft Windows Vista <ul style="list-style-type: none"> ● Microsoft Windows Vista Wireless Network Connection Manager ● Broadcom IHV extensions for Windows Vista available to support Cisco Compatible Extensions. 	
LED Activity	LED Off – Radio OFF; Solid LED On – Radio ON	
	<ol style="list-style-type: none"> 1. Check latest software/driver release for updates on supported security features. 2. Maximum output power may vary by country according to local regulations. 3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation). 4. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft 	

Technical Specifications

Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.

Broadcom 4322AGN 802.11a/b/g/n WiFi Adapter	Wireless LAN Standards	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n
	Interoperability	Wi-Fi certified (802.11abg only) Cisco Compatible Extensions Program compliant (802.11abg only) with Microsoft Windows Vista and XP (details at: http://www.hp.com/go/notebooks/WLAN)
	Frequency Band	2.4 GHz and 5 GHz
	Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: 6, 6.5, 9, 12, 13, 13.5, 18, 19.5, 24, 26, 27, 36, 39, 40.5, 48, 52, 54, 58.5, 65, 78, 81, 104, 108, 117, 121.5, 130, 135, 162, 216, 243, 270, 300 Mbps
	Frequency Support	20 MHz: 2.4 GHz and 5 GHz bands 40 MHz: 2.4 GHz and 5 GHz bands
	Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM
	Security¹	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST. Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 4) with Microsoft Windows Vista and XP only.
	Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
	Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
	Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
	Roaming	IEEE 802.11 compliant roaming between access points
	Output Power (for CCK)²	17 dBm
	Output Power (for OFDM; power varies by data rate)²	15 dBm
	Power Consumption	Idle associated: 250 mW Idle unassociated: 150 mW Transmit/Receive 20 MHz channel: 2.0 W (max) Transmit/Receive 40 MHz channel: 2.0 W (max)
	Power Management	ACPI compliant power management 802.11 compliant power saving mode
	Receiver Sensitivity³	270 Mbps: -61dBm, 54 Mbps: -72 dBm, 11 Mbps: -85 dBm, 1 Mbps: -92 dBm
	Antenna type	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure

Technical Specifications

Form Factor	PCI-Express Half-MiniCard	
Weight	0.013 lb (6 g)	
Dimensions	0.19 x 1.06 x 1.18 in (4.75 x 26.8 x 30 mm)	
Operating Voltage	3.3v +/- 10%	
Temperature	Operating	14° to 149° F (–10° to 65° C)
	Non-operating	–40° to 176° F (–40° to 80° C)
Humidity	Operating	10% to 90% (non-condensing)
	Non-operating	5% to 95% (non-condensing)
Altitude	Operating	0 to 10,000 ft (3,048 m)
	Non-operating	0 to 50,000 ft (15,240 m)
Configuration Utility⁴	Microsoft Windows XP Choice of Configuration Utility: <ul style="list-style-type: none">● Microsoft Windows XP Wireless Network Connection Manager● Broadcom Wireless Configuration Utility (required for Cisco Compatible Extensions support) Microsoft Windows Vista <ul style="list-style-type: none">● Microsoft Windows Vista Wireless Network Connection Manager● Broadcom IHV extensions for Windows Vista available to support Cisco Compatible Extensions.	
LED Activity	LED Off – Radio OFF; Solid LED On – Radio ON	
	<ol style="list-style-type: none">1. Check latest software/driver release for updates on supported security features.2. Maximum output power may vary by country according to local regulations.3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).4. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.	

HP Integrated Module with Bluetooth 2.1 Wireless Technology

Bluetooth Specification	2.1 Compliant
Dimensions	1.18 x 0.26 x 0.13 in (30 x 6.5 x 3.25 mm)
Frequency Band	2402 to 2480 MHz
Number of Available Channels	79 (1 MHz) available channels
Data Rates and Throughput	3 Mbps data rate; throughput up to 2.17 Mbps Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric
Transmit Power	–6 dBm to 4 dBm (Bluetooth Class II)
Receiver Sensitivity	Better than –80 dBm at 0.1 % raw bit error rate

Technical Specifications

Power Consumption	Peak (Tx) 264 mW Peak (Rx) 231 mW Sleep <1 mW
Antenna	Internally integrated within module
Range	Up 33 ft (10 m)
Electrical Interface	USB 2.0 compliant Microsoft Windows Plug and Play compliant
Bluetooth Software Supported	Broadcom Bluetooth for Microsoft Windows Bluetooth Software
Link Topology	Point to Point, Multipoint Pico Nets up to 7 slaves
Security	Full support of Bluetooth Security Provisions
Power Management	Microsoft Windows ACPI, and USB Bus Support Self configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff
Certifications	All necessary regulatory approvals for supported countries, including: FCC (47 CFR) Part 15C, Section 15.247 & 15.249 ETS 300 328, ETS 300 826 Low Voltage Directive IEC950 UL, CSA, and CE Mark
Temperature	Operating −4° to 158° F (−20° to 70° C) Non-operating −40° to 176° F (−40° to 80° C)
Humidity	Operating 10% to 90% Non-operating 5% to 95%
Altitude	Operating 15,000 ft (4,572 m) Non-operating 40,000 ft (12,192 m)
Bluetooth Profiles Supported	Serial Port Profile (SPP) ¹ Service Discovery Application Profile (SDAP) Dial-Up Networking (DUN) ^{1,2} Generic Object Exchange Profile (GOEP) ^{1,2} Object Push Profile (OPP) ^{1,2} File Transfer Profile (FTP) Synchronization Profile (SYNC) Hard Copy Cable Replacement (HCRP) ^{1,2} Personal Area Networking Profile (PAN) ^{1,2} Human Interface Device Profile (HID) ^{1,2} FAX Profile (FAX) Basic Imaging Profile (BIP) ² Headset Profile (HSP) Hands Free Profile (HFP) Advanced Audio Distribution Profile (A2DP)

Technical Specifications

¹ indicates the profile is supported by Microsoft Windows XP SP2

² indicates the profile is part of Windows Vista

Environmental Data

Eco-Label Certifications

This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

- US Energy Star
- IT ECO declaration
- EPEAT - Gold

System Configuration

The configuration used for the Energy Consumption and Declared Noise Emissions data for the Convertible Mini tower Desktop model is based on a "Typically Configured Notebook"

Energy Consumption

	115 VAC	230 VAC	100 VAC
Normal Operation	10.33W	10.63W	10.26W
Sleep (Energy Star low power mode)	0.5897W	0.6421W	0.5867W
Off	0.4583W	0.5382W	0.4832W

Heat Dissipation*

	115 VAC	230 VAC	100 VAC
Normal Operation	35 BTU/hr	36 BTU/hr	35 BTU/hr
Sleep	2 BTU/hr	2 BTU/hr	2 BTU/hr
Off	2 BTU/hr	2 BTU/hr	2 BTU/hr

* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)

System Fan Off	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Idle	3.1	26.1
Fixed Disk (random writes)	3.3	26.6

System fan is usually off except when charging the battery

Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater than 5ppm by weight
- Cadmium greater than 10ppm by weight

The battery type and chemistry used in the product is:

Lithium

High capacity Lithium-Ion battery

Additional information

This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.

Technical Specifications

This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.

This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).

This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold level, see: www.epeat.net

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

This product contains 0% post consumer recycled plastic (by wt.)

This product is greater than 93.4% recycle-able when properly disposed of at end of life.

Packaging Materials

- External:
 - Paper 97 g
 - Molded Pulp 90 g
- Internal:
 - Polyethylene low density solid 13 g
 - Polyethylene low density 4 g
- The paper packaging material is made from 80% recycled content.
- The Molded Pulp packaging materials contains at least 80% recycled content.
- The Polyethylene low density solid packaging materials contains at least 100% recycled content.
- The Polyethylene low density packaging materials contains at least 100% recycled content.

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

Material Usage

This product does not contain any of the following substances in excess of

Technical Specifications

regulatory limits (for reference of these limits please refer to the HP General Specification of the Environment:

(http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants - may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde
- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Nickel - finishes must not be used on the external surface designed to be frequently handled or carried by the user.
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) - except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: <http://www.hp.com/go/reuse-recycle> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/recyclers>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

Hewlett-Packard Corporate Environmental Information

For more information about HP's commitment to the environment:

Global Citizenship Report

<http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html>

Environment website

<http://www.hp.com/environment>

Eco-label certifications

<http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html>

ISO 14001 certificates:

<http://www.hp.com/hpinfo/globalcitizenship/environment/operations/>

Technical Specifications

[envmanagement.html](#)

Copyright © 2010 Hewlett-Packard Development Company, L.P.

All rights reserved. Microsoft, Windows, Windows Vista and Windows XP are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Core 2 Duo and Celeron are a registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a registered trademark of Bluetooth SIG, Inc., in the U.S. and other countries. All other product names mentioned herein may be trademarks of their respective companies.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.