


## SureSwipe MSR... Two Heads Are Better Than One.

Introducing the Industry's first stand-alone Magnetic Stripe Reader (MSR) with TWO Magnetic Heads designed to reduce confusion at the Point of Sale.

Featuring a 3-track bi-directional dual sided magnetic reader, the SureSwipe MSR was designed specifically to read any magnetic stripe card regardless of which way the magnetic stripe is facing when swiped. With a 99.9% accuracy rate, the SureSwipe MSR ensures the card data will be read on the first swipe every time.

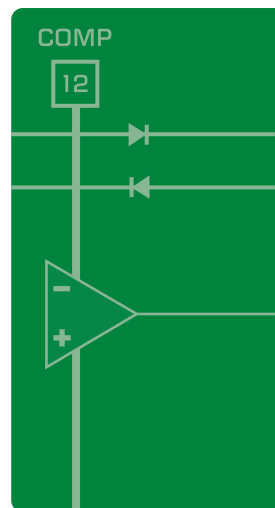

- ▶ The SureSwipe MSR ensures the card data will be read on the first swipe every time.
- ▶ Compatible with MagTek's existing USB MSR readers.
- ▶ Designed and configured to interface seamlessly with leading electronic cash registers, POS terminals and other USB devices.
- ▶ An LED indicator on the top of the reader provides the operator with continuous status of the reader operations.
- ▶ Captures 3 tracks of data from all ISO- and AAMVA-encoded magnetic stripe cards.
- ▶ Available in standard HID and Keyboard Emulation modes.

## Standard Configurations

Reference Standards	ISO 7810 and ISO 7811/AAMVA
Power Input	5V from USB bus
Recording Method	Two-frequency coherent phase (F2F)
Message Format	ASCII
Card Speed	3 - 60 i.p.s. (762 - 1524 cm/s)

## Electrical

Current	Normal: 15 mA Suspend Mode: 200 uA
---------	---------------------------------------

## Mechanical

Size	Length: 3.94 in (100 mm) Width: 1.28 in (32,5 mm) Height: 1.23 in (31,3 mm)
Weight	4.5 oz (127,57 g)
Cable Length	6 ft (1,8 m)
Connector	USB Type A plug

## Environmental

Temperature	Operating: -40°F - 158°F (-40°C - 70°C) Storage: -40°F - 158°F (-40°C - 70°C)
Humidity	Operating: 10% - 90% noncondensing Storage: 10% - 90% noncondensing
Altitude	Operating: 0 - 10,000 ft (0 - 2,048 m) Storage: 0 - 50,000 ft (0 - 15,240 m)

### MagTek® Inc.

1710 Apollo Court  
Seal Beach, CA 90740  
p 562-546-6400  
f 562-546-6301

www.magtek.com  
800-788-6835

Customers First. Quality Always.

REGISTERED TO ISO 9001:2000

