


## Specifications

# SMART Board™ interactive display

## Models 8070i and 8070i-MP

### Physical specifications

<b>Size</b>	66 3/8" W × 40 7/8" H × 9 7/8" D (168.5 cm × 103.8 cm × 25 cm)
<b>Active screen area (maximum interactive projected area)</b>	70" (178 cm) diagonal, 16:9 aspect ratio 61" W × 34 1/4" H (154.9 cm × 87.2 cm)
<b>Weight</b>	262 lb. (119 kg)

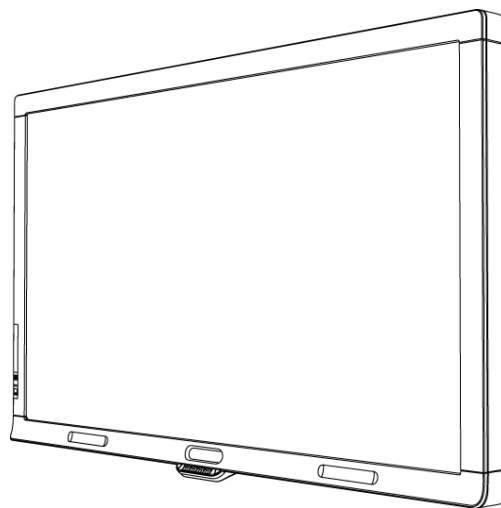

All dimensions +/- 1/8" (0.3 cm). All weights +/- 2 lb. (0.9 kg).

### Shipping size

1 unit on a pallet	22 1/4" W × 54" H × 78" D (57 cm × 139 cm × 198 cm)
2 units on 3 pallets	45" W × 59 3/4" H × 78" D (114 cm × 152 cm × 198 cm)

### Shipping weight

1 unit on a pallet	339 lb. (153.8 kg)
2 units on 3 pallets	723 lb. (328 kg)

Extraordinary made simple™

**SMART**™

## SPECIFICATIONS

SMART Board interactive display – Models 8070i and 8070i-MP

### Standard features

<b>Touch technology</b>	DViT™ (Digital Vision Touch) technology uses digital cameras to track objects interacting with the display surface. Cameras can recognize finger, pen or eraser touch.
<b>Gestures</b>	Supports multitouch gestures
<b>Orientation</b>	The Orientation button on the color select module enables you to adapt the touch control to various screen resolutions.
<b>Pen</b>	The pen communicates with the interactive display to draw digital ink. Buttons on the color select module enable you to select pen color. The bottom frame of the interactive display has magnetic slots for the two included pens.
<b>Eraser</b>	The interactive display has a magnet-mounted eraser.
<b>Keyboard</b>	You can connect a keyboard or press the Keyboard button on the color select module to use the on-screen keyboard.
<b>Product help</b>	The Help button on the color select module enables you to access product help.
<b>Included connectors and hardware</b>	<ul style="list-style-type: none"><li>• 16' 5" (5 m) USB cable</li><li>• VGA cable</li><li>• Infrared remote control</li></ul>
<b>Video and control inputs</b>	<ul style="list-style-type: none"><li>• S-Video</li><li>• RCA video input</li><li>• HDMI™ (× 2)</li><li>• RGB/HV in for guest laptop</li><li>• VGA for room computer</li><li>• Display port</li><li>• DVI-D</li><li>• USB B (× 3)</li><li>• USB A (× 1)</li></ul>
<b>Power</b>	<ul style="list-style-type: none"><li>• AC power inlet</li><li>• AC power pass-through</li></ul>

## SPECIFICATIONS

SMART Board interactive display – Models 8070i and 8070i-MP

### Audio specifications

- Includes two 15 W speakers
- External speaker terminals: 10 W + 10 W with 8  $\Omega$  of resistance

Audio inputs

- USB
- Dual RCA jacks ( $\times$  2)
- Stereo 3.5 mm mini-jack

Audio output

RCA L/R

### Display specifications

Pixel pitch 0.807 mm

Contrast ratio 1300:1

Brightness Maximum 430 cd/m<sup>2</sup>

Horizontal frequency 31.5–91.1 kHz (analog and digital)

Vertical frequency 50–85 Hz

Optimum resolution 1920  $\times$  1080 at 60 Hz

### Warranty

Two-year limited equipment warranty. See your product's warranty documents for more information.

## Installation requirements

- Must be installed by trained professional installers.
- Use a lifting device to lift the interactive display.
- Your installers require a standard VESA® 400 mm  $\times$  400 mm mounting plate (not included) to wall-mount the interactive display.
- Ensure the mounting system can support the product's weight.
- Refer to the *SMART Board 8070i interactive display installation guide* ([smarttech.com/kb/155314](http://smarttech.com/kb/155314)) for more information.

## SPECIFICATIONS

SMART Board interactive display – Models 8070i and 8070i-MP

### Computer requirements

You need to connect a computer to the interactive display. Choose one of the following:

#### SMART Board 8070i-MP interactive display

- A computer with a Windows® operating system and SMART Meeting Pro™ software installed. For a complete list of computer requirements, see the SMART Meeting Pro software release notes ([smarttech.com/kb/141332](http://smarttech.com/kb/141332)).
- A laptop with a Windows operating system that doesn't have SMART Meeting Pro software installed. You can connect this laptop to the interactive display using the included SMART GoWire™ auto-launch cable with SMART Meeting Pro software. For a complete list of computer requirements, see the SMART GoWire specifications ([smarttech.com/kb/151506](http://smarttech.com/kb/151506)).

#### SMART Board 8070i interactive display

A computer with either a Windows operating system or Mac OS operating system software and SMART Notebook™ collaborative learning software installed. For a complete list of computer requirements, see the SMART Notebook software release notes ([smarttech.com/kb/126571](http://smarttech.com/kb/126571)).

### Storage and operating requirements

#### Power requirements (LCD panel)

9.2A to 3.7A at 100V to 240V AC, 50 Hz to 60 Hz

#### Power consumption at 77°F (25°C)

Typically up to 530 W (brightness at 70% and volume at 40), maximum 580 W (brightness and volume at maximum)

#### Operating temperature

41°F to 95°F (5°C to 35°C)

#### Storage temperature

-4°F to 140°F (-20°C to 60°C)

#### Humidity

5% to 80% relative humidity, non-condensing

#### CAUTION

The interactive display is intended for indoor use. Do not pour or spray liquids onto your product's electronic components.

## SPECIFICATIONS

SMART Board interactive display – Models 8070i and 8070i-MP

**Ventilation requirements** Maintain a 4" (10 cm) ventilation area around your interactive display to enable its cooling fans to operate. Do not store or operate your interactive display in dusty environments because dust could interfere with the product's ventilation and cooling.

## Environmental

**Electrostatic discharge (ESD)**

- Designed to withstand electrostatic shock
- EN61000-4-2 severity level 3 for direct and indirect ESD ( $\pm 4$  kV Contact /  $\pm 8$  kV Air)

**Conducted and radiated emissions**

- FCC part 15 Class A
- EN55022 / CISPR 22
- KN55022

### Flammability rating

Electronics and connectors UL 94-V0

Mechanical parts UL 94-HB

USB cable UL VW-1 / CSA FT4

**Environmental compliance** CPSIA, EU RoHS and WEEE

**Regulatory certification** CB report, CSA/C-UL, C-Tick-A, Doc-A, FCC-A, KC, KCC, TUV-GS and UL

## SMART order numbers

**SBID 8070i-MP** SMART Board interactive display. Includes a SMART Meeting Pro software license key and a SMART GoWire auto-launch cable for SMART Meeting Pro software.

**SBID 8070i** SMART Board interactive display. Includes a SMART Notebook software installation CD.

## Optional accessories


**GW-MP** SMART GoWire auto-launch cable. This USB to USB connection enables you to use SMART Meeting Pro software on computers where the software is not installed.

## SPECIFICATIONS

SMART Board interactive display – Models 8070i and 8070i-MP

- WMB-SBID** 16' 5" (5 m) wire bundle to connect the interactive display to a nearby laptop. Includes a USB cable and a VGA-to-RGB cable.
- RPEN-SBID** Replacement pen for your SMART Board 8000 series interactive display
- RERASER-SBID** Replacement eraser for your SMART Board 8000 series interactive display

## Physical dimensions

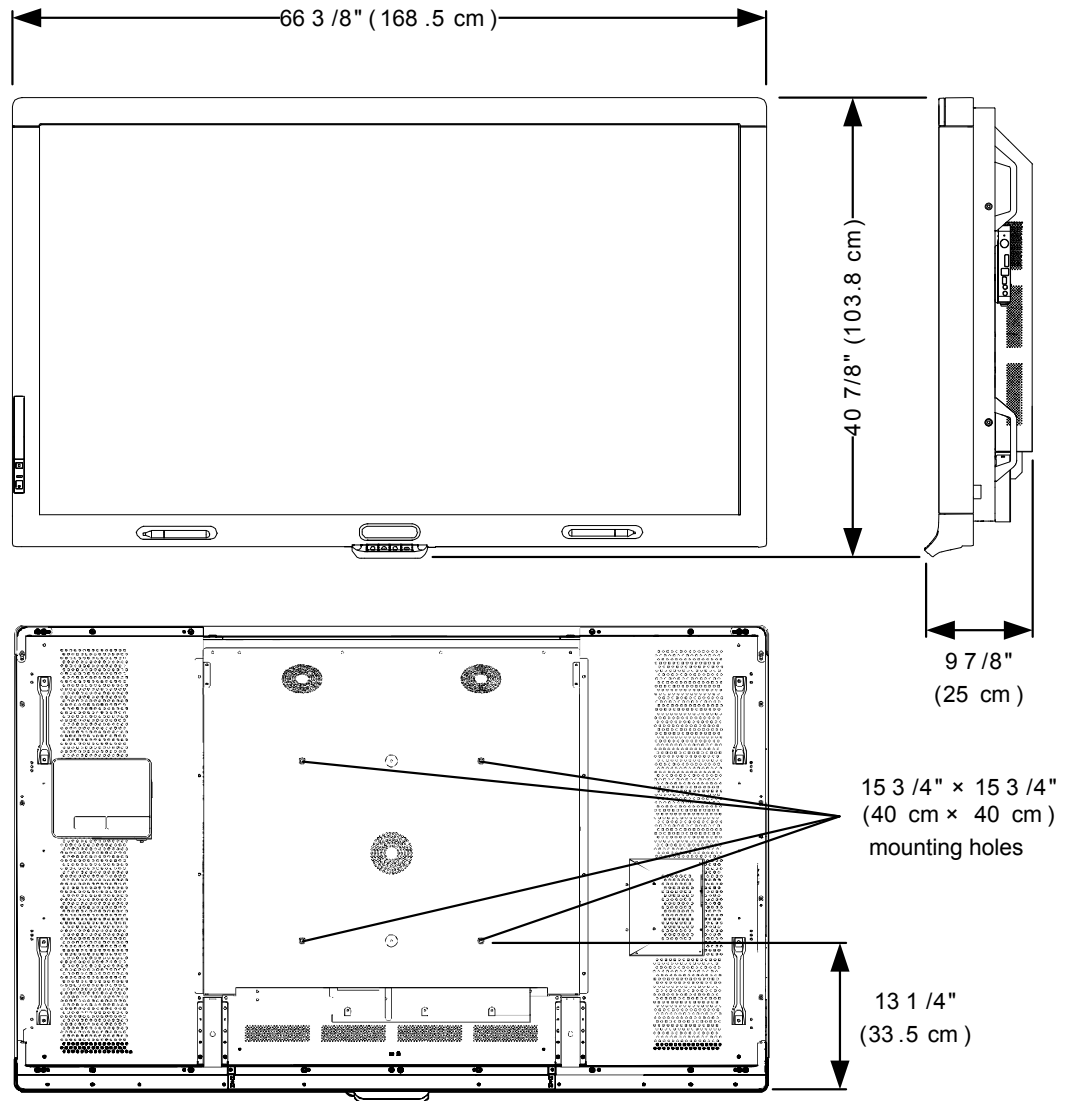

## **SPECIFICATIONS**

SMART Board interactive display – Models 8070i and 8070i-MP

---

[www.smarttech.com/support](http://www.smarttech.com/support) | [www.smarttech.com/contactsupport](http://www.smarttech.com/contactsupport)  
Support +1.403.228.5940 or Toll Free 1.866.518.6791 (U.S./Canada)

© 2010–2011 SMART Technologies ULC. All rights reserved. SMART Board, smarttech, DVIT, SMART Meeting Pro, SMART Notebook, SMART GoWire, the SMART logo and all SMART taglines are trademarks or registered trademarks of SMART Technologies ULC in the U.S. and/or other countries. All third-party product and company names may be trademarks of their respective owners. One or more of the following patents: US6320597; US6326954; US6563491; US6741267; US6803906; US6829371; US6947032; US6954197; US6972401; US7151533; US7236162; US7411575; US7619617; US7643006; US7692656; US7755613; US7757001; US7880720; USD612396; USD616462; USD617332; USD636784. Other patents pending. Contents are subject to change without notice. 11/2011.