



WI060 Digital Projector


Highlights

- Ideal for Home Entertainment
- Easy setup
- Easy Maintenance

Projection System	DLP		
Native Resolution	1080p(1920x1080)		
Brightness	2000 ANSI lumens		
Contrast Ratio	5000:1		
Display Color	1.07 Billion Colors		
Lens	F=2.50~2.76, f=23.5~28.2mm		
Aspect Ratio	Native 16:9 (5 aspect ratio selectable)		
Throw Ratio	1.59-1.9 (56.8"@2m)		
Image Size (Diagonal)	28" to 300"		
Zoom Ratio	1.20:1		
Lamp Type	190W		
Lamp (Normal/Economic Mode)*	4500/6000 hours		
Keystone Adjustment	1D, Vertical +/- 40 degrees		
Projection Offset	130%+-5%		
Resolution Support	VGA(640 x 480) to WUXGA1080p(1920 x 1200)		
Horizontal Frequency	31K~90KHz		
Vertical Scan Rate	48~86Hz		
Compatibility	HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p	
	Video Compatibility	NTSC, PAL, SECAM	
Interface	Computer in (D-sub 15pin)	x 1	
	Composite Video in (RCA)	x 1	
	S-Video in (Mini DIN 4pin)	x 1	
	Component Video in	x 1 (RCA x 3)	
	Audio in (Mini Jack)	x 1	
	Audio L/R in (RCA)	x 2	
	Audio out (Mini Jack)	x 1	
	Speaker	10W x 1	
	HDMI V1.3	x 2	
	USB (Type Mini B)	x 1 (USB Download & Page up/down)	
	RS232 (DB-9pin)	x 1	
Dimensions	Dimensions(W x H x D)	330 x 247 x 150 mm	
	Weight	3.6 kg (7.9lbs)	
Power	Power Supply	100 to 240 VAC, 50 to 60 Hz	
	Power Consumption	270W, Standby<1W	
Audible Noise	31/28 dBA (Normal/Economic mode)		
On-Screen Display Languages	Bulgarian/ Croatian/ Czech/ Danish/ Dutch/ English/ Finnish/ French/ German/ Greek/ Hungarian/Italian/ Indonesian/ Japanese/ Korean/ Norwegian/ Polish/ Portuguese/ Romanian/ Russian/ Simplified Chinese/Spanish/ Swedish/ Turkish/ Thai/ Traditional Chinese (26 Languages)		
Picture Modes	Bright/Living Room/Gaming/Cinema/User 1/User 2/User3		
Accessories	Standard	Optional	
	Remote Control w/ Battery	Spare Lamp Kit	P/N: 5JJ5405.001
	Power Cord (by region)	Ceiling Mount	P/N: 5JJ2K01.001
	User Manual CD		
	Quick Start Guide		
	Warranty Card (by region)		
	VGA(D-sub 15pin) Cable		
	Carry Bag		

*Lamp life results will vary depending on environmental conditions and usage. Actual product's features and specifications are subject to change without notice.

Distance Chart

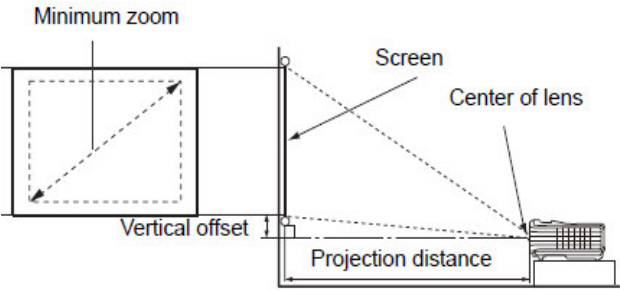


16:9 screen				Recommended projection distance from screen in mm			Vertical offset in mm
diagonal	Width	Height	Min length (with max zoom)	Average	Max length (with min zoom)		
Inches	mm	mm					
30	762	664	374	1056	1162	1267	56
40	1016	886	498	1408	1549	1690	75
50	1270	1107	623	1760	1936	2112	93
60	1524	1328	747	2112	2323	2534	112
80	2032	1771	996	2816	3098	3379	149
100	2540	2214	1245	3520	3872	4224	187
120	3048	2657	1494	4224	4646	5069	224
150	3810	3321	1868	5280	5808	6336	280
200	5080	4428	2491	7040	7744	8448	374
220	5568	4870	2740	7744	8518	9293	411
250	6350	5535	3113	8800	9680	10560	467
300	7620	6641	3736	10560	-	-	560

Wall mount/Ceiling mount Chart

Ceiling mount screws:

M4 x L8 (Max. L = 12 mm, Min. L = 8 mm)

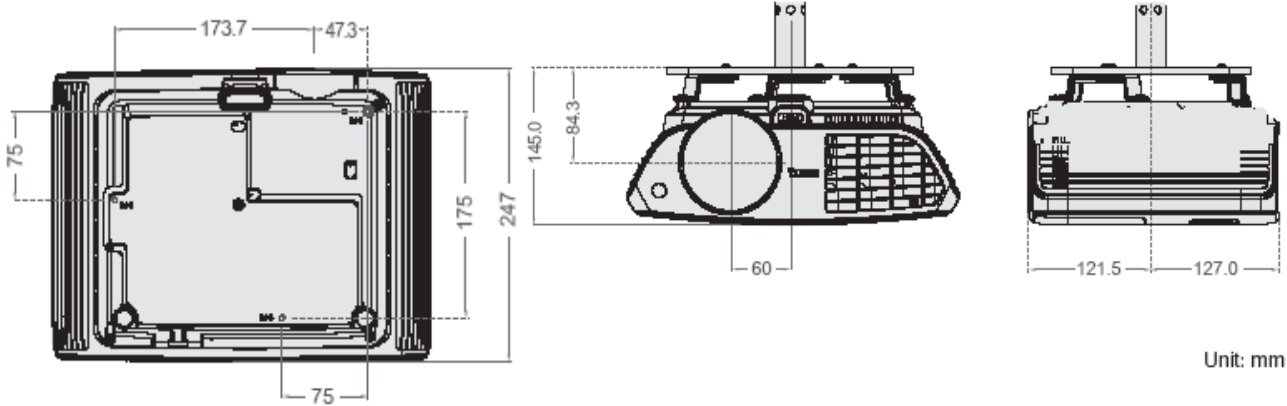

Dimension

