

Single Badge Solutions for Identification and Access

## AIR ID® Playback

No-software reader for reading user data from memory of contactless smart cards



### Overview

AIR ID products meet a variety of needs in multiple situations. AIR ID products leverage current HID *iClass* and NXP MIFARE badge investments and existing control systems while expanding technologies and applications with a single badge solution.

The AIR ID Playback interfaces contactless cards to existing applications and systems without the need to change or update these systems. There is no need to deploy software. The plug-and-play AIR ID Playback reader delivers user data from the contactless card to the desired application or machine. Data may be written to the card using the AIR ID Writer. In many cases, the Playback reader can be configured to read data already on the card. The reader is instantaneously configurable, allowing users to change the location being read on the contactless card. There is no need for pilot tests, training, software updates, technical support, licenses or the hassle of incompatibilities since no software is deployed. This multi-application reader delivers strong benefits to the user: easy plug-and-play, contactless operation, and cost savings.

### Applications

- PC/LAN or application log-on
- Time and attendance
- Employee identification
- Mag-stripe and bar-code replacement
- Form filler to existing software applications
- Truck scales
- PLC and embedded controllers
- Point-of-sale/vending

## AIR ID Playback

### Features

**No software required on server or client:** Utilizes a plug-n-play USB, RS-232 or Wiegand output

**Multi-application solution:** Allows for several applications to be stored on a single contactless credential

**Security:** AIR ID contactless cards offer unique features such as cryptographic data storage, mutual authentication, secure reading/writing of data and user defined access keys


**As a logical access solution, it helps meet medical/healthcare HIPAA requirements**

**AIR ID Playback USB seamlessly interfaces with any system or existing software:** Playback reads and sends back as keystrokes. User data provides seamless integration can be used for a one or two-factor logon application

**AIR ID Playback RS-232 reader easily interfaces to existing software, PLCs, point-of-sale terminals and other equipment:** The Playback Reader sends data as ASCII characters

**AIR ID Playback Wiegand easily outputs data to any device accepting Wiegand data**

**Platform independent and versatile:** Supports any operating system with USB, Windows® 2000/XP, Citrix®, UNIX®, Linux, Vista, Macintosh, thin clients and more

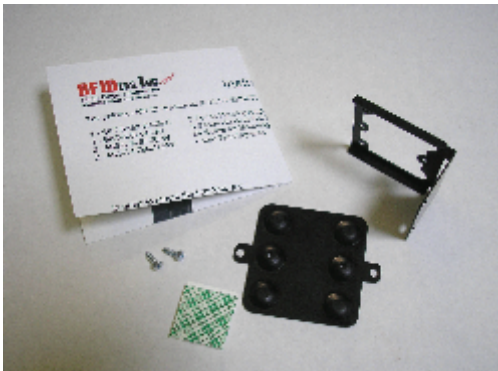

AIR ID bracket kit  
KT-SHBKT

### Specifications

#### Typical maximum read range:

- 2.0" – 4.0" (5.0 – 10.0 cm) with PVC ID cards
- 1.0" – 1.5" (2.5 – 3.8 cm) with key fobs

**Dimensions:** 3 3/8" x 2" x 0.6" (Models with RDR in part number only) 4.2" x 2.5" x 0.875" (10.6 x 6.35 x 2.2 cm)

**Weight:** 0.45 lb. (12.7g)

#### Power requirements and interface:

- Nominal input: 5 Vdc
- USB Model: via USB cable
- RS-232 model: via a pass-thru PS/2 connector or power supply adapter

**Indicators:** Tri-state LED, beeper

**Transmit frequency:** 13.56 MHz

**Operating temperature range:** -22° to 150°F (-30° to 65°C)

**Operating humidity range:** 5% to 95% relative humidity, non-condensing

**Certifications:** FCC, CE, C-tic, RoHS

### Part Numbers for Playback Reader

Type	USB	RS-232	Wiegand
iClass	RDR-7085AKU	RDR-7085AK2	RDR-7085AKW
MIFARE	RDR-7585AKU	RDR-7585AK2	RDR-7585AKW