


AXIS T91B47

Pole mount for different pole diameters

AXIS T91B47 Pole Mount is designed for both indoor and outdoor use. It is available in two versions with different lengths of marine-grade (SS316L) stainless steel straps. One version for poles with diameter between 50–150 mm (2–6 in), and one for poles with diameter between 100–410 mm (4–16 in) in diameter. Additionally, it can be used for attaching cameras to beams. When AXIS T91B47 is used for Axis fixed dome or fixed bullet cameras, no additional accessories such as pendant kits are required, ensuring a cost-efficient solution.

- > Suitable for a wide range of pole diameters
- > Safe and easy to install
- > IK10-rated vandal resistance
- > NEMA 4X-rated corrosion protection
- > Axis stainless steel (SS316L) straps included

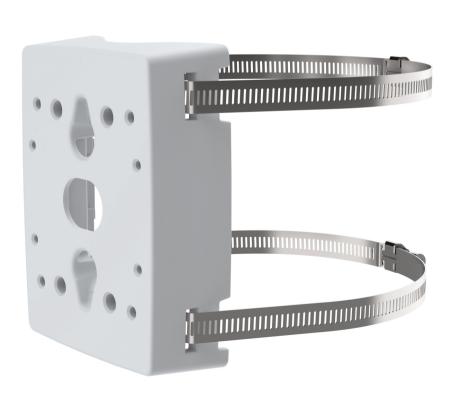



www.cxis.com T10125905/EN/M1.4/1803

	AXIS :	Г91В47
Models	AXIS T91B47 Pole Mount 50–150 mm AXIS T91B47 Pole Mount 100–410 mm	Sustainabili
General		
Supported products	Compatible Axis network cameras: Outdoor fixed box cameras: AXIS M11/P13/Q16 Series Fixed bullet cameras: AXIS P14/Q17 Series Fixed dome cameras: AXIS M30/P32/P33/Q35/Q36 Series Thermal cameras: AXIS Q19/Q29 Series Compatible Axis accessories: AXIS T91E61 Wall Mount	Approvals
	AXIS T94Q01A Wall Mount	Dimensions
	AXIS P33 Mounting Bracket AXIS T92E Housing Series	Weight
	AXIS 192E Housing Series AXIS 193F Housing Series AXIS 193G05 Protective Housing	Included accessories
Pole diameter	AXIS T91B47 Pole Mount 50–150 mm: 50–150 mm (2–6 in) AXIS T91B47 Pole Mount 100–410 mm: 100–410 mm (4–16 in)	Warranty
Maximum load	15 kg (33 lb)	a. Corrosion
Cable routing	Back: Cable hole Side: U-shaped cable hole (26 mm/1 in)	Environmenta
Casing	NEMA 4X- and IK10-rated powder-coated aluminum mount Color: white NCS S 1002-B	www.axis.com

Sustainability	PVC free
Environment	Indoor
	Outdoor
Approvals	Safety
	IEC/EN/UL 60950-1, IEC/EN/UL 60950-22
	Environment
	EN 50581, NEMA 250 Type 4X ^a
	Impact
	IEC 62262 IK10
Dimensions	111 x 42 x 147 mm (4 3/8 x 1 5/8 x 5 13/16 in)
Weight	0.3 kg (0.7 lb) without steel straps
Included	Installation Guide
accessories	Cable ties, Screws
	Stainless steel straps
Warranty	Axis 3-year warranty, see www.axis.com/warranty
a. Corrosion prote	ected only

Environmental responsibility:

www.axis.com/environmental-responsibility

