

MGate MB3180/MB3280/MB3480 Series

1, 2, and 4-port standard serial-to-Ethernet Modbus gateways



Features and Benefits

- Supports Auto Device Routing for easy configuration
- Supports route by TCP port or IP address for flexible deployment
- Converts between Modbus TCP and Modbus RTU/ASCII protocols
- 1 Ethernet port and 1, 2, or 4 RS-232/422/485 ports
- 16 simultaneous TCP masters with up to 32 simultaneous requests per master
- Easy hardware setup and configuration

Certifications



Introduction

The MB3180, MB3280, and MB3480 are standard Modbus gateways that convert between Modbus TCP and Modbus RTU/ASCII protocols. Up to 16 simultaneous Modbus TCP masters are supported, with up to 31 RTU/ASCII slaves per serial port. For RTU/ASCII masters, up to 32 TCP slaves are supported.

Standard Modbus Network Integration

The three standard MGate™ models (MB3180, MB3280, and MB3480) are designed for easy integration of Modbus TCP and RTU/ASCII networks. With these models, Modbus serial slave devices can be seamlessly incorporated into an existing Modbus TCP network, and Modbus TCP slaves can be made accessible to serial masters. The MB3180, MB3280, and MB3480 offer features that make network integration easy, customizable, and compatible with almost any Modbus network.

High Density, Cost-Effective Gateways

The MGate™ MB3000 gateways can effectively connect a high density of Modbus nodes to the same network. The MB3280 can manage up to 62 serial slave nodes, and the MB3480 can manage up to 124 serial slave nodes. Each RS-232/422/485 serial port can be configured individually for Modbus RTU or Modbus ASCII operation and for different baudrates, allowing both types of networks to be integrated with Modbus TCP through one Modbus gateway.

Auto-Device Routing for Easy Configuration (Patent Pending)

Moxa's Auto-Device Routing function helps eliminate many of the problems and inconveniences encountered by engineers who need to configure large numbers of Modbus devices. A single mouse click is all that's required to set up a slave ID routing table and configure Modbus gateways to automatically detect Modbus requests from a supervisory control and data acquisition (SCADA) system. By removing the need to manually create the slave ID routing table, the Auto-Device Routing function saves engineers significant time and cost.

Specifications

Ethernet Interface

10/100BaseT(X) Ports (RJ45 connector) 1 (Auto MDI/MDI-X connection)

Magnetic Isolation Protection 1.5 kV (built-in)

Ethernet Software Features

Configuration Options Web Console (HTTP), Device Search Utility (DSU), MGate Manager, Telnet Console

Industrial Protocols Modbus TCP Client (Master), Modbus TCP Server (Slave)

Management SNMPv1

Serial Interface

No. of Ports	MGate MB3180: 1 MGate MB3280: 2 MGate MB3480: 4
Connector	DB9 male
Serial Standards	R2-232/422/485 (software selectable)
Baudrate	50 bps to 921.6 kbps
Data Bits	7, 8
Parity	None, Even, Odd, Space, Mark
Stop Bits	1, 2
Flow Control	DTR/DSR, RTS Toggle (RS-232 only), RTS/CTS
RS-485 Data Direction Control	ADDC® (automatic data direction control)
Pull High/Low Resistor for RS-485	1 kilo-ohm, 150 kilo-ohms
Terminator for RS-485	MGate MB3180: None MGate MB3280/MB3480: 120 ohms

Serial Signals

RS-232	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
RS-422	Tx+, Tx-, Rx+, Rx-, GND
RS-485-2w	Data+, Data-, GND
RS-485-4w	Tx+, Tx-, Rx+, Rx-, GND

Serial Software Features

Industrial Protocols	Modbus RTU/ASCII Master, Modbus RTU/ASCII Slave
----------------------	---

Modbus (Transparent)

Max. No. of Client Connections	16
Max. No. of Server Connections	32

Power Parameters

Input Voltage	12 to 48 VDC
Input Current	MGate MB3180: 200 mA @ 12 VDC MGate MB3280: 250 mA @ 12 VDC MGate MB3480: 385 mA @ 12 VDC
Power Connector	MGate MB3180: Power jack MGate MB3280/MB3480: Power jack and terminal block

Physical Characteristics

Housing	Metal
IP Rating	IP30
Dimensions (with ears)	MGate MB3180: 22 x 75 x 80 mm (0.87 x 2.95 x 3.15 in) MGate MB3280: 22 x 100 x 111 mm (0.87 x 3.94 x 4.37 in) MGate MB3480: 35.5 x 102.7 x 181.3 mm (1.40 x 4.04 x 7.14 in)

Dimensions (without ears)	MGate MB3180: 22 x 52 x 80 mm (0.87 x 2.05 x 3.15 in) MGate MB3280: 22 x 77 x 111 mm (0.87 x 3.03 x 4.37 in) MGate MB3480: 35.5 x 102.7 x 157.2 mm (1.40 x 4.04 x 6.19 in)
Weight	MGate MB3180: 340 g (0.75 lb) MGate MB3280: 360 g (0.79 lb) MGate MB3480: 740 g (1.63 lb)

Environmental Limits

Operating Temperature	0 to 60°C (32 to 140°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

Standards and Certifications

Safety	EN 60950-1, UL 60950-1
EMC	EN 55032/24
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 4 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 GHz: 3 V/m IEC 61000-4-4 EFT: Power: 1 kV; Signal: 0.5 kV IEC 61000-4-5 Surge: Power: 1 kV (MB3180/MB3280) IEC 61000-4-5 Surge: Power: 1 kV; Signal: 2 kV (MB3480) IEC 61000-4-6 CS: 3 V IEC 61000-4-8 PFMF IEC 61000-4-11 DIPs

MTBF

Time	MGate MB3180: 908,440 hrs MGate MB3280: 749,455 hrs MGate MB3480: 1,242,173 hrs
Standards	Telcordia SR332

Warranty


Warranty Period	5 years
Details	See www.moxa.com/warranty

Package Contents

Device	1 x MGate MB3180/MB3280/MB3480 Series gateway
Power Supply	1 x power adapter, suitable for your region
Documentation	1 x document and software CD 1 x quick installation guide 1 x warranty card

Dimensions

Unit: mm (inch)

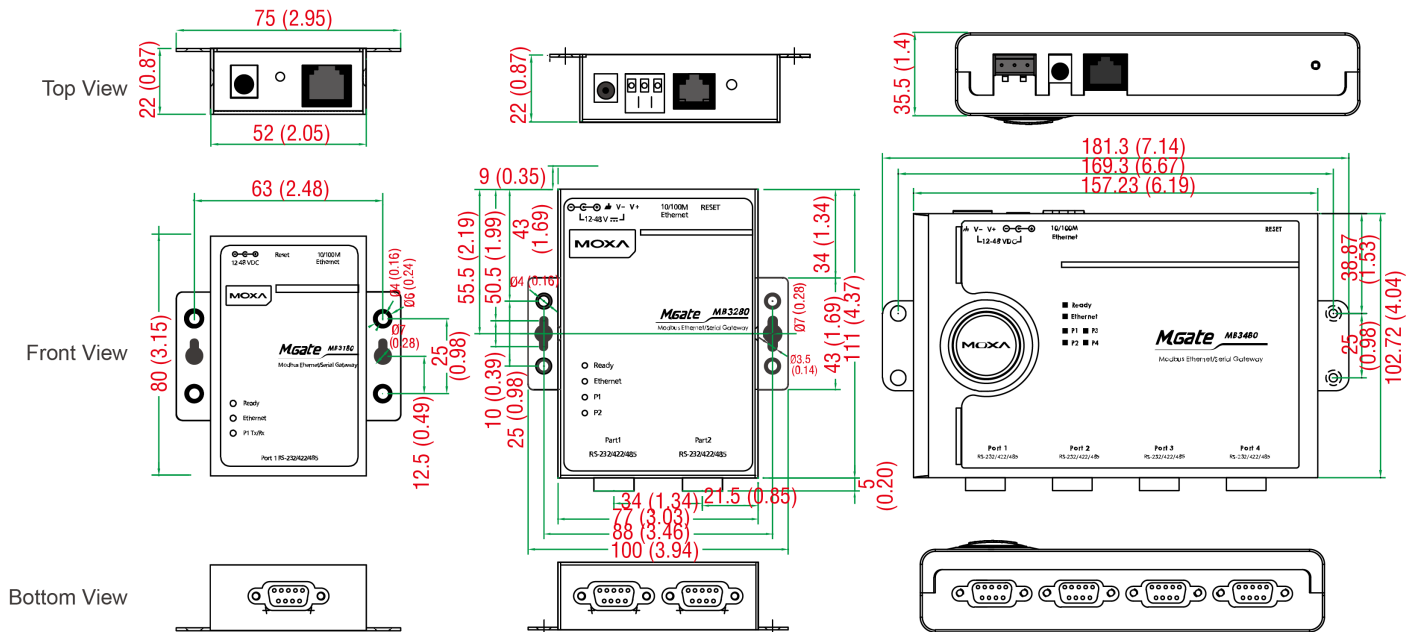

Ordering Information

Model Name	No. of Serial Ports
MGate MB3180	1
MGate MB3280	2
MGate MB3480	4

Accessories (sold separately)

Cables

CBL-F9M9-150	DB9 female to DB9 male serial cable, 1.5 m
CBL-F9M9-20	DB9 female to DB9 male serial cable, 20 cm

Connectors

Mini DB9F-to-TB	DB9 female to terminal block connector
-----------------	--

DIN-Rail Mounting Kits

DK35A	DIN-rail mounting kit, 35 mm
-------	------------------------------

Wall-Mounting Kits

WK-35-01	Wall-mounting kit, 2 plates, 6 screws, 35 x 44 x 2.5 mm
----------	---

Power Adapters

PWR-12050-WPAU-S2	Non-locking barrel plug, 12 VDC, 0.5 A, 100-240 VAC, Australia (AU) plug, 0 to 40°C operating temperature
PWR-12050-WPCN-S2	Non-locking barrel plug, 12 VDC, 0.5 A, 100-240 VAC, China (CN) plug, 0 to 40°C operating temperature
PWR-12050-WPEU-S2	Non-locking barrel plug, 12 VDC, 0.5 A, 100-240 VAC, Continental Europe (EU) plug, 0 to 40°C operating temperature

PWR-12050-WPUK-S2	Non-locking barrel plug, 12 VDC, 0.5 A, 100-240 VAC, United Kingdom (UK) plug, 0 to 40°C operating temperature
PWR-12050-WPUSJP-S2	Non-locking barrel plug, 12 VDC, 0.5 A, 100-240 VAC, United States/Japan (US/JP) plug, 0 to 40°C operating temperature

© Moxa Inc. All rights reserved. Updated Jan 18, 2019.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.