


Date: 04/16/2009

NO.:

Customer	Sweden Direktronik	RoHS	Yes
Product Name	Designated Power Distribution Unit for Cabinet	Customer's Code	
Part Number	16-8405	Picture Code	
No.	Item	Detailed Description	
1	Product Series		
2	Socket Type	DIN49440 16A Socket[7];	
3	Socket Quantity	7	
4	Power Input	Left end single input	
5	Bracket Install	Frontal installation	
6	Cable with plug	IEC320 C14 10A plug	
7	Control Function	No controlling function	
8	Protection Function	CR32 digital ammeter	
9	Case	Black	
10	Cable Specification	3 x 1.0 mm ² x 2M	
11	Product Size	L x W x H = 482.6 x 68 x 44.4 mm	
12	Mounting Length	465 mm	
13	Case Length	429.5 mm	
14	PDU Exponent	0.778	
15	Fittings	2pcs $\phi 6 \times 16$ mm cross bolt, 2pcs M6 float nut	
16	Product Label	Product Name	Designated Power Distribution Unit for Cabinet
		Specification Model	16-8405
		Rating voltage	250VAC 50/60Hz
		Rating Current	10A
		Max. Current	
		Max. Power	2500 W
		Safety Authentication	CE
		Logo	RoHS
	Producer		
No.	Add-In		
1	Socket assemble	No	
2	Interior Connection Wire	Combined copper	
3	Interior Connection Style	Standard connection	
4	Fix the Cable	Small cable clamp	
5	Module Assemble (form left to right)	Please see the following picture	
6	Others	No	
Made by: Peter		Customer confirm:	Check:
			Authorize:

This technology specification is for: design product for customer and confirm customer's requirements, and is also the basic gist for arranging production.

Preview

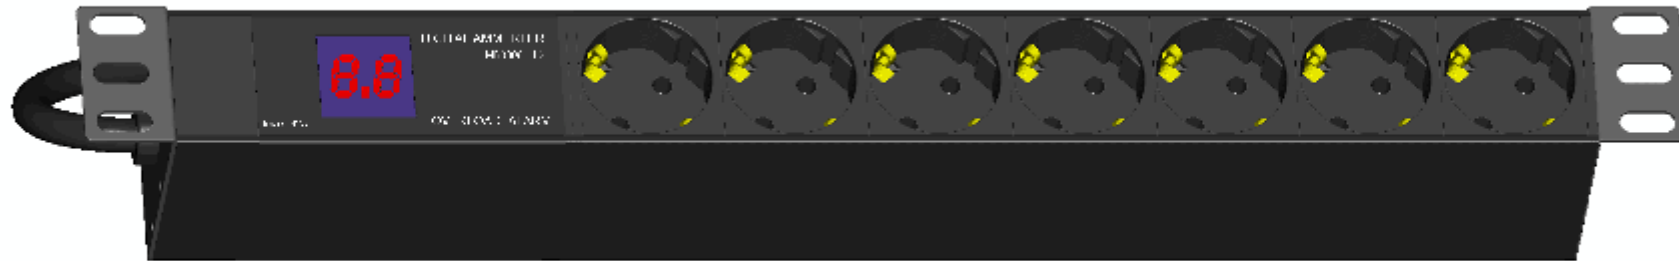

IEC320 C14 10A plug

DIREKTRONIK

Direktronik AB tel. 08-52 400 700 www.direktronik.se

DIMENSION AND TOLERANCES (Unit: mm)				
Length: 482.6	Mounting length: 465		Customer	Sweden Direktronik
Width: 68	Case length: 429.5		Product name	Designated Power Distribution Unit for Cabinet
Height: 44.4	case tolerance: ± 1.0		Part number	16-8405
	SIGN	DATE	Customer's code	
DRAWN	Peter	04/16/2009	Drawing number	
CHK'D			Edition number	
APP'D				

Date: 04/16/2009

NO.: