

TRM250

INDUSTRIAL RUGGED LTE CAT-M1/NB-IoT/EGPRS MODEM

TRM250 is an Industrial Cellular modem with multiple LPWAN connectivity options. It features NB-IoT, LTE Cat-M1 and is backwards compatible to EGPRS (2G). It offers extremely long lifecycle and is the most flexible option when upgrading connectivity of existing industrial equipment. TRM250 is equipped with USB interface and rugged aluminium housing and is designed for large scale IIoT deployments.



LTE Cat M1 / Cat NB1 /
EGPRS Communication



Rugged aluminium housing



Device is accessible and
configurable via USB



Low power consumption



Compact size, easy integration



External antenna for better
signal coverage

EFFICIENT



- Low power consumption
- Compact size
- Accessible & configurable via USB

PERFORMANCE

- EGPRS/LTE Cat1/NB-IoT
- Rugged Housing
- External antenna

SCALABLE

- Cost Efficient
- Easy to deploy
- Easy to use

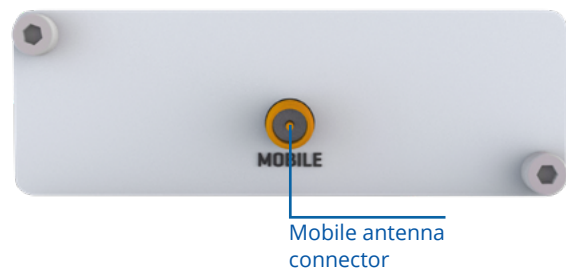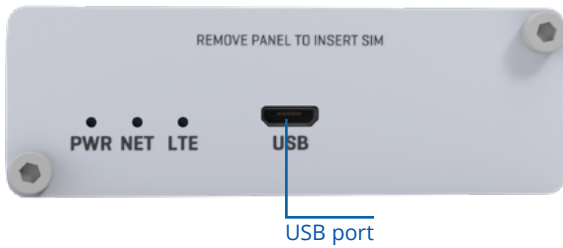

Hardware

Mobile	LTE (Cat-M1) / NB-IoT / EGPRS
SIM slot	Mini SIM (2FF)
Antenna connector	1 x SMA
Operating Voltage	5V - powered via microUSB
Configuration interface	microUSB
LED indicators	Power and Network status LEDs
Operating temperature	-40 °C to 75 °C
Operating humidity	10 % to 90 % non-condensing
Casing material	Aluminium housing
Ingress Protection Rating	IP30
Dimensions	74,5 x 64,5 x 25mm
Weight	130 g

Software

Management software	Windows Connection Manager (NDIS driver)
USB Serial Driver	Windows 7/8/8.1/10, Linux 2.6/3.x/4.1~4.14, Android 4.x/5.x/6.x/7.x/8.x
RIL Driver	Android 4.x/5.x/6.x/7.x/8.x
NDIS Driver	Windows 7/8/8.1/10
Gobinet Driver	Linux 2.6/3.x/4.1~4.14
QMI_WWAN Driver:	Linux 3.x(3.4 or later)/4.1~4.14
Protocols	PPP/TCP/UDP/SSL/TLS/FTP(S)/HTTP(S)/NITZ/PING/MQTT

Interfaces

Management interface	AT Commands (3GPP TS27.007, 3GPP TS27.005) Hayes AT Command set Enhanced AT Commands
----------------------	--