



**VX-P60-B**

**USER GUIDE**

# VX-P60-B

## Main Interface & Controls



- 1. Extendable Headband
- 2. Leatherette Ear Cushion
- 3. Teams Hook Button
- 4. MFB Stick Switch
- 5. Speaker Chamber
- 6. Microphone Chamber

- 7. Headrest (Mono Version)
- 8. Power/Mute Button
- 9. USB Connection Jack
- 10. LED Indicator



## Product Specifications

**Weight/Size:** (Mono) 110g (Stereo) 148g, 182x162x32mm

**Wearing Style:** Over-the-head On-ear

**Connectivity:** Bluetooth 5.1, USB-C

**Microphone Specifications:** Omni-Directional, 4mm, Dual Mic

**Microphone Sensitivity:**  $-30 \pm 3\text{dB}$  @1kHz 0dB=1V/pa

**Microphone Response:** 100 - 10,000Hz

**Speaker Specifications:** 40mm, 20mW to 30mW (Per Speaker),  $32\Omega \pm 15\%$

**Speaker Sensitivity:**  $102 \pm 3\text{dB}$  @1kHz 1mv

**Speaker Response:** 20 - 20,000Hz

**Battery Specs:** 35h (Music), 26h (Call) >350h (Standby), 1.5 h (0% to full)

**Bluetooth:** QCC3034, Version 5.1, up to 10m

**Bluetooth Device Name:** VX-P60 passcode: 0000 (4 zeros)

**Operating Environments:** 0° to 45°C, <90% Relative Humidity

**Storage Environments:** -20° to 35°C (6 Months)

35° to 45°C (3 Months)

45°C (1 Month)

60° to 70°C (1h No Degradation)

70° to 85°C (Max 1h, <20% Degradation)

65%  $\pm$ 20% Relative Humidity

**Contents in the Box:** VX-P60-B Headset x1, USB C-to-A Cable x1, User Guide x1

## Powering Up Headset



### **Powering On/Off**

With the headset turned off, press and hold the (8) **Power/Mute Button** for 3 seconds. Voice prompt "Power On", (10) **LED Indicator** flashes blue for a few seconds. It will enter pairing mode on first use, LED flashes red and blue. Hold button again for 3 seconds to power off. LED flashes Red with voice prompt.

## Bluetooth Pairing

### **Direct Bluetooth Pairing**

On first setup, VX-P60-B will automatically enter into pairing mode after power on, indicated by the LED Indicator flashing red/blue. Go to the device you wish to pair, choose the device name "VX-P60" and start pairing. To manually enter Pairing Mode, make sure VX-P60-B is powered off.

Press and hold the (8) **Power/Mute Button** for 5 seconds, indicated by the LED Indicator flashing red/blue alternatively.



## USB Charging and USB Audio



### **Battery Low Alert**

When the battery level is low, (10) LED Indicator will flash red twice every 10 minutes, audio prompting "Battery Low" every 10 minutes. Recharge immediately or else the headset will auto power-off once the battery is lower than 3.1V.

### **Recharging Headset**

Connect any USB Type-C cable from the (9) USB Connection Jack to any USB power source. (10) LED Indicator will light up

in steady RED during charging and switch to BLUE when the headset is fully charged.

### **USB Audio Connection**

When connected to a computer (USB-C to USB-A) or tablet (USB-C to USB-C) VX-P60-B will charge its battery, indicated by the LED lighting up in red. However, during charging, you can still use the headset via the USB connection. VX-P60-B is universally compatible with all USB audio device, so there is no need to install drivers, 100% plug and play.

## Control and Operation


### **MS Teams Hook Button**

VX-P60-B is designed to work with Microsoft Teams natively. Make sure you have followed the guide on how to pair the headset with PC.

If you have MS Teams already installed, the program will notify that the headset is Teams compatible and you can sync device buttons with it.



## Control and Operation

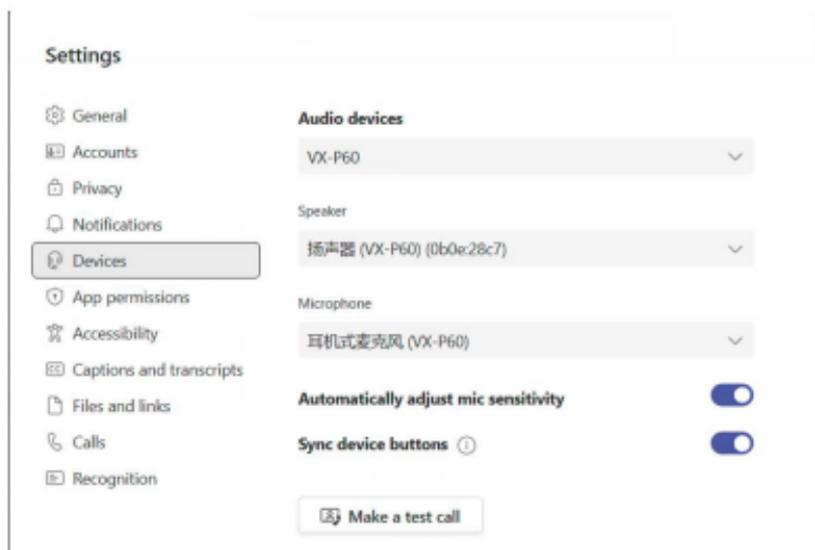

To make sure the setup is correct, open MS Teams > Settings > Devices, you should be able to see the Audio devices, speaker and microphone showing "VX-P60" as the selected driver. If you do not see this, choose "VX-P60" from the drop-down menu.

Make sure you have checked/selected "Sync device buttons". You can test whether the VX-P60-B headset is linked properly by choosing to "Make a test call".



### **Music Operation (Bluetooth)**

If connected directly to a tablet, smartphone or computer, with any music app launched, you can control music directly from the headset. Increase volume by moving the (4) MFB Stick upward once, reduce volume by moving downward once.

Press straight down on (4) MFB Stick for media Play/Pause. To skip to next media track, move and hold (4) MFB Stick upward

for 1 second. To replay the track, move and hold (4) downward for 1 second.

### **Music Operation (USB)**

The (4) MFB Stick control for volume adjustment is the same via USB mode.

### **Call Operation**

Once connected to your smartphone, you are ready to receive or make calls directly from the headset.

During an incoming call, click **(3)** Teams Hook Button once to answer. During a call, click **(3)** at any time to end a call. You can also transfer the call from the headset to the smartphone by double clicking **(3)**. To reject a call, press and hold **(3)** for 1s.



### **Clear Previous Pairing Records**

If connection becomes unstable or it takes a long time to pair/connect to new device, try clearing the pairing records stored inside VX-P60-B.

Click and hold both **(3)** and **(4)** for four seconds to clear memory, LED will flash red 3 times indicating VX-P60-B has removed all pairing records, same as factory settings.




### **Microphone Arm Mute**

Aside from microphone mute by controlling your device, VX-P60-B comes with mechanical mute simply by rotating the mic boom to a perpendicular position as shown in the image.

An audio tone will prompt "Mute ON" when the mic boom is rotated to the mute position.

To unmute, simply rotate the mic boom back downwards and you will hear a "Mute Off" audio tone prompt indicating mic is now un-muted.



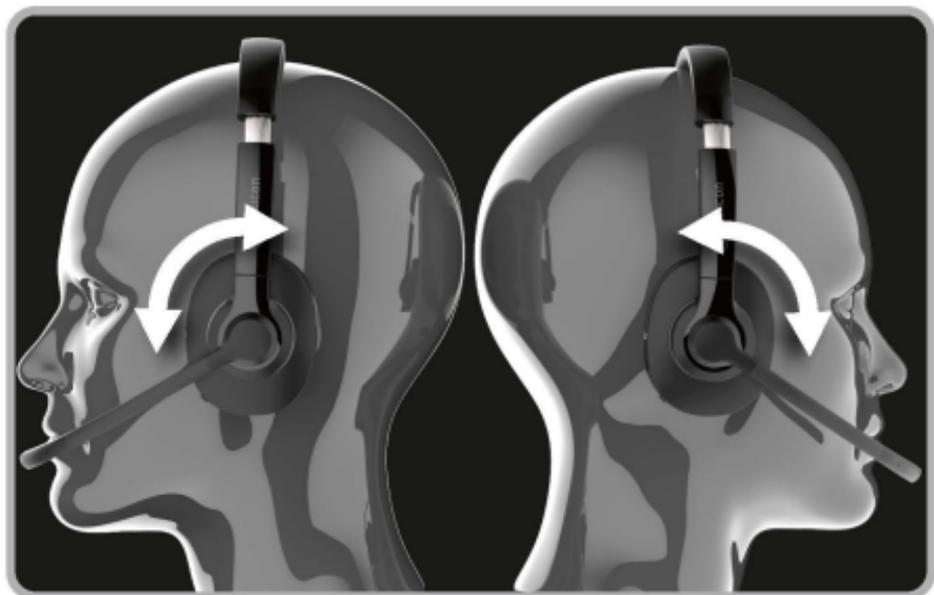

### **Wearing Style | Left or Right**

VX-P60-B can be worn with the microphone on the right or on the left. Simply rotate the microphone boom as shown above for your preferred wearing style.

### **Microphone Positioning**

**Optimal Position**  
Rotate the mic boom as shown and lightly bend the boom arm towards your mouth. Keep about 0.5 inch distance only.



## Quick Guide for Controls

	Function	Action
	Headset On/Off	Long press <b>Power Button</b> for 2 seconds
	Auto Power off	Battery lower than 3.1V Without connection for 10m
	Enter Pairing	Long press <b>Power Button</b> for 4 seconds during Power Off
	Cancel Pairing	Click <b>Power Button</b> once during pairing mode
	Clear Pairing List	Long press <b>Power Button &amp; Teams Hook Switch</b> for 4 seconds
	Answer/End Call	Click once <b>Teams Hook Switch</b> LED flashes blue before answer
	Reject Call	Long press <b>Teams Hook Switch</b> for 1s during incoming call
	Play/Pause Media	Click <b>MFB Stick Switch</b> once during audio/video playback
	Volume Up/Down	Push <b>MFB Stick Switch</b> upward for Vol +, downward for Vol -
	Previous/Next Track	Push and hold <b>MFB Stick Switch</b> for 1s in either direction

## Frequently Asked Questions

### **Question 1. The headset is unresponsive, LED Indicator doesn't light up.**

VX-P60-B requires battery power, and it comes with Lithium Polymer battery that needs to be charged. In some rare situation, the headset battery may be depleted even before first use. Simply plug in the USB-C charging cable into any standard 5V USB charger for at least 30 minutes. Try power-on again, the LED indicator should light up. If after prolonged charging, the indicator still remains inactive, contact your system integrator or retailer for support or repair.

### **Question 2. How do I connect VX-P60-B to my desktop computer? There is no bluetooth icon in the taskbar.**

Not all desktop computers come with bluetooth connectivity. If you do not see a bluetooth icon in the taskbar, there is a high chance your computer does not come with a bluetooth adaptor. Connect an UAC bluetooth dongle or bluetooth adaptor if necessary.

### **Question 3. How do I connect to a second device?**

Connect to the Device A normally, then turn off the bluetooth on the first device, VX-P60-B will return to device searching mode. Pair using Device B, and when successful, turn bluetooth back on for Device A.

### **Question 4. My device is asking for a password, what is it?**

Some legacy device or older product will ask for a bluetooth password during the first-time connection. There is no need to set up a password, simple use the generic code of "0000" to connect. If that fails, try "8888", "1111" and "1234".

## Precautions

Do not charge your headset with any USB power charger of voltage higher than 5V or current higher than 2A. Do not place or store your headset in any hot or excessively humid place. Do not clean your headset with any form of chemical substance, only use warm water. Do not try to disassemble any part of the headset except replacing the leatherette ear cushions. Do not use or place the headset in environments of excessive dust or minute particles. Failure to follow the above advice will violate your warranty without any further need of justifications.