

Bluetooth multi-device keyboard **US 1-1**

Package Contents

- Cordless Keyboard
- USB Receiver
- USB Charging Cable
- Quick Installation Guide

System Requirements

- BLE5.0 mode : PC with Microsoft Windows® 10
- Mac with macOS 10.9 or higher
- Available USB Port

Features

- Slim profile with aluminum construction and built-in rechargeable Lithium battery
- Connect and switch between up to 3 devices with Bluetooth
- Compatible with Windows and macOS
- Scissor keyswitches for quiet, stable and smooth keystroke

Specifications

Keyboard

- Product Name : VOXICON WIRELESS SLIM METAL KEYBOARD 295B SILVER
- Product Model : DK-295B-WHT
- Connection : BLE 5.0
- Key : 108 Keys

Bluetooth multi-device keyboard **US 1-2**

- Keyswitch : Scissor Keyswitch
- Key Travel : 1.80± 0.30 mm
- Key Force : 60± 15g
- Numeric / Caps Lock / Low Power / Charging Indicator
- Power On/Off Switch
- Effective Distance : Approx. 8 m / 26 ft
- Battery Life : Approx. 3 months (4 hrs/day , 5 days/week)
- Power : DC 5V
- Charging Interface : USB Type C
- Charge time : 2~3 hours
- Battery Capacity : 350 mAh
- Dimension : 440(L) × 128(W) × 17 (H) mm
- Weight : Approx. 545g

Receiver

- Interface: USB
- Dimension: 18.6 (L) × 14.5 (W) × 6.1 (H) mm


Product Information

LED Indicator

- 1** : Caps Lock Indicator
- A** : Numeric Lock Indicator
- ↓** : Scroll Lock Indicator
Mac / Win exchange Indicator
- ⚡** : Charging Indicator (Red)
Red Blinking : Low Power
Red Static : Charging
Red Off : Fully Charged


Bluetooth multi-device keyboard **US 1-3**

Product Functions

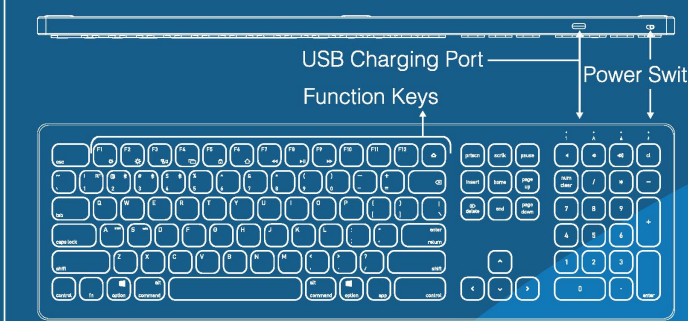

Bluetooth Connection (up to 3 devices)

1. Enable Bluetooth slots by pressing Fn+2/3/4 to connect and switch between up to 3 devices
2. Turn on Bluetooth of your computer and enable discovery mode
3. Turn on keyboard and make sure it has enough power
4. Press and hold Fn+2/3/4 to pair (Bluetooth connection indicator will blink)
5. The connection indicator will no longer blink when pairing is finish
6. Switch the keyboard to specific mode depending on your system. Press Fn+S for Windows and Fn+A for macOS.

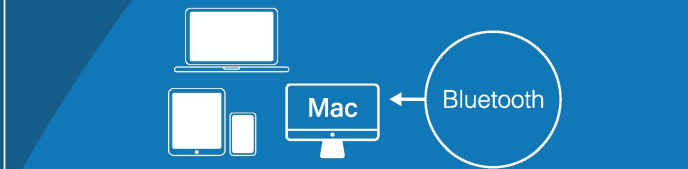

Bluetooth multi-device keyboard **US 1-4**

Device Mode Switching Instructions

After successfully paired with device using Bluetooth connection, the keyboard can be switched to specific devices with the following hotkeys:

- Bluetooth A : Fn + 2
- Bluetooth B : Fn + 3
- Bluetooth C : Fn + 4

Multimedia Keys

This keyboard supports Windows and macOS. You can switch to specific keyboard mode depending on your system. Hotkeys will work properly under correct mode to respective system.

FN + **S** ^{win} : Switch to Windows mode, Short blink after switching

FN + **A** ^{mac} : Switch to macOS mode, Short blink after switching

Windows Mode Function Keys:

FN + **F1** : Decrease Screen Brightness (depending on device support)

FN + **F2** : Increase Screen Brightness (depending on device support)

FN + **F3** : Task View

FN + **F4** : File Explorer : Multimedia Player

Bluetooth multi-device keyboard **US 1-5**

FN + **F5** : Lock Your PC : Mute

FN + **F6** : Browser Homepage : Volume Down

FN + **F7** : Previous Track : Volume Up

FN + **F8** : Play / Pause : Calculator

FN + **F9** : Next Track

macOS Mode Function Keys:

F1 : Decrease Screen Brightness (depending on device support)

F2 : Increase Screen Brightness (depending on device support)

F3 : Mission Control

F4 : Open Finder and Search with Spotlight

Bluetooth multi-device keyboard **US 1-6**

F5 : Lock Your Mac : Eject

F6 : Browser Homepage : Mute

F7 : Previous Track : Volume Down

F8 : Play / Pause : Volume Up

F9 : Next Track : F16

Troubleshooting & Cautions

- If your cordless keyboard does not work normally:
- Check if the keyboard is appropriately paired to your computer and switched to the right device slot by pressing Fn+ 2/3/4. If needed, please follow the pairing instructions to re-pair.
 - Check if the keyboard is switched to the right mode (Windows / macOS mode) depending on the system of your device.
 - Red colored light indicator will blink when keyboard is in low power. Please charge.
 - Metal objects close to or in between the keyboard may reduce cordless performance. Try moving metal objects away from the keyboard.

Bluetooth multi-device keyboard **US 1-7**

- For saving power, the keyboard goes into sleep mode when it's not in use for a while. Press any key and wait a second to bring the keyboard out of sleep mode.
- Charge the battery of your keyboard before storing it without use. Store your keyboard with low battery and low battery voltage for long periods of time may cause malfunction.
- When your keyboard is not in use, we recommend turning off the keyboard.

Declares that the design and manufacturing of this product complies with the European directives for CE-marking as stated below:

- 2014/35/EU (LVD)
- 2014/30/EU (EMC)
- 2011/65/EU (RoHS)
- 2017/53/EU (RED)

