

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: Prokord

Supplier's address: Dustin, Metallvägen 36, 195 72 Rosersberg Uppland, SE

Model identifier: PSH-GU1045-CCT

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	GU10		
Mains or non-mains:	MLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes


Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	4	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	352 in Wide cone (120°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2700...6500
On-mode power (P_{on}), expressed in W	4,5	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,45
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	0,45	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	82
Outer dimensions without separate control gear, lighting control	Height	58	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	50	
	Depth	58	
			See image in last page


parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,313 0,346
Parameters for directional light sources:			
Peak luminous intensity (cd)	168	Beam angle in degrees, or the range of beam angles that can be set	103
Parameters for LED and OLED light sources:			
R9 colour rendering index value	3	Survival factor	1,00
the lumen maintenance factor	1,00		
Parameters for LED and OLED mains light sources:			
displacement factor (cos ϕ_1)	0,52	Colour consistency in McAdam ellipses	5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,0	Stroboscopic effect metric (SVM)	0,0

(a) '-': not applicable;

(b) '-': not applicable;

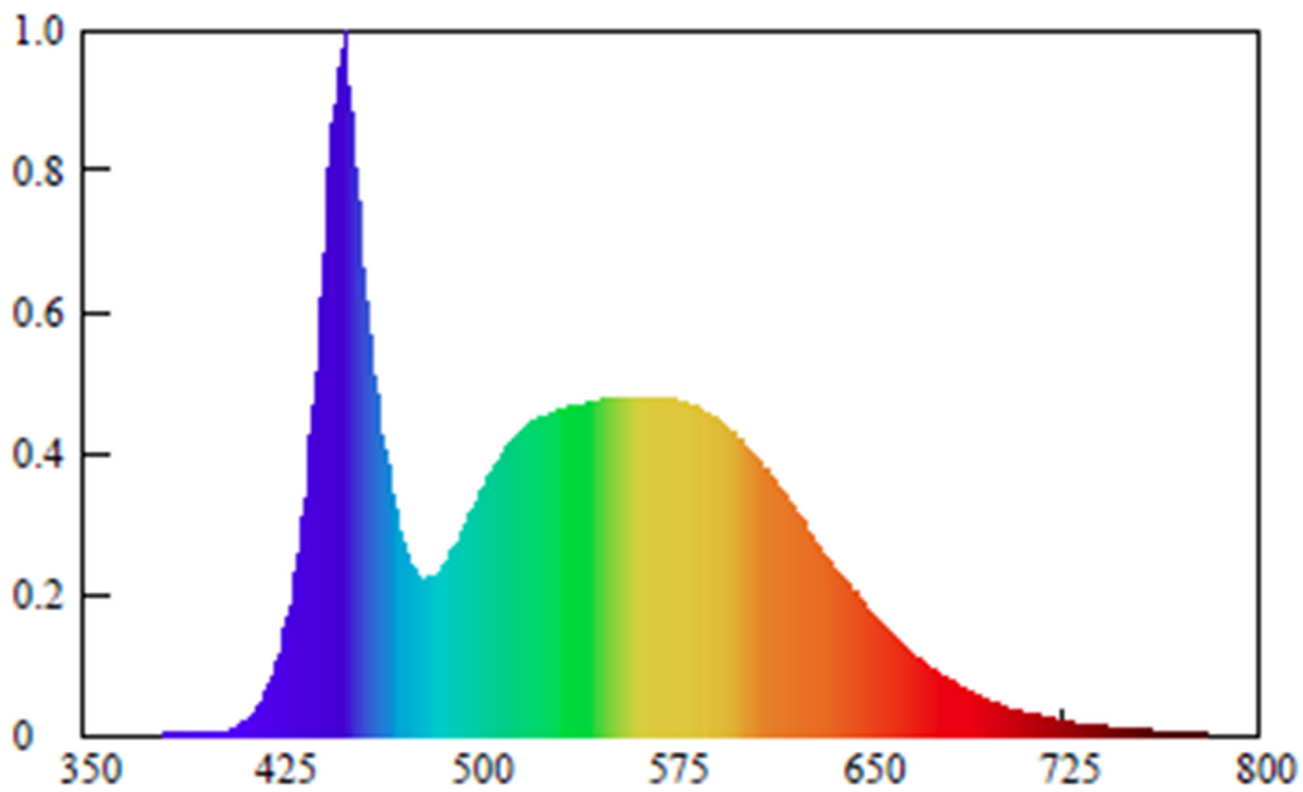

Model placed on the Union market from 30/05/2020



EPREL registration number: 1434829

<https://eprel.ec.europa.eu/qr/1434829>

Supplier: Dustin Aktiebolag (Manufacturer)

Website: www.voxicon.se

Customer care service:

Name: Dustin

Website: dustin.se

Email: kundservice@dustin.se

Phone: 08-553 44 800

Address:

Metallvägen 36
195 72 Rosersberg
Sweden